

ALO40Y48N-L

ALO40Y48N-L Information

| kelsents. | ALO40Y48N-L Artesyn Embedded Technologies Power Supplies - Board Mount DC DC Converters CONV DC-DC 120W 48VIN 1.8V 8-DIP Module, 1/8 Brick For the pricing/inventory/lead time, please contact us | |
|--------------------|--|-----------------|
| For Reference Only | Website: https://www.heisener.com E-mail: salesdept@heisener.com | Request a Quote |

For Reference Only

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.




ALO40Y48N-L Specifications

| _ | | |
|--------------------------|---|--|
| Manufacturer Part Number | ALO40Y48N-L | |
| Manufacturer | Artesyn Embedded Technologies | |
| Category | Power Supplies - Board Mount | |
| | DC DC Converters | |
| Package | 8-DIP Module, 1/8 Brick | |
| Series | ALO40 | |
| Туре | Isolated Module | |
| Number of Outputs | 1 | |
| Voltage - Input (Min) | 36V | |
| Voltage - Input (Max) | 75V | |
| Voltage - Output 1 | 1.8V | |
| Voltage - Output 2 | - | |
| Voltage - Output 3 | - | |
| Voltage - Output 4 | - | |
| Current - Output (Max) | 40A | |
| Power (Watts) | 120W | |
| Voltage - Isolation | 1.5kV (1500V) | |
| Applications | ITE (Commercial) | |
| Features | Remote On/Off, OCP, OTP, OVP, UVLO | |
| Operating Temperature | -40°C ~ 85°C | |
| Efficiency | 88% | |
| Mounting Type | Through Hole | |
| Package / Case | 8-DIP Module, 1/8 Brick | |
| Size / Dimension | 2.30" L x 0.90" W x 0.32" H (58.4mm x 22.9mm x 8.1mm) | |
| | | |

| Supplier Device Package | |
|-------------------------|----------------|
| Control Features | - |
| | Report errors? |
| | |

ALO40Y48N-L Guarantees

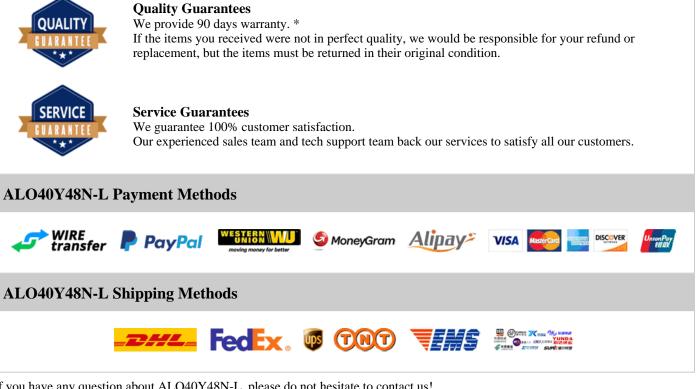

If you have any question about ALO40Y48N-L, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com