


ALZ11B12W

ALZ11B12W Information

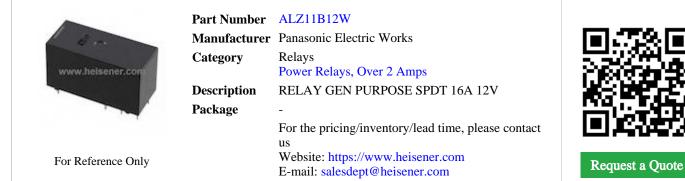

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



ALZ11B12W Specifications

Coil Voltage12VDCContact FormSPDT (1 Form C)Contact Rating (Current)16ASwitching Voltage440VAC - MaxTurn On Voltage (Max)8.4 VDCTurn Off Voltage (Min)1.2 VDCOperate Time15msRelease Time5msFeaturesInsulation - Class B, Sealed - Flux Protection		
RelaysPackage-Package-SeriesALZRelay TypeGeneral PurposeCoil TypeNon LatchingCoil Current33.3mACoil Voltage12VDCContact FormSPDT (1 Form C)Contact Rating (Current)16ASwitching Voltage440VAC - MaxTurn ON Voltage (Max)1.2 VDCQoreate Time5.5mSRelease Time5.5mSRelease TimeFinsFaturesInsulation - Class B, Sealed - Flux ProtectionTorning TypeCip FinsTorning TypeCip FinsStating Type	Manufacturer Part Number	ALZ11B12W
Power Relays, Over 2 AmpsPackage-SeriesALZRelay TypeGeneral PurposeCoil TypeNon LatchingCoil Current33.3mACoil Voltage12VDCContact FormSPDT (1 Form C)Contact Rating (Current)16ASwitching Voltage (Max)8.4 VDCTurn On Voltage (Max)1.2 VDCOperate Time1.5 msRelease Time5msFeaturesInsulation - Class B, Sealed - Flux ProtectionMounting TypePC Pin	Manufacturer	Panasonic Electric Works
Package-SeriesALZRelay TypeGeneral PurposeCoil TypeNon LatchingCoil Current33.3mACoil Voltage12VDCContact FormSPDT (1 Form C)Contact Rating (Current)16ASwitching Voltage440VAC - MaxTurn On Voltage (Max)8.4 VDCQperate Time15msRelease Time5msFeaturesInsulation - Class B, Sealed - Flux ProtectionFormination StylePC Pin	Category	Relays
SeriesALZRelay TypeGeneral PurposeCoil TypeNon LatchingCoil Current33.3mACoil Voltage12VDCContact FormSPDT (1 Form C)Contact Rating (Current)16ASwitching Voltage440VAC - MaxTurn On Voltage (Max)8.4 VDCTurn Off Voltage (Min)1.2 VDCOperate Time5msRelease Time5msFeaturesInsulation - Class B, Sealed - Flux ProtectionMounting TypePC Pin		Power Relays, Over 2 Amps
Relay TypeGeneral PurposeCoil TypeNon LatchingCoil Current33.3mACoil Voltage12VDCContact FormSPDT (1 Form C)Contact Rating (Current)16ASwitching Voltage440VAC - MaxTurn On Voltage (Max)8.4 VDCOperate Time1.2 VDCOperate Time5msRelease Time5msFeaturesInsulation - Class B, Sealed - Flux ProtectionMounting TypePC Pin	Package	-
Coil TypeNon LatchingCoil Current33.3mACoil Voltage12VDCContact FormSPDT (1 Form C)Contact Rating (Current)16ASwitching Voltage440VAC - MaxTurn On Voltage (Max)8.4 VDCTurn Off Voltage (Min)1.2 VDCOperate Time15msRelease Time5msFeaturesInsulation - Class B, Sealed - Flux ProtectionMounting TypePC Pin	Series	ALZ
Coil Current33.3mACoil Voltage12VDCContact FormSPDT (1 Form C)Contact Rating (Current)16ASwitching Voltage440VAC - MaxTurn On Voltage (Max)8.4 VDCTurn Off Voltage (Min)1.2 VDCOperate Time15msRelease Time5msFeaturesInsulation - Class B, Sealed - Flux ProtectionMounting TypeThrough HolePC PinPC Pin	Relay Type	General Purpose
Coil Voltage12VDCContact FormSPDT (1 Form C)Contact Rating (Current)16ASwitching Voltage440VAC - MaxTurn On Voltage (Max)8.4 VDCTurn Off Voltage (Min)1.2 VDCOperate Time5msRelease Time5msFeaturesInsulation - Class B, Sealed - Flux ProtectionMounting TypePC Pin	Coil Type	Non Latching
Contact FormSPDT (1 Form C)Contact Rating (Current)16ASwitching Voltage440VAC - MaxTurn On Voltage (Max)8.4 VDCTurn Off Voltage (Min)1.2 VDCOperate Time15msRelease Time5msFeaturesInsulation - Class B, Sealed - Flux ProtectionMounting TypeThrough HolePC PinPC	Coil Current	33.3mA
Contact Rating (Current)16ASwitching Voltage440VAC - MaxTurn On Voltage (Max)8.4 VDCTurn Off Voltage (Min)1.2 VDCOperate Time15msRelease Time5msFeaturesInsulation - Class B, Sealed - Flux ProtectionMounting TypeThrough HolePC PinPC Pin	Coil Voltage	12VDC
Switching Voltage440VAC - MaxTurn On Voltage (Max)8.4 VDCTurn Off Voltage (Min)1.2 VDCOperate Time15msRelease Time5msFeaturesInsulation - Class B, Sealed - Flux ProtectionMounting TypeThrough HoleTermination StylePC Pin	Contact Form	SPDT (1 Form C)
Turn On Voltage (Max)8.4 VDCTurn Off Voltage (Min)1.2 VDCOperate Time15msRelease Time5msFeaturesInsulation - Class B, Sealed - Flux ProtectionMounting TypeThrough HoleFermination StylePC Pin	Contact Rating (Current)	16A
Turn Off Voltage (Min)1.2 VDCOperate Time15msRelease Time5msFeaturesInsulation - Class B, Sealed - Flux ProtectionMounting TypeThrough HoleTermination StylePC Pin	Switching Voltage	440VAC - Max
Operate Time15msRelease Time5msFeaturesInsulation - Class B, Sealed - Flux ProtectionMounting TypeThrough HoleTermination StylePC Pin	Turn On Voltage (Max)	8.4 VDC
Release Time5msFeaturesInsulation - Class B, Sealed - Flux ProtectionMounting TypeThrough HoleTermination StylePC Pin	Turn Off Voltage (Min)	1.2 VDC
FeaturesInsulation - Class B, Sealed - Flux ProtectionMounting TypeThrough HoleTermination StylePC Pin	Operate Time	15ms
Mounting TypeThrough HoleTermination StylePC Pin	Release Time	5ms
Termination Style PC Pin	Features	Insulation - Class B, Sealed - Flux Protection
	Mounting Type	Through Hole
Report errors?	Termination Style	PC Pin
		Report errors?

ALZ11B12W Guarantees



Quality Guarantees

We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.

SERVICE

Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

ALZ11B12W Payment Methods



If you have any question about ALZ11B12W, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com