


ALZ51B24

ALZ51B24 Information

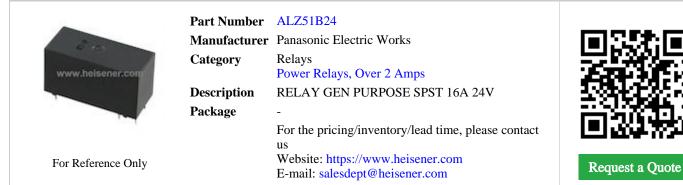

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



ALZ51B24 Specifications

Manufacturer Part Number ALZ51B24 Manufacturer Panasonic Electric Works Category Relays Package Power Relays, Over 2 Amps Package - Series ALZ Relay Type General Purpose Coil Orype Non Latching Coil Orype 16.7mA Coil Orotact Form SPST-NO (1 Form A) Cotact Form 16A Switching (Ourrent) 16A Switching Voltage 440VAC - Max Turn On Voltage (Max) 16.8 VDC Operate Time Jsms Release Time Sms Features Insulation - Class B, Sealed - Flux Protection Mounting Type Through Hole		
RelaysPackagePackageSeriesRelay TypeColl TypeColl CurrentColl CurrentContact FormContact Rating (Current)Sortick SubjectSwitching VoltageContact Rating (Current)Contact Rating (Current)Switching VoltageCurrentContact Rating (Current)Subject Rating (Current)Sing Current)Subject Rating (Current)Subject Rating (Current) <td>Manufacturer Part Number</td> <td>ALZ51B24</td>	Manufacturer Part Number	ALZ51B24
Power Relays, Over 2 AmpsPackage-SeriesALZRelay TypeGeneral PurposeCoil TypeNon LatchingCoil Current16.7mAColtage24VDCContact FormSPST-NO (1 Form A)Contact Rating (Current)16ASwitching Voltage440VAC - MaxTurn On Voltage (Max)16.8 VDCCurnent Singer15msRelease Time5msRelease Time5msFeaturesInsulation - Class B, Sealed - Flux ProtectionTorniation StylePC Pin	Manufacturer	Panasonic Electric Works
Package-SeriesALZRelay TypeGeneral PurposeCoil TypeNon LatchingCoil Current16.7mAColl Voltage24VDCContact FormSPST-NO (1 Form A)Contact Rating (Current)16ASwitching Voltage440VAC - MaxTurn On Voltage (Max)16.8 VDCQperate Time24 VDCRelease TimeSmsRelease TimeSmsFeaturesInsulation - Class B, Sealed - Flux ProtectionMounting TypePC Pin	Category	Relays
SeriesALZRelay TypeGeneral PurposeCoil TypeNon LatchingCoil Current16.7mACoil Voltage24VDCContact FormSPST-NO (1 Form A)Contact Rating (Current)16ASwitching Voltage440VAC - MaxTurn On Voltage (Max)16.8 VDCCurnent Guerent5.9mSOperate Time5.9mSRelease Time5.msFeaturesInsulation - Class B, Sealed - Flux ProtectionMounting TypeCP inTermination StyleCP in		Power Relays, Over 2 Amps
Relay TypeGeneral PurposeCoil TypeNon LatchingCoil Current16.7mACoil Voltage24VDCContact FormSPST-NO (1 Form A)Contact Rating (Current)16ASwitching Voltage440VAC - MaxTurn On Voltage (Max)16.8 VDCOperate Time2.4 VDCOperate Time5msRelease Time5msFeaturesInsulation - Class B, Sealed - Flux ProtectionMounting TypeCP inTermination StylePC in	Package	-
Coil TypeNon LachingCoil Current16.7mACoil Voltage24VDCContact FormSPST-NO (1 Form A)Contact Rating (Current)16ASwitching Voltage440VAC - MaxTurn On Voltage (Max)16.8 VDCOperate Time2.4 VDCRelease Time5msFeaturesInsulation - Class B, Sealed - Flux ProtectionMounting TypePie pie pieTermination StylePie pie	Series	ALZ
Coil Current16.7mACoil Voltage24VDCContact FormSPST-NO (1 Form A)Contact Rating (Current)16ASwitching Voltage440VAC - MaxTurn On Voltage (Max)16.8 VDCTurn Off Voltage (Min)2.4 VDCOperate Time15msRelease Time5msFeaturesInsulation - Class B, Sealed - Flux ProtectionMounting TypeCP inPerinnation StylePC Pin	Relay Type	General Purpose
Coil Voltage24VDCContact FormSPST-NO (1 Form A)Contact Rating (Current)16ASwitching Voltage440VAC - MaxTurn On Voltage (Max)16.8 VDCTurn Off Voltage (Min)2.4 VDCOperate Time15msRelease Times5msFeaturesInsulation - Class B, Sealed - Flux ProtectionMounting TypePC PinPerintation StylePC Pin	Coil Type	Non Latching
Contact FormSPST-NO (1 Form A)Contact Rating (Current)16ASwitching Voltage440VAC - MaxTurn On Voltage (Max)16.8 VDCTurn Off Voltage (Min)2.4 VDCOperate Time15msRelease Time5msFeaturesInsulation - Class B, Sealed - Flux ProtectionMounting TypePC Pin	Coil Current	16.7mA
Contact Rating (Current)16ASwitching Voltage440VAC - MaxTurn On Voltage (Max)16.8 VDCTurn Off Voltage (Min)2.4 VDCOperate Time15msRelease Time5msFeaturesInsulation - Class B, Sealed - Flux ProtectionMounting TypeThrough HolePC PinPC Pin	Coil Voltage	24VDC
Switching Voltage440VAC - MaxTurn On Voltage (Max)16.8 VDCTurn Off Voltage (Min)2.4 VDCOperate Time15msRelease Time5msFeaturesInsulation - Class B, Sealed - Flux ProtectionMounting TypeThrough HoleTermination StylePC Pin	Contact Form	SPST-NO (1 Form A)
Turn On Voltage (Max)16.8 VDCTurn Off Voltage (Min)2.4 VDCOperate Time15msRelease Time5msFeaturesInsulation - Class B, Sealed - Flux ProtectionMounting TypeThrough HoleTermination StylePC Pin	Contact Rating (Current)	16A
Turn Off Voltage (Min)2.4 VDCOperate Time15msRelease Time5msFeaturesInsulation - Class B, Sealed - Flux ProtectionMounting TypeThrough HoleTermination StylePC Pin	Switching Voltage	440VAC - Max
Operate Time15msRelease Time5msFeaturesInsulation - Class B, Sealed - Flux ProtectionMounting TypeThrough HoleTermination StylePC Pin	Turn On Voltage (Max)	16.8 VDC
Release Time5msFeaturesInsulation - Class B, Sealed - Flux ProtectionMounting TypeThrough HoleTermination StylePC Pin	Turn Off Voltage (Min)	2.4 VDC
FeaturesInsulation - Class B, Sealed - Flux ProtectionMounting TypeThrough HoleTermination StylePC Pin	Operate Time	15ms
Mounting TypeThrough HoleTermination StylePC Pin	Release Time	5ms
Termination Style PC Pin	Features	Insulation - Class B, Sealed - Flux Protection
	Mounting Type	Through Hole
Report errors?	Termination Style	PC Pin
		Report errors?

ALZ51B24 Guarantees



Quality Guarantees

We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.

SERVICE BUARANTEE

Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.



If you have any question about ALZ51B24, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com