


ARX1212

ARX1212 Information

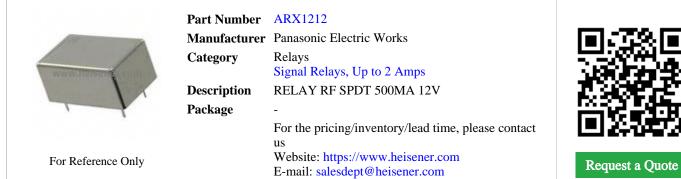

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



ARX1212 Specifications

Manufacturer Part Number ARX1212 Manufacturer Panasonic Electric Works Category Relays Otagory Signal Relays, Up to 2 Amps Package - Series ARX Relay Type Ref Coil Type Latching, Dual Coil Coil Current 33.3mA Coil Voltage 12VDC Contact Form SPDT (I Form C) Contact Rating (Current) 500mA Switching Voltage (Max) 9 VDC - Max Turn On Voltage (Max) 9 VDC Querea Time Ioms Release Time Gms Features - Mounting Type Through Hole		
CategoryRelaysPackage-Package-SeriesARXRelay TypeRFCoil TypeIatching, Dual CoilCoil Current33.mACoil VoltageIVDCContact FormSOPDT (1 Form C)Contact Rating (Current)500mASwitching Voltage30VDC - MaxTurn On Voltage (Max)9 VDCQuerter TimeImage: Second	Manufacturer Part Number	ARX1212
Signal Relays, Up to 2 AmpsPackage-SeriesARXRelay TypeRFCoil TypeLatching, Dual CoilCoil Current33.3mACold VoltageI2VDCContact FormSPDT (1 Form C)Contact Rating (Current)500mASwitching Voltage30VDC - MaxTurn On Voltage (Max)9 VDCCurrent FineGomsRelease TimeGmsRelease Time-Fatures-Mounting TypeThrough HoleTermination StyleCP in	Manufacturer	Panasonic Electric Works
Package-SeriesARXRelay TypeRFCoil TypeLatching, Dual CoilCoil Current33.3mACoil Voltage12VDCContact FormSPDT (1 Form C)Contact Rating (Current)500mASwitching Voltage30VDC - MaxTurn On Voltage (Max)9 VDCQperate Time6msRelease Time-Features-Mounting TypeThrough HoleTermination StyleCP in	Category	Relays
SeriesARXRelay TypeRFCoil TypeLaching, Dual CoilCoil Qurent33.3mACoil VoltageI2VDCContact FormSPDT (1 Form C)Contact Rating (Current)500mASwitching Voltage30VDC - MaxTurn On Voltage (Max)9 VDCTurn Off Voltage (Min)-Qerate TimeIomsRelease Time6msFeatures-Mounting TypeCP inTermination StylePC Pin		Signal Relays, Up to 2 Amps
Relay TypeRFCoil TypeLatching, Dual CoilCoil Type33.3mACoil Oltage12VDCContact FormSPDT (1 Form C)Contact Rating (Current)500mASwitching Voltage (Max)9VDC - MaxTurn On Voltage (Min)-Operate Time10msRelase Time6msFeatures-Mounting TypeCircling HoleTermination StyleCirclingContant StyleCirclingContant StyleCirclingContart Style </td <td>Package</td> <td>-</td>	Package	-
Coil TypeLatching, Dual CoilCoil Type33.3mACoil Current33.3mACoil Voltage12VDCContact FormSPDT (1 Form C)Contact Rating (Current)500mASwitching Voltage30VDC - MaxTurn On Voltage (Max)9 VDCTurn Off Voltage (Min)-Operate TimefomsRelease Time-Features-Mounting TypeThrough HoleTermination StylePC Pin	Series	ARX
Coil Current33.3mACoil Voltage12VDCContact FormSPDT (1 Form C)Contact Rating (Current)500mASwitching Voltage30VDC - MaxTurn On Voltage (Max)9 VDCTurn Off Voltage (Min)-Operate Time10msRelease Time6msFeatures-Mounting TypeThrough HoleTermination StylePC Pin	Relay Type	RF
Coil Voltage12VDCContact FormSPDT (1 Form C)Contact Rating (Current)500mASwitching Voltage30VDC - MaxTurn On Voltage (Max)9 VDCTurn Off Voltage (Min)-Operate Time10msRelease Time6msFeatures-Mounting TypeThrough HoleTermination StylePC Pin	Coil Type	Latching, Dual Coil
Contact FormSPDT (1 Form C)Contact Rating (Current)500mASwitching Voltage30VDC - MaxTurn On Voltage (Max)9 VDCTurn Off Voltage (Min)-Operate Time10msRelease Time6msFeatures-Mounting TypeThrough HoleFermination StylePC Pin	Coil Current	33.3mA
Contact Rating (Current)500mASwitching Voltage30VDC - MaxTurn On Voltage (Max)9 VDCTurn Off Voltage (Min)-Operate Time10msRelease Time6msFeatures-Mounting TypeThrough HoleFermination StylePC Pin	Coil Voltage	12VDC
Switching Voltage30VDC - MaxTurn On Voltage (Max)9 VDCTurn Off Voltage (Min)-Operate Time10msRelease Time6msFeatures-Mounting TypeThrough HoleTermination StylePC Pin	Contact Form	SPDT (1 Form C)
Turn On Voltage (Max)9 VDCTurn Off Voltage (Min)-Operate Time10msRelease Time6msFeatures-Mounting TypeThrough HoleFermination StylePC Pin	Contact Rating (Current)	500mA
Turn Off Voltage (Min)-Operate Time10msRelease Time6msFeatures-Mounting TypeThrough HoleTermination StylePC Pin	Switching Voltage	30VDC - Max
Operate Time10msRelease Time6msFeatures-Mounting TypeThrough HoleTermination StylePC Pin	Turn On Voltage (Max)	9 VDC
Release Time6msFeatures-Mounting TypeThrough HoleTermination StylePC Pin	Turn Off Voltage (Min)	-
Features-Mounting TypeThrough HoleTermination StylePC Pin	Operate Time	10ms
Mounting TypeThrough HoleTermination StylePC Pin	Release Time	6ms
Termination Style PC Pin	Features	-
· ·	Mounting Type	Through Hole
Report errors?	Termination Style	PC Pin
Report crois:		Report errors?

ARX1212 Guarantees



Quality Guarantees

We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.

SERVICE BUARANTEE

Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.



If you have any question about ARX1212, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com