


ASVTX-12-A-16.369MHZ-I15-T Information



Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.

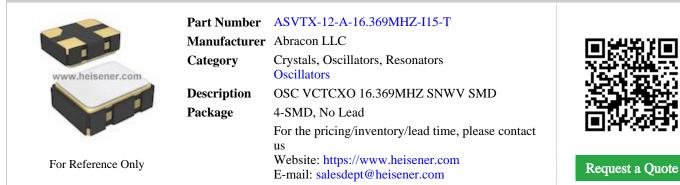

ASVTX-12-A-16.369MHZ-I15-T Specifications

| Manufacturer Part NumberASVTX-12-A-16.369MHZ-115-TManufacturer Part NumberAbracon LLCCategoryCrystals, Oscillators, ResonatorsOscillatorsOscillatorsPackage4-SMD, No LeadSeriesASVTX-12TypeVCTCXOFrequency16.369MHZOutputClipped Sine WaveVoltage - SupplySVFrequency Stability±1.5ppmOperating Temperature-0°C ~ 85°CCurret - Supply (Max)2mA |
|--|
| CategoryCrystals, Oscillators, ResonatorsOscillatorsPackage4-SMD, No LeadPackageASVTX-12SeriesASVTX-12TypeVCTCXOFrequency16.369MHzPanction-OutputClipped Sine WaveVoltage - Supply3VFrequency Stability±1.5ppmOperating Temperature-40°C ~ 85°CCurrent - Supply (Max)2mA |
| OscillatorsPackage4-SMD, No LeadSeriesASVTX-12TypeVCTCXOFrequency16.369MHzFunction-OutputClipped Sine WaveVoltage - Supply3VFrequency Stability±1.5ppmOperating Temperature-40°C ~ 85°CCurrent - Supply (Max)2mA |
| Package4-SMD, No LeadSeriesASVTX-12TypeVCTCXOFrequency16.369MHzFunction-OutputClipped Sine WaveVoltage - Supply3VFrequency Stability±1.5ppmOperating Temperature-40°C ~ 85°CSurrent - Supply (Max)2mA |
| SeriesASVTX-12SpeVCTCXOFrequency16.369MHzFunction-OutputClipped Sine WaveVoltage - Supply3VFrequency Stability±1.5ppmOperating Temperature-40°C ~ 85°CCurrent - Supply (Max)2mA |
| TypeVCTCXOFrequency16.369MHzFunction-OutputClipped Sine WaveVoltage - Supply3VFrequency Stability±1.5ppmOperating Temperature-40°C ~ 85°CCurrent - Supply (Max)2mA |
| Frequency16.369MHzFunction-OutputClipped Sine WaveVoltage - Supply3VFrequency Stability±1.5ppmOperating Temperature-40°C ~ 85°CCurrent - Supply (Max)2mA |
| Function-OutputClipped Sine WaveVoltage - Supply3VFrequency Stability±1.5ppmOperating Temperature-40°C ~ 85°CCurrent - Supply (Max)2mA |
| DutputClipped Sine WaveVoltage - Supply3VFrequency Stability±1.5ppmOperating Temperature-40°C ~ 85°CCurrent - Supply (Max)2mA |
| Voltage - Supply3VFrequency Stability±1.5ppmOperating Temperature-40°C ~ 85°CCurrent - Supply (Max)2mA |
| Frequency Stability±1.5ppmOperating Temperature-40°C ~ 85°CCurrent - Supply (Max)2mA |
| Operating Temperature-40°C ~ 85°CCurrent - Supply (Max)2mA |
| Current - Supply (Max) 2mA |
| |
| |
| Ratings - |
| Mounting Type Surface Mount |
| Package / Case 4-SMD, No Lead |
| Size / Dimension 0.098" L x 0.079" W (2.50mm x 2.00mm) |
| Height - Seated (Max) 0.035" (0.90mm) |
| Report errors? |

ASVTX-12-A-16.369MHZ-I15-T Guarantees



Quality Guarantees

We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.



If you have any question about ASVTX-12-A-16.369MHZ-115-T, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com