

B32521E6104J289

B32521E6104J289 Information





Request a Quote

For Reference Only

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



B32521E6104J289 Specifications

ManufacturerEPCOS (TDK)CategoryCapacitorsFilm CapacitorsFilm CapacitorsPackageRadialSeriesB32521Capacitance0.1µFTolerance±5%Voltage Rating - AC200VVoltage Rating - DC400VDielectric MaterialPolyester, Polyethylene Terephthalate (PET), Metallized - StackedSeries Resistance)-Operating Temperature-55°C ~ 125°CVoltage / CaseRadialSize / Dimension0.512" L x 0.197" W (13.00mm x 5.00mm)Height - Seated (Max)0.433" (11.00mm)TerminationPC PinsLead Spacing.304" (10.00mm)ApplicationsAutomotive; EMI, RFI SuppressionFeatures.			
CategoryCapacitorsFilm CapacitorsPackageRadialSeriesB32521Capacitance0.1µFTolerance±5%Voltage Rating - AC200VVoltage Rating - DC400VDielectric MaterialPolyester, Polyethylene Terephthalate (PET), Metallized - StackedSeries Resistance)-Operating Temperature-55°C ~ 125°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension0.512° L x 0.197° W (13.00mm x 5.00mm)Height - Seated (Max)0.394" (10.00mm)ApplicationsAutomotive; EMI, RFI SuppressionFeatures-	Manufacturer Part Number	B32521E6104J289	
Film CapacitorsPackageRadialSeriesB32521Capacitance0.1µFTolerance±5%Voltage Rating - AC200VVoltage Rating - DC400VDielectric MaterialPolyester, Polyethylene Terephthalate (PET), Metallized - StackedESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 125°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension0.512" L x 0.197" W (13.00mm x 5.00mm)Height - Seated (Max)0.394" (10.00mm)ApplicationsAutomotive; EMI, RFI SuppressionFeatures-	Manufacturer	EPCOS (TDK)	
PackageRadialSeriesB3251Capacitance0.1µFTolerance±5%Voltage Rating - AC200VVoltage Rating - DC400VDielectric MaterialPolyester, Polyethylene Terephthalate (PET), Metallized - StackedESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 125°CMounting TypeRadialPackage / CaseRadialSize / Dimension0.512° L x 0.197° W (13.00mm x 5.00mm)Height - Seated (Max)0.433° (11.00mm)Lead Spacing0.394" (10.00mm)ApplicationsAutomotive; EMI, RFI SuppressionFeatures-	Category	Capacitors	
Series B32521 Capacitance 0.1µF Tolerance ±5% Voltage Rating - AC 200V Voltage Rating - DC 400V Dielectric Material Polyester, Polyethylene Terephthalate (PET), Metallized - Stacked ESR (Equivalent Series Resistance) - Operating Temperature -55°C ~ 125°C Mounting Type Through Hole Package / Case Radial Size / Dimension 0.433" (11.00mm) x 5.00mm) Height - Seated (Max) 0.433" (11.00mm) Lead Spacing 0.394" (10.00mm) Applications Automotive; EMI, RFI Suppression Features -		Film Capacitors	
Capacitance0.1µFTolerance±5%Voltage Rating - AC200VVoltage Rating - DC400VDielectric MaterialPolyester, Polyethylene Terephthalate (PET), Metallized - StackedESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 125°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension0.512" L x 0.197" W (13.00mm x 5.00mm)Height - Seated (Max)0.433" (11.00mm)TerminationPC PinsLead Spacing0.394" (10.00mm)ApplicationsAutomotive; EMI, RFI SuppressionFeatures-	Package	Radial	
Tolerance±5%Voltage Rating - AC200VVoltage Rating - DC400VDielectric MaterialPolyester, Polyethylene Terephthalate (PET), Metallized - StackedESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 125°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension0.512" L x 0.197" W (13.00mm x 5.00mm)Height - Seated (Max)0.433" (11.00mm)TerminationPC PinsLead Spacing0.394" (10.00mm)ApplicationsAutomotive; EMI, RFI SuppressionFeatures-	Series	B32521	
Voltage Rating - AC200VVoltage Rating - DC400VDielectric MaterialPolyester, Polyethylene Terephthalate (PET), Metallized - StackedESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 125°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension0.512" L x 0.197" W (13.00mm x 5.00mm)Height - Seated (Max)0.433" (11.00mm)TerminationPC PinsLead Spacing0.394" (10.00mm)ApplicationsAutomotive; EMI, RFI SuppressionFeatures-	Capacitance	0.1µF	
Voltage Rating - DC400VDielectric MaterialPolyester, Polyethylene Terephthalate (PET), Metallized - StackedESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 125°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension0.512" L x 0.197" W (13.00mm x 5.00mm)Height - Seated (Max)0.433" (11.00mm)TerminationPC PinsLead Spacing0.394" (10.00mm)ApplicationsAutomotive; EMI, RFI SuppressionFeatures-	Tolerance	±5%	
Dielectric MaterialPolyester, Polyethylene Terephthalate (PET), Metallized - StackedESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 125°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension0.512" L x 0.197" W (13.00mm x 5.00mm)Height - Seated (Max)0.433" (11.00mm)TerminationPC PinsLead Spacing0.394" (10.00mm)ApplicationsAutomotive; EMI, RFI SuppressionFeatures-	Voltage Rating - AC	200V	
ESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 125°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension0.512" L x 0.197" W (13.00mm x 5.00mm)Height - Seated (Max)0.433" (11.00mm)TerminationPC PinsLead Spacing0.394" (10.00mm)ApplicationsAutomotive; EMI, RFI SuppressionFeatures-	Voltage Rating - DC	400V	
Operating Temperature-55°C ~ 125°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension0.512" L x 0.197" W (13.00mm x 5.00mm)Height - Seated (Max)0.433" (11.00mm)TerminationPC PinsLead Spacing0.394" (10.00mm)ApplicationsAutomotive; EMI, RFI SuppressionFeatures-	Dielectric Material	Polyester, Polyethylene Terephthalate (PET), Metallized - Stacked	
Nounting TypeThrough HolePackage / CaseRadialSize / Dimension0.512" L x 0.197" W (13.00mm x 5.00mm)Height - Seated (Max)0.433" (11.00mm)TerminationPC PinsLead Spacing0.394" (10.00mm)ApplicationsAutomotive; EMI, RFI SuppressionFeatures-	ESR (Equivalent Series Resistance)	-	
Package / CaseRadialSize / Dimension0.512" L x 0.197" W (13.00mm x 5.00mm)Height - Seated (Max)0.433" (11.00mm)TerminationPC PinsLead Spacing0.394" (10.00mm)ApplicationsAutomotive; EMI, RFI SuppressionFeatures-	Operating Temperature	-55°C ~ 125°C	
Size / Dimension0.512" L x 0.197" W (13.00mm x 5.00mm)Height - Seated (Max)0.433" (11.00mm)TerminationPC PinsLead Spacing0.394" (10.00mm)ApplicationsAutomotive; EMI, RFI SuppressionFeatures-	Mounting Type	Through Hole	
Height - Seated (Max)0.433" (11.00mm)TerminationPC PinsLead Spacing0.394" (10.00mm)ApplicationsAutomotive; EMI, RFI SuppressionFeatures-	Package / Case	Radial	
TerminationPC PinsLead Spacing0.394" (10.00mm)ApplicationsAutomotive; EMI, RFI SuppressionFeatures-	Size / Dimension	0.512" L x 0.197" W (13.00mm x 5.00mm)	
Lead Spacing0.394" (10.00mm)ApplicationsAutomotive; EMI, RFI SuppressionFeatures-	Height - Seated (Max)	0.433" (11.00mm)	
Applications Automotive; EMI, RFI Suppression Features -	Termination	PC Pins	
Features -	Lead Spacing	0.394" (10.00mm)	
	Applications	Automotive; EMI, RFI Suppression	
Report errors?	Features	-	
			Report errors?

E-mail: salesdept@heisener.com

B32521E6104J289 Guarantees



Quality Guarantees


We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

B32521E6104J289 Payment Methods

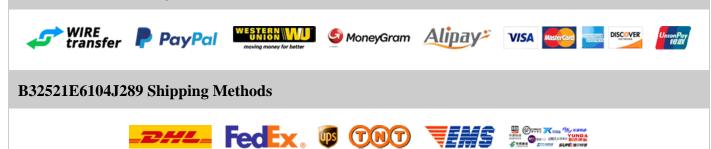

If you have any question about B32521E6104J289, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com