


B32529C0474M289

B32529C0474M289 Information

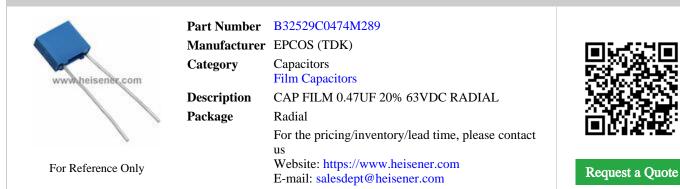

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



B32529C0474M289 Specifications

Manufacturer EPCOS (TDK) Capacitors Film Capacitors Package Radial Series B32529 Capacitance 0.47µF Tolerance ±20% Voltage Rating - AC 40V Voltage Rating - DC 63V Dielectric Material Polyestr, Polyethylene Terephthalate (PET), Metallized - Stacked Stress Resistance) - Operating Temperature - Voltage / Case Radial Size / Dimension 0.287" L x 0.138" W (7.30mm x 3.50mm) Height - Seated (Max) 0.315" (8.00mm) Termination PC Pins Lad Spacing 0.197" (5.00mm) Applications - Features -			
CategoryCapacitorsFilm CapacitorsPackageRadialSeriesB32529Capacitance0.47µFTolerance±20%Voltage Rating - AC40VVoltage Rating - DC63VDielectric MaterialPolyester, Polyethylene Terephthalate (PET), Metallized - StackedESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 125°CMounting TypeRadialSize / Dimension0.287" L x 0.138" W (7.30mm x 3.50mm)Height - Seated (Max)0.315" (8.00mm)TerminationPC PinsLead Spacing0.197" (5.00mm)ApplicationsAutomotive; EMI, RFI SuppressionFeatures-	Manufacturer Part Number	B32529C0474M289	
Film CapacitorsPackageRadialSeriesB32529Capacitance0.47μFTolerance±20%Voltage Rating - AC40VVoltage Rating - DC63VDielectric MaterialPolyester, Polyethylene Terephthalate (PET), Metallized - StackedESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 125°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension0.287" L x 0.138" W (7.30mm x 3.50mm)Height - Seated (Max)0.315" (8.00mm)TerminationPC PinsLead Spacing0.197" (5.00mm)ApplicationsAutomotive; EMI, RFI SuppressionFeatures-	Manufacturer	EPCOS (TDK)	
PackageRadialSeriesB32529Capacitance0.47μFTolerance±20%Voltage Rating - AC40VVoltage Rating - DC63VDielectric MaterialPolyester, Polyethylene Terephthalate (PET), Metallized - StackedESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 125°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension0.287" L x 0.138" W (7.30mm x 3.50mm)Height - Seated (Max)0.315" (8.00mm)TerminationPC PinsLead Spacing0.197" (5.00mm)ApplicationsAutomotive; EMI, RFI SuppressionFeatures-	Category	Capacitors	
SeriesB32529Capacitance0.47µFTolerance±20%Voltage Rating - AC40VVoltage Rating - DC63VDielectric MaterialPolyester, Polyethylene Terephthalate (PET), Metallized - StackedESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 125°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension0.287" L x 0.138" W (7.30mm x 3.50mm)Height - Seated (Max)0.315" (8.00mm)TerminationPC PinsLead Spacing0.197" (5.00mm)ApplicationsAutomotive; EMI, RFI SuppressionFeatures-		Film Capacitors	
Capacitance0.47µFTolerance±20%Voltage Rating - AC40VVoltage Rating - DC63VDielectric MaterialPolyester, Polyethylene Terephthalate (PET), Metallized - StackedESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 125°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension0.287" L x 0.138" W (7.30mm x 3.50mm)Height - Seated (Max)0.315" (8.00mm)TerminationPC PinsLead Spacing0.197" (5.00mm)ApplicationsAutomotive; EMI, RFI SuppressionFeatures-	Package	Radial	
Tolerance±20%Voltage Rating - AC40VVoltage Rating - DC63VDielectric MaterialPolyester, Polyethylene Terephthalate (PET), Metallized - StackedESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 125°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension0.287" L x 0.138" W (7.30mm x 3.50mm)Height - Seated (Max)0.315" (8.00mm)TerminationPC PinsLead Spacing0.197" (5.00mm)Applications-Features-	Series	B32529	
Voltage Rating - AC40VVoltage Rating - DC63VDielectric MaterialPolyester, Polyethylene Terephthalate (PET), Metallized - StackedESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 125°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension0.287" L x 0.138" W (7.30mm x 3.50mm)Height - Seated (Max)0.315" (8.00mm)TerminationPC PinsLead Spacing0.197" (5.00mm)ApplicationsAutomotive; EMI, RFI SuppressionFeatures-	Capacitance	0.47µF	
Voltage Rating - DC63VDielectric MaterialPolyester, Polyethylene Terephthalate (PET), Metallized - StackedESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 125°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension0.287" L x 0.138" W (7.30mm x 3.50mm)Height - Seated (Max)0.315" (8.00mm)TerminationPC PinsLead Spacing0.197" (5.00mm)ApplicationsAutomotive; EMI, RFI SuppressionFeatures-	Tolerance	±20%	
Dielectric MaterialPolyester, Polyethylene Terephthalate (PET), Metallized - StackedESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 125°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension0.287" L x 0.138" W (7.30mm x 3.50mm)Height - Seated (Max)0.315" (8.00mm)TerminationPC PinsLead Spacing0.197" (5.00mm)ApplicationsAutomotive; EMI, RFI SuppressionFeatures-	Voltage Rating - AC	40V	
ESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 125°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension0.287" L x 0.138" W (7.30mm x 3.50mm)Height - Seated (Max)0.315" (8.00mm)TerminationPC PinsLead Spacing0.197" (5.00mm)ApplicationsAutomotive; EMI, RFI SuppressionFeatures-	Voltage Rating - DC	63V	
Operating Temperature-55°C ~ 125°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension0.287" L x 0.138" W (7.30mm x 3.50mm)Height - Seated (Max)0.315" (8.00mm)TerminationPC PinsLead Spacing0.197" (5.00mm)ApplicationsAutomotive; EMI, RFI SuppressionFeatures-	Dielectric Material	Polyester, Polyethylene Terephthalate (PET), Metallized - Stacked	
Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.287" L x 0.138" W (7.30mm x 3.50mm)Height - Seated (Max)0.315" (8.00mm)TerminationPC PinsLead Spacing0.197" (5.00mm)ApplicationsAutomotive; EMI, RFI SuppressionFeatures-	ESR (Equivalent Series Resistance)	-	
Package / CaseRadialSize / Dimension0.287" L x 0.138" W (7.30mm x 3.50mm)Height - Seated (Max)0.315" (8.00mm)TerminationPC PinsLead Spacing0.197" (5.00mm)ApplicationsAutomotive; EMI, RFI SuppressionFeatures-	Operating Temperature	-55°C ~ 125°C	
Size / Dimension0.287" L x 0.138" W (7.30mm x 3.50mm)Height - Seated (Max)0.315" (8.00mm)TerminationPC PinsLead Spacing0.197" (5.00mm)ApplicationsAutomotive; EMI, RFI SuppressionFeatures-	Mounting Type	Through Hole	
Height - Seated (Max)0.315" (8.00mm)TerminationPC PinsLead Spacing0.197" (5.00mm)ApplicationsAutomotive; EMI, RFI SuppressionFeatures-	Package / Case	Radial	
TerminationPC PinsLead Spacing0.197" (5.00mm)ApplicationsAutomotive; EMI, RFI SuppressionFeatures-	Size / Dimension	0.287" L x 0.138" W (7.30mm x 3.50mm)	
Lead Spacing0.197" (5.00mm)ApplicationsAutomotive; EMI, RFI SuppressionFeatures-	Height - Seated (Max)	0.315" (8.00mm)	
ApplicationsAutomotive; EMI, RFI SuppressionFeatures-	Termination	PC Pins	
Features -	Lead Spacing	0.197" (5.00mm)	
	Applications	Automotive; EMI, RFI Suppression	
Report errors?	Features	-	
			Report errors?

B32529C0474M289 Guarantees



Quality Guarantees

We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

B32529C0474M289 Payment Methods



B32529C0474M289 Shipping Methods



If you have any question about B32529C0474M289, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com