

B41858D5187M8

Request a Quote

B41858D5187M8 Information

Heisener.com	Part Number	B41858D5187M8
	Manufacturer	EPCOS (TDK)
	Category	Capacitors Aluminum Electrolytic Capacitors
	Description	CAP ALUM 180UF 20% 25V RADIAL
	Package	Radial, Can
		For the pricing/inventory/lead time, please contact
For Reference Only		us
		Website: https://www.heisener.com
		E-mail: salesdept@heisener.com

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



B41858D5187M8 Specifications

ManufacturerEPCOS (TDK)CapacitorsCapacitorsAtuminum Electrolytic CapacitorsPackageRadial, CanSeriesB41858Capacitance180µFTolerance±20%Voltage - Rated25VESR (Equivalent Series Resistance)274 mOhm @ 10kHzDeparting Temperature.55°C ~ 105°CPolarizationPolarApplicationsAutomotiveRipple Current - High Frequency.400mtiveRipple Current - High Frequency0.197" (5.00mm)Size / Dimension0.315" Dia (8.00mm)Size / Dimension.512" (13.00mm)Surface Mount Land Size.Mounting TypeThrough Hole		
CapacitorsCapacitorsAluminum Electrolytic CapacitorsPackageRadial, CanPackageB41858Capacitance180µFTolerance±20%Voltage - Rated25VESR (Equivalent Series Resistance)274 mOhm @ 10kHzLifetime @ Temp.3000 Hrs @ 105°COperating Temperature-55°C ~ 105°CPolarizationPolarApplicationsAutomotiveRipple Current - Low Frequency-Ripple Current - High Frequency436mA @ 100kHzImpedance246 mOhmsLead Spacing0.197" (5.00mm)Size / Dimension0.315" Dia (8.00mm)Height - Seated (Max)0.512" (13.00mm)Surface Mount Land Size-Mounting TypeThrough HolePackage / CaseRadial, Can	Manufacturer Part Number	B41858D5187M8
Aluminum Electrolytic CapacitorsPackageRadial, CanPackageB41858Capacitance180µFTolerance±20%Voltage - Rated55VESR (Equivalent Series Resistance)274 mOhm @ 10kHzDiperating Temperature3000 Hrs @ 105°COperating Temperature55°C ~ 105°CPolarizationAutomotiveRipple Current - Low Frequency436mA @ 100kHzRipple Current - High Frequency246 mOhmsLad Spacing0.197" (5.00mm)Size / Dimension0.512" (13.00mm)Size / Dimension5.5°C (13.00mm)Ripfa Curant Land Size-Ripfa Curant Land Size-Surface Mount Land Size-Package / CaseKadia, Can	Manufacturer	EPCOS (TDK)
PackageRadial, CanSeriesB41858Capacitance180µFTolerance±20%Voltage - Rated25VESR (Equivalent Series Resistance)274 mOhm @ 10kHzLifetime @ Temp.3000 Hrs @ 105°COperating Temperature-55°C ~ 105°CPolarizationPolarApplicationsAutomotiveRipple Current - Low Frequency-Ripple Current - High Frequency436mA @ 100kHzLead Spacing0.197" (5.00mm)Size / Dimension0.512" (13.00mm)Size / Dimension.512" (13.00mm)Surface Mount Land Size-Mounting TypeRadial, Can	Category	Capacitors
SerieB41858Capacitance180µFTolerance±20%Voltage - Rated25VESR (Equivalent Series Resistance)274 mOhm @ 10kHzLifetime @ Temp.3000 Hrs @ 105°COperating Temperature-55°C ~ 105°CPolarizationPolarApplicationsAutomotiveRipple Current - High Frequency436mA @ 100kHzLifedme @ Jacing0.197" (5.00mm)Size / Dimension0.315" Dia (8.00mm)Height - Seated (Max)0.512" (13.00mm)Surface Mount Land Size-Package / CaseRadial, Can		Aluminum Electrolytic Capacitors
Capacitance180µFTolerance±20%Voltage - Rated25VESR (Equivalent Series Resistance)274 mOhm @ 10kHzLifetime @ Temp.3000 Hrs @ 105°COperating Temperature-55°C ~ 105°CPolarizationPolarApplicationsAutomotiveRipple Current - Low Frequency-Kipple Current - High Frequency436mA @ 100kHzImpedance246 mOhmsIssize / Dimension0.315" Dia (8.00mm)Height - Seated (Max)0.512" (13.00mm)Surface Mount Land Size-Poackage / CaseKadial, Can	Package	Radial, Can
Polerance±0%Voltage - Rated25VESR (Equivalent Series Resistance)274 mOhm @ 10kHzLifetime @ Temp.3000 Hrs @ 105°COperating Temperature-55°C ~ 105°CPolarizationPolarApplicationsAutomotiveRipple Current - Low Frequency-Ripple Current - High Frequency436mA @ 100kHzImpedance0.197" (5.00mm)Lead Spacing0.197" (5.00mm)Size / Dimension0.512" (13.00mm)Height - Seated (Max)0.512" (13.00mm)Surface Mount Land Size-Package / CaseRadial, Can	Series	B41858
Voltage - Rated25VESR (Equivalent Series Resistance)274 mOhm @ 10kHzLifetime @ Temp.3000 Hrs @ 105°COperating Temperature-55°C ~ 105°CPolarizationPolarApplicationsAutomotiveRipple Current - Low Frequency-Ripple Current - High Frequency246 mOhmsLead Spacing0.197" (5.00mm)Size / Dimension0.512" (13.00mm)Height - Seated (Max)0.512" (13.00mm)Surface Mount Land Size-Package / CaseRadial, Can	Capacitance	180µF
ESR (Equivalent Series Resistance)274 mOhm @ 10kHzLifetime @ Temp.3000 Hrs @ 105°COperating Temperature-55°C ~ 105°CPolarizationPolarApplicationsAutomotiveRipple Current - Low Frequency-Ripple Current - High Frequency436mA @ 100kHzImpedance246 mOhmsLead Spacing0.197" (5.00mm)Size / Dimension0.315" Dia (8.00mm)Height - Seated (Max)0.512" (13.00mm)Surface Mount Land Size-Package / CaseRadial, Can	Tolerance	$\pm 20\%$
Lifetime @ Temp.3000 Hrs @ 105°COperating Temperature-55°C ~ 105°CPolarizationPolarApplicationsAutomotiveAipple Current - Low Frequency-Kipple Current - High Frequency436mA @ 100kHzImpedance246 mOhmsLead Spacing0.197" (5.00mm)Size / Dimension0.315" Dia (8.00mm)Height - Seated (Max)-Surface Mount Land Size-Mounting TypeThrough HolePackage / CaseRadial, Can	Voltage - Rated	25V
Operating Temperature-55°C ~ 105°CPolarizationPolarApplicationsAutomotiveRipple Current - Low Frequency-Ripple Current - High Frequency436mA @ 100kHzImpedance246 mOhmsLead Spacing0.197" (5.00mm)Size / Dimension0.315" Dia (8.00mm)Height - Seated (Max)0.512" (13.00mm)Surface Mount Land Size-Mounting TypeThrough HolePackage / CaseRadial, Can	ESR (Equivalent Series Resistance)	274 mOhm @ 10kHz
PolarizationPolarPolarizationAutomotiveApplications-Ripple Current - Low Frequency-Ripple Current - High Frequency436mA @ 100kHzImpedance246 mOhmsLead Spacing0.197" (5.00mm)Size / Dimension0.315" Dia (8.00mm)Height - Seated (Max)0.512" (13.00mm)Surface Mount Land Size-Mounting TypeThrough HolePackage / CaseRadial, Can	Lifetime @ Temp.	3000 Hrs @ 105°C
ApplicationsAutomotiveRipple Current - Low Frequency-Ripple Current - High Frequency436mA @ 100kHzImpedance246 mOhmsLead Spacing0.197" (5.00mm)Size / Dimension0.315" Dia (8.00mm)Height - Seated (Max)0.512" (13.00mm)Surface Mount Land Size-Mounting TypeThrough HolePackage / CaseRadial, Can	Operating Temperature	-55°C ~ 105°C
ITInterfaceRipple Current - Low Frequency-Ripple Current - High Frequency436mA @ 100kHzImpedance246 mOhmsLead Spacing0.197" (5.00mm)Size / Dimension0.315" Dia (8.00mm)Height - Seated (Max)0.512" (13.00mm)Surface Mount Land Size-Mounting TypeThrough HolePackage / CaseRadial, Can	Polarization	Polar
Ripple Current - High Frequency436mA @ 100kHzImpedance246 mOhmsLead Spacing0.197" (5.00mm)Size / Dimension0.315" Dia (8.00mm)Height - Seated (Max)0.512" (13.00mm)Surface Mount Land Size-Mounting TypeThrough HolePackage / CaseRadial, Can	Applications	Automotive
Impedance246 mOhmsLead Spacing0.197" (5.00mm)Size / Dimension0.315" Dia (8.00mm)Height - Seated (Max)0.512" (13.00mm)Surface Mount Land Size-Mounting TypeThrough HolePackage / CaseRadial, Can	Ripple Current - Low Frequency	-
Lead Spacing0.197" (5.00mm)Size / Dimension0.315" Dia (8.00mm)Height - Seated (Max)0.512" (13.00mm)Surface Mount Land Size-Mounting TypeThrough HolePackage / CaseRadial, Can	Ripple Current - High Frequency	436mA @ 100kHz
Size / Dimension0.315" Dia (8.00mm)Height - Seated (Max)0.512" (13.00mm)Surface Mount Land Size-Mounting TypeThrough HolePackage / CaseRadial, Can	Impedance	246 mOhms
Height - Seated (Max)0.512" (13.00mm)Surface Mount Land Size-Mounting TypeThrough HolePackage / CaseRadial, Can	Lead Spacing	0.197" (5.00mm)
Surface Mount Land Size-Mounting TypeThrough HolePackage / CaseRadial, Can	Size / Dimension	0.315" Dia (8.00mm)
Mounting TypeThrough HolePackage / CaseRadial, Can	Height - Seated (Max)	0.512" (13.00mm)
Package / Case Radial, Can	Surface Mount Land Size	-
	Mounting Type	Through Hole
Report errors?	Package / Case	Radial, Can
		Report errors?

B41858D5187M8 Guarantees



Quality Guarantees


We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.

SERVICE EUARANTEE

Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

B41858D5187M8 Payment Methods

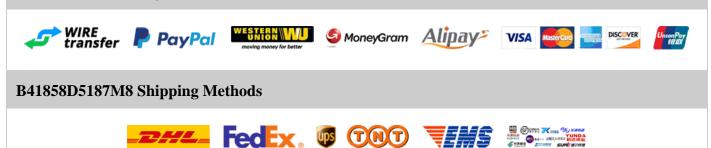

If you have any question about B41858D5187M8, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com