

# B43540F2567M87

#### B43540F2567M87 Information

Heisener.com Octariariose carlo terr	 B43540F2567M87 EPCOS (TDK) Capacitors Aluminum Electrolytic Capacitors CAP ALUM 560UF 20% 250V SNAP Radial, Can - Snap-In For the pricing/inventory/lead time, please contact	
For Reference Only	us Website: https://www.heisener.com E-mail: salesdept@heisener.com	Request a Quote

## **Certified Quality**

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



### B43540F2567M87 Specifications

Manufacturer EPCOS (TDK)   Category Capacitors   Aluminum Electrolytic Capacitors Aluminum Electrolytic Capacitors   Package Radial, Can - Snap-In   Series B43540   Capacitance 560µF   Tolerance ±20%   Voltage - Rated 250V   ESR (Equivalent Series Resistance) 120 mOhm @ 100Hz   Lifetime @ Temp. 10000 Hrs @ 85°C   Operating Temperature -40°C ~ 85°C   Polarization General Purpose   Ripple Current - Low Frequency 2.5A @ 100Hz   Ripple Current - High Frequency -   Impedance 0.394" (10.00mm)   Lied Spacing 3.94" (10.00mm)   Size / Dimension 1.81" Dia (30.00mm)   Height - Seated (Max) 1.268" (32.20mm)   Surface Mount Land Size -   Mounting Type Through Hole		
CapacitorsAluminum Electrolytic CapacitorsPackageRadial, Can - Snap-InSeriesB43540Capacitance560µFTolerance±20%Voltage - Rated250VESR (Equivalent Series Resistance)120 mOhm @ 100HzLifetime @ Temp.10000 Hrs @ 85°COperating Temperature-40°C ~ 85°CPolarizationPolarApplicationsGeneral PurposeRipple Current - Low Frequency-Impedance150 mOhmsLied Spacing0.394" (10.00mm)Size / Dimension1.181" Dia (30.00mm)Height - Seated (Max)1.268" (32.20mm)Surface Mount Land Size-Mounting TypeThrough HolePackage / CaseRadial, Can - Snap-In	Manufacturer Part Number	B43540F2567M87
Aluminum Electrolytic CapacitorsPackageRadial, Can - Snap-InSeriesB43540Capacitance560µFTolerance±20%Voltage - Rated250VESR (Equivalent Series Resistance)120 mOhm @ 100HzLifetime @ remp.00000 Hrs @ 85°COperating Temperature40°C ~ 85°CPolarizationGeneral PurposeRipple Current - Low Frequency.55A @ 100HzRipple Current - High Frequency.55A @ 100HzSiz / Dimension1.81° Dia (30.00mm)Siz / Dimension.181° Dia (30.00mm)Siz / Dimension.268° (32.20mm)Surface Mount Land Size.Package / CaseKadial, Can - Snap-In	Manufacturer	EPCOS (TDK)
PackageRadial, Can - Snap-InSeriesB43540Capacitance560µFTolerance±20%Voltage - Rated250VESR (Equivalent Series Resistance)120 mOhm @ 100HzLifetime @ Temp.10000 Hrs @ 85°COperating Temperature-40°C ~ 85°CPolarizationGeneral PurposeRipple Current - Low Frequency-Ripple Current - High Frequency-Size / Dimension1.181° Dia (30.00mm)Size / Dimension1.268° (32.20mm)Surface Mount Land Size-Mounting TypeAral Can - Snap-InPackage / CaseRadial, Can - Snap-In	Category	Capacitors
SeriesB43540Capacitance560μFTolerance±20%Voltage - Rated250VESR (Equivalent Series Resistance)120 mOhm @ 100HzLifetime @ Temp.10000 Hrs @ 85°COperating Temperature-40°C ~ 85°CPolarizationPolarApplicationsGeneral PurposeRipple Current - Low Frequency2.5A @ 100HzLifedance150 mOhmsLiad Spacing0.394" (10.00mm)Size / Dimension1.181" Dia (30.00mm)Height - Seated (Max)1.268" (32.20mm)Surface Mount Land Size-Package / CaseRadial, Can - Snap-In		Aluminum Electrolytic Capacitors
Capacitance560µFTolerance±20%Voltage - Rated250VESR (Equivalent Series Resistance)120 mOhm @ 100HzLifetime @ Temp.10000 Hrs @ 85°COperating Temperature-40°C ~ 85°CPolarizationPolarApplicationsGeneral PurposeRipple Current - Low Frequency-Inpedance150 mOhmsLied Spacing0.394" (10.00mm)Sisz / Dimension1.181" Dia (30.00mm)Height - Seated (Max)-Surface Mount Land Size-Package / CaseRadial, Can - Snap-In	Package	Radial, Can - Snap-In
Tolerance±20%Voltage - Rated250VESR (Equivalent Series Resistance)120 mOhm @ 100HzLifetime @ Temp.10000 Hrs @ 85°COperating Temperature-40°C ~ 85°CPolarizationPolarApplicationsGeneral PurposeRipple Current - Low Frequency2.5A @ 100HzImpedance150 mOhmsLiad Spacing0.394" (10.00mm)Size / Dimension1.181" Dia (30.00mm)Height - Seated (Max)1.268" (32.20mm)Surface Mount Land Size-Package / CaseRatial, Can - Snap-In	Series	B43540
Voltage - Rated250VESR (Equivalent Series Resistance)120 mOhm @ 100HzLifetime @ Temp.10000 Hrs @ 85°COperating Temperature-40°C ~ 85°CPolarizationPolarApplicationsGeneral PurposeRipple Current - Low Frequency2.5A @ 100HzImpedance150 mOhmsLead Spacing0.394" (10.00mm)Size / Dimension1.181" Dia (30.00mm)Height - Seated (Max)1.268" (32.20mm)Surface Mount Land Size-Package / CaseRadial, Can - Snap-In	Capacitance	560µF
Comparison120 mOhm @ 100HzESR (Equivalent Series Resistance)10000 Hrs @ 85°CLifetime @ Temp40°C ~ 85°COperating TemperaturePolarPolarizationGeneral PurposeApplicationsGeneral PurposeRipple Current - Low Frequency2.5A @ 100HzImpedance150 mOhmsLead Spacing0.394" (10.00mm)Size / Dimension1.181" Dia (30.00mm)Height - Seated (Max)1.268" (32.20mm)Surface Mount Land Size-Mounting TypeRadial, Can - Snap-In	Tolerance	±20%
Lifetime @ Temp.10000 Hrs @ 85°COperating Temperature-40°C ~ 85°CPolarizationPolarPolarizationsGeneral PurposeApplications2.5A @ 100HzRipple Current - Low Frequency-Impedance150 mOhmsLead Spacing0.394" (10.00mm)Size / Dimension1.181" Dia (30.00mm)Height - Seated (Max)-Surface Mount Land Size-Mounting TypeThrough HolePackage / CaseRadial, Can - Snap-In	Voltage - Rated	250V
Operating Temperature-40°C ~ 85°CPolarizationPolarApplicationsGeneral PurposeRipple Current - Low Frequency2.5A @ 100HzRipple Current - High Frequency-Impedance150 mOhmsLead Spacing0.394" (10.00mm)Size / Dimension1.181" Dia (30.00mm)Height - Seated (Max)-Surface Mount Land Size-Mounting TypeThrough HolePackage / CaseRadial, Can - Snap-In	ESR (Equivalent Series Resistance)	120 mOhm @ 100Hz
PolarizationPolarPolarizationPolarApplicationsGeneral PurposeRipple Current - Low Frequency2.5A @ 100HzRipple Current - High Frequency-Impedance150 mOhmsLead Spacing0.394" (10.00mm)Size / Dimension1.181" Dia (30.00mm)Height - Seated (Max)1.268" (32.20mm)Surface Mount Land Size-Mounting TypeThrough HolePackage / CaseRadial, Can - Snap-In	Lifetime @ Temp.	10000 Hrs @ 85°C
ApplicationsGeneral PurposeRipple Current - Low Frequency2.5A @ 100HzRipple Current - High Frequency-Impedance150 mOhmsLead Spacing0.394" (10.00mm)Size / Dimension1.181" Dia (30.00mm)Height - Seated (Max)1.268" (32.20mm)Surface Mount Land Size-Mounting TypeThrough HolePackage / CaseRadial, Can - Snap-In	Operating Temperature	-40°C ~ 85°C
Ripple Current - Low Frequency2.5A @ 100HzRipple Current - High Frequency-Impedance150 mOhmsLead Spacing0.394" (10.00mm)Size / Dimension1.181" Dia (30.00mm)Height - Seated (Max)1.268" (32.20mm)Surface Mount Land Size-Mounting TypeThrough HolePackage / CaseRadial, Can - Snap-In	Polarization	Polar
In a constraint of a constrain	Applications	General Purpose
Impedance150 mOhmsLead Spacing0.394" (10.00mm)Size / Dimension1.181" Dia (30.00mm)Height - Seated (Max)1.268" (32.20mm)Surface Mount Land Size-Mounting TypeThrough HolePackage / CaseRadial, Can - Snap-In	Ripple Current - Low Frequency	2.5A @ 100Hz
Lead Spacing0.394" (10.00mm)Size / Dimension1.181" Dia (30.00mm)Height - Seated (Max)1.268" (32.20mm)Surface Mount Land Size-Mounting TypeThrough HolePackage / CaseRadial, Can - Snap-In	Ripple Current - High Frequency	-
Size / Dimension1.181" Dia (30.00mm)Height - Seated (Max)1.268" (32.20mm)Surface Mount Land Size-Mounting TypeThrough HolePackage / CaseRadial, Can - Snap-In	Impedance	150 mOhms
Height - Seated (Max)1.268" (32.20mm)Surface Mount Land Size-Mounting TypeThrough HolePackage / CaseRadial, Can - Snap-In	Lead Spacing	0.394" (10.00mm)
Surface Mount Land Size-Mounting TypeThrough HolePackage / CaseRadial, Can - Snap-In	Size / Dimension	1.181" Dia (30.00mm)
Mounting TypeThrough HolePackage / CaseRadial, Can - Snap-In	Height - Seated (Max)	1.268" (32.20mm)
Package / Case Radial, Can - Snap-In	Surface Mount Land Size	-
	Mounting Type	Through Hole
Report errors?	Package / Case	Radial, Can - Snap-In
		Report errors?

#### B43540F2567M87 Guarantees



Quality Guarantees


We provide 90 days warranty. \* If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.

# SERVICE BUARANTEE

#### **Service Guarantees**

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

#### B43540F2567M87 Payment Methods

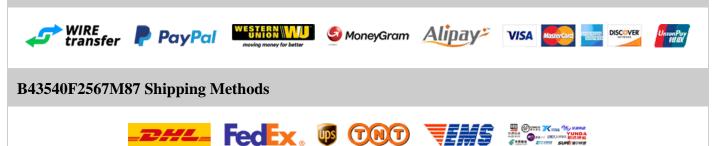

If you have any question about B43540F2567M87, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com