

B43601A5567M87

B43601A5567M87 Information

Heisener.com	 B43601A5567M87 EPCOS (TDK) Capacitors Aluminum Electrolytic Capacitors CAP ALUM 560UF 20% 450V SNAP Radial, Can - Snap-In For the pricing/inventory/lead time, please contact	
For Reference Only	us Website: https://www.heisener.com E-mail: salesdept@heisener.com	Request a Quote

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



B43601A5567M87 Specifications

Manufacturer EPCOS (TDK) Category Capacitors Aluminum Electrolytic Capacitors Radial, Can - Snap-In Package Radial, Can - Snap-In Series B43601 Capacitance 560µF Tolerance ±20% Voltage - Rated 450V ESR (Equivalent Series Resistance) 190 mOhm @ 100Hz Lifetime @ Temp. 10000 Hrs @ 85°C Operating Temperature -40°C ~ 85°C Polarization Polar Applications General Purpose Ripple Current - Low Frequency - Impedance 280 mOhms Lead Spacing 0.394" (10.00mm) Size / Dimension 1.181" Dia (30.00mm) Height - Seated (Max) 2.252" (57.20mm) Surface Mount Land Size - Mounting Type Through Hole Package / Case Kadial, Can - Snap-In	-	
CategoryCapacitorsAluminum Electrolytic CapacitorsPackageRadial, Can - Snap-InSeriesB43601Capacitance560µFTolerance±20%Voltage - Rated450VESR (Equivalent Series Resistance)190 mOhm @ 100HzLifetime @ Temp.10000 Hrs @ 85°COperating Temperature-40°C ~ 85°CPolarizationGeneral PurposeApplicationsGeneral PurposeRipple Current - Low Frequency-Impedance280 mOhmsLied Spacing0.394" (10.00mm)Size / Dimension1.181" Dia (30.00mm)Height - Seated (Max)2.252" (57.20mm)Surface Mount Land Size-Mounting TypeThrough HolePackage / CaseRadial, Can - Snap-In	Manufacturer Part Number	B43601A5567M87
Aluminum Electrolytic CapacitorsPackageRadial, Can - Snap-InSeriesB43601Capacitance560µFTolerance-20%Voltage - Rated450VESR (Equivalent Series Resistance)190 mOhm @ 100HzLifetime @ Temp.0000 Hrs @ 85°COperating Temperature-40°C ~ 85°CPolarizationGeneral PurposeApplicationsS01A @ 100HzRipple Current - High Frequency-Impedance280 mOhmsLided spacing0.394" (10.0mm)Siz / Dimension1.181" Dia (30.0mm)Height - Seated (Max)2.252" (57.20mm)Surface Mount Land Size-Package / CaseKadial, Can - Snap-In	Manufacturer	EPCOS (TDK)
PackageRadial, Can - Snap-InSeriesB43601Capacitance560µFTolerance±20%Voltage - Rated450VESR (Equivalent Series Resistance)190 mOhm @ 100HzLifetime @ Temp.100000 Hrs @ 85°COperating Temperature-40°C ~ 85°CPolarizationGeneral PurposeRiple Current - Low Frequency-Riple Current - High Frequency-Impedance280 mOhmsLad Spacing0.394" (10.00mm)Size / Dimension1.181" Dia (30.00mm)Height - Seated (Max)2.252" (57.20mm)Surface Mount Land Size-Package / CaseRadial, Can - Snap-In	Category	Capacitors
SeriesB43601Capacitance560µFTolerance±20%Voltage - Rated450VESR (Equivalent Series Resistance)190 mOhm @ 100HzLifetime @ Temp.10000 Hrs @ 85°COperating Temperature-40°C ~ 85°CPolarizationGeneral PurposeApplicationsGeneral PurposeRipple Current - Low Frequency3.01A @ 100HzLied Spacing0.394" (10.00mm)Size / Dimension1.181" Dia (30.00mm)Height - Seated (Max)2.252" (57.20mm)Surface Mount Land Size-Mounting TypeThrough HolePackage / CaseKadial, Can - Snap-In		Aluminum Electrolytic Capacitors
Capacitance560µFTolerance±20%Voltage - Rated450VESR (Equivalent Series Resistance)190 mohm @ 100HzLifetime @ Temp.10000 Hrs @ 85°COperating Temperature-40°C ~ 85°CPolarizationPolarApplicationsGeneral PurposeRipple Current - Low Frequency3.01A @ 100HzLinedance280 mOhmsLead Spacing0.394" (10.00mm)Size / Dimension1.181" Dia (30.00mm)Height - Seated (Max)2.252" (57.20mm)Surface Mount Land Size-Mounting TypeThrough HolePackage / CaseRadial, Can - Snap-In	Package	Radial, Can - Snap-In
Tolerance±20%Voltage - Rated450VESR (Equivalent Series Resistance)190 mOhm @ 100HzLifetime @ Temp.10000 Hrs @ 85°COperating Temperature-40°C ~ 85°CPolarizationPolarApplicationsGeneral PurposeRipple Current - Low Frequency3.01A @ 100HzImpedance280 mOhmsLead Spacing0.394" (10.00mm)Size / Dimension1.181" Dia (30.00mm)Height - Seated (Max)2.252" (57.20mm)Surface Mount Land Size-Pokage / CaseRadial, Can - Snap-In	Series	B43601
Voltage - Rated450VESR (Equivalent Series Resistance)190 mOhm @ 100HzLifetime @ Temp.10000 Hrs @ 85°COperating Temperature-40°C ~ 85°CPolarizationPolarApplicationsGeneral PurposeRipple Current - Low Frequency3.01A @ 100HzLiad Spacing-Impedance280 mOhmsLead Spacing0.394" (10.00mm)Size / Dimension1.181" Dia (30.00mm)Height - Seated (Max)2.522" (57.20mm)Surface Mount Land Size-Mounting TypeFacial Can - Snap-In	Capacitance	560µF
Constraint190 mOhm @ 100HzLifetime @ Temp.10000 Hrs @ 85°COperating Temperature-40°C ~ 85°CPolarizationPolarApplicationsGeneral PurposeRipple Current - Low Frequency3.01 A @ 100HzBipple Current - High Frequency-Impedance280 mOhmsLead Spacing0.394" (10.00mm)Size / Dimension1.181" Dia (30.00mm)Height - Seated (Max)2.252" (57.20mm)Surface Mount Land Size-Mounting TypeThrough HolePackage / CaseRadial, Can - Snap-In	Tolerance	±20%
Lifetime @ Temp.10000 Hrs @ 85°COperating Temperature-40°C ~ 85°CPolarizationPolarApplicationsGeneral PurposeRipple Current - Low Frequency3.01A @ 100HzRipple Current - High Frequency-Impedance280 mOhmsLead Spacing0.394" (10.00mm)Size / Dimension1.181" Dia (30.00mm)Height - Seated (Max)2.252" (57.20mm)Surface Mount Land Size-Mounting TypeFhrough HolePackage / CaseRadial, Can - Snap-In	Voltage - Rated	450V
Operating Temperature-40°C ~ 85°CPolarizationPolarApplicationsGeneral PurposeRipple Current - Low Frequency3.01A @ 100HzRipple Current - High Frequency-Impedance280 mOhmsLead Spacing0.394" (10.00mm)Size / Dimension1.181" Dia (30.00mm)Height - Seated (Max)2.252" (57.20mm)Surface Mount Land Size-Mounting TypeThrough HolePackage / CaseRadial, Can - Snap-In	ESR (Equivalent Series Resistance)	190 mOhm @ 100Hz
PolarizationPolarPolarizationPolarApplicationsGeneral PurposeRipple Current - Low Frequency3.01A @ 100HzRipple Current - High Frequency-Impedance280 mOhmsLead Spacing0.394" (10.00mm)Size / Dimension1.181" Dia (30.00mm)Height - Seated (Max)2.252" (57.20mm)Surface Mount Land Size-Mounting TypeThrough HolePackage / CaseRadial, Can - Snap-In	Lifetime @ Temp.	10000 Hrs @ 85°C
ApplicationsGeneral PurposeRipple Current - Low Frequency3.01A @ 100HzRipple Current - High Frequency-Impedance280 mOhmsLead Spacing0.394" (10.00mm)Size / Dimension1.181" Dia (30.00mm)Height - Seated (Max)2.252" (57.20mm)Surface Mount Land Size-Mounting TypeThrough HolePackage / CaseRadial, Can - Snap-In	Operating Temperature	-40° C ~ 85° C
Ripple Current - Low Frequency3.01A @ 100HzRipple Current - High Frequency-Impedance280 mOhmsLead Spacing0.394" (10.00mm)Size / Dimension1.181" Dia (30.00mm)Height - Seated (Max)2.252" (57.20mm)Surface Mount Land Size-Mounting TypeThrough HolePackage / CaseRadial, Can - Snap-In	Polarization	Polar
In a constraint of the product of t	Applications	General Purpose
Impedance280 mOhmsLead Spacing0.394" (10.00mm)Size / Dimension1.181" Dia (30.00mm)Height - Seated (Max)2.252" (57.20mm)Surface Mount Land Size-Mounting TypeThrough HolePackage / CaseRadial, Can - Snap-In	Ripple Current - Low Frequency	3.01A @ 100Hz
IILead Spacing0.394" (10.00mm)Size / Dimension1.181" Dia (30.00mm)Height - Seated (Max)2.252" (57.20mm)Surface Mount Land Size-Mounting TypeThrough HolePackage / CaseRadial, Can - Snap-In	Ripple Current - High Frequency	-
Size / Dimension1.181" Dia (30.00mm)Height - Seated (Max)2.252" (57.20mm)Surface Mount Land Size-Mounting TypeThrough HolePackage / CaseRadial, Can - Snap-In	Impedance	280 mOhms
Height - Seated (Max)2.252" (57.20mm)Surface Mount Land Size-Mounting TypeThrough HolePackage / CaseRadial, Can - Snap-In	Lead Spacing	0.394" (10.00mm)
Surface Mount Land Size-Mounting TypeThrough HolePackage / CaseRadial, Can - Snap-In	Size / Dimension	1.181" Dia (30.00mm)
Mounting TypeThrough HolePackage / CaseRadial, Can - Snap-In	Height - Seated (Max)	2.252" (57.20mm)
Package / Case Radial, Can - Snap-In	Surface Mount Land Size	-
	Mounting Type	Through Hole
Report errors?	Package / Case	Radial, Can - Snap-In
		Report errors?

B43601A5567M87 Guarantees



Quality Guarantees


We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.

SERVICE BUARANTEE

Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

B43601A5567M87 Payment Methods

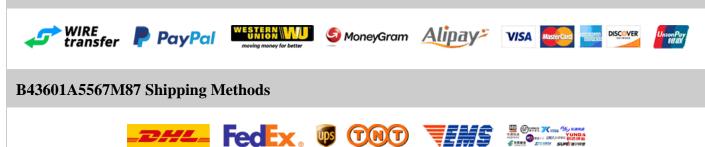

If you have any question about B43601A5567M87, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com