


BCS-103-S-S-PE-BE

BCS-103-S-S-PE-BE Information

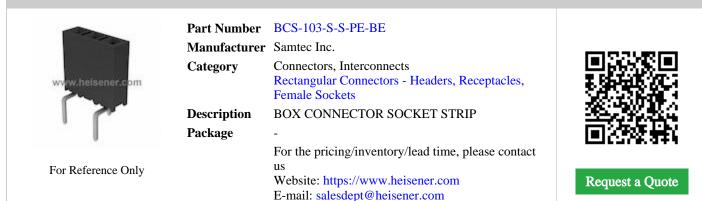

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



BCS-103-S-S-PE-BE Specifications

Manufacturer Part NumberBCS-103-S-S-PE-BEManufacturerSamtec Inc.CategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesTiger Claw? BCSContact TypeReceptacle, Pass ThroughContact TypeBoard to BoardSyleBoard to BoardNumber of Positions LoadedAllNumber of Rows1Number of Rows1Rewspacing - MatingSolderMouring TypeInorde MedicaRowspacing - MatingSolderFerninationSolderContact Finish - MatingGoldContact Finish - MatingSolderFerninationSolderFastening TypeSolderFastening TypeSolderF		
Category Connectors, Interconnects Rectangular Connectors - Headers, Receptacles, Female Sockets Package - Series Tiger Claw? BCS Connector Type Receptacle, Pass Through Connector Type Receptacle, Pass Through Contact Type Board to Board Style Board to Board Number of Positions 3 Number of Positions Loaded All Number of Rows 1 Number of Rows 1 Number of Rows 1 Number of Rows Solder Yearning Type Nong Hole Yearning Type Solder Contact Finish - Mating Gold Contact Finish - Mating Gold Contact Finish - Mating Biak Insulation Color Biak Insulation Height Solor(7.37mm)	Manufacturer Part Number	BCS-103-S-S-PE-BE
Rectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesTiger Claw? BCSConnector TypeReceptacle, Pass ThroughContact TypeFemale SocketStyleBoard to BoardNumber of Positions3Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderFastening TypeQuid (D.Gum)Contact Finish - MatingGoldContact Finish Thickness - MatingJupin (D.Gum)Insulation ColorBlackInsulation Height0.290" (7.37mm)	Manufacturer	Samtec Inc.
Package-SeriesTigr Claw? BCSConactor TypeReceptacle, Pass ThroughContact TypeFemale SocketStyleBoard to BoardNumber of Positions3Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleFastening TypeOlderFastening TypeGoldContact Finish - MatingGoldContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.290" (7.37mm)	Category	Connectors, Interconnects
SeriesTiger Claw? BCSConnector TypeReceptacle, Pass ThroughContact TypeFemale SocketStyleBoard to BoardNumber of Positions3Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleFastening TypeSolderFastening TypeGoldContact Finish - Mating30µin (0.76µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)		Rectangular Connectors - Headers, Receptacles, Female Sockets
Connector TypeReceptacle, Pass ThroughContact TypeFemale SocketStyleBoard to BoardNumber of Positions3Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderFastening TypeQui (0.76µm)Contact Finish - MatingGoldInsulation ColorBlackInsulation Height0.200" (7.37mm)	Package	-
Contact TypeFemale SocketStyleBoard to BoardNumber of Positions3Number of Positions LoadedAllPitch - Mating0.100° (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleFastening TypeSolderContact Finish - MatingGoldContact Finish - MatingBiakInsulation ColorBiackInsulation Height0.200° (7.37mm)	Series	Tiger Claw? BCS
StyleBoard to BoardStyleBoard to BoardNumber of Positions3Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingBlackInsulation ColorBlack	Connector Type	Receptacle, Pass Through
Number of Positions3Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating30µin (0.76µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)	Contact Type	Female Socket
Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting Type-Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingJupin (0.76µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)	Style	Board to Board
Pitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingJupin (0.76µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)	Number of Positions	3
Number of Rows1Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish - Mating30µin (0.76µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)	Number of Positions Loaded	All
Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish - MatingJupin (0.76µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)	Pitch - Mating	0.100" (2.54mm)
Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating30µin (0.76µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)	Number of Rows	1
TerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating30µin (0.76µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)	Row Spacing - Mating	-
Fastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating30µin (0.76µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)	Mounting Type	Through Hole
Contact Finish - MatingGoldContact Finish Thickness - Mating30µin (0.76µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)	Termination	Solder
Contact Finish Thickness - Mating30µin (0.76µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)	Fastening Type	Push-Pull
Insulation ColorBlackInsulation Height0.290" (7.37mm)	Contact Finish - Mating	Gold
Insulation Height 0.290" (7.37mm)	Contact Finish Thickness - Mating	30µin (0.76µm)
	Insulation Color	Black
Contact Length - Post 0.128" (3.25mm)	Insulation Height	0.290" (7.37mm)
	Contact Length - Post	0.128" (3.25mm)
Operating Temperature $-55^{\circ}C \sim 125^{\circ}C$	Operating Temperature	-55°C ~ 125°C
Material Flammability Rating UL94 V-0	Material Flammability Rating	UL94 V-0

Contact Finish - Post	Tin
Mated Stacking Heights	-
Ingress Protection	-
Features	-
	Report errors?

BCS-103-S-S-PE-BE Guarantees



Quality Guarantees


We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

BCS-103-S-S-PE-BE Payment Methods

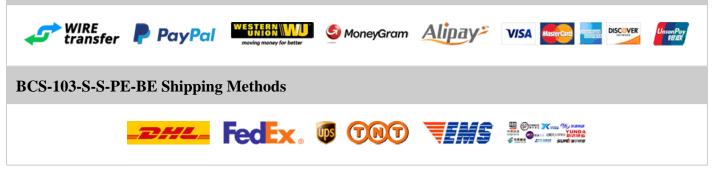

If you have any question about BCS-103-S-S-PE-BE, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com