

BCS-110-F-D-PE

BCS-110-F-D-PE Information

Heisener.com	Part Number Manufacturer Category Description Package	BCS-110-F-D-PE Samtec Inc. Connectors, Interconnects Rectangular Connectors - Headers, Receptacles, Female Sockets BOX CONNECTOR SOCKET STRIP	
For Reference Only		For the pricing/inventory/lead time, please contact us	
Tor Reference Only		Website: https://www.heisener.com E-mail: salesdept@heisener.com	Request a Quote

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



BCS-110-F-D-PE Specifications

Manufacturer Part NumberBCS-110-F-D-PEManufacturerSamtec Inc.CategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesTiger Claw? BCSConnector TypeReceptacle, Pass ThroughContact TypeFemale SocketSyleBoard to BoardNumber of Positions20Number of Positions LoadedAllPich - Mating0.100" (2.54mm)Number of Rows2Row Spacing - MatingNolder Clawming HoleMounting TypeNolder Clawming HoleContact Finish - MatingSolderContact Finish - MatingSolderStation ColorBackMumber of PositionsSolderRow Spacing - MatingSolderStation TypeBush-PullContact Finish - MatingGoldContact Finish - MatingSolderInsulation ColorBackInsulation Fleight0.200" (7.37mm)Contact Length - Post0.128" (3.25mm)Operating Temperature55% C + 125% C		
CategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesTiger Claw? BCSConnector TypeReceptacle, Pass ThroughConnector TypeFemale SocketStyleBoard to BoardNumber of Positions0Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeInrough HoleTerminationSolderFastening TypeOsldContact Finish - MatingGoldContact Finish - MatingGoldInsulation ColorBackInsulation Finish Thickness - MatingJain (0.08µm)Insulation Height0.200" (7.37mm)Contact Length - Post0.128" (3.25mm)	Manufacturer Part Number	BCS-110-F-D-PE
Icetangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesTiger Clav? BCSConnector TypeReceptacle, Pass ThroughContact TypeBoard to BoardStyleBoard to BoardNumber of Positions20Number of Positions LoadedAllPich - Mating0.100° (2.54mm)Number of Rows2Row Spacing - Mating0.100° (2.54mm)Mounting Type0.100° (2.54mm)Young Type0.100° (2.54mm)FreminationSolderForninationGolderForting Type0.100° (2.54mm)Contact Finish - Mating0.100° (2.54mm)ForninationSolderForninationSolderForninationGolderForninationSolderForninationGoldFornination ColorBlackInsulation ColorBlackInsulation Fleight0.200° (7.37mm)Fornination0.128° (3.25mm)	Manufacturer	Samtec Inc.
Package-SeriesTiger Claw? BCSConnector TypeReceptacle, Pass ThroughContact TypeFemale SocketStyleBoard to BoardNumber of Positions20Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting Type0.100" (2.54mm)TerminationSolderFastening TypeOlderFastening TypeGoldContact Finish - MatingGoldContact Finish Thickness - MatingJin (0.08µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.128" (3.25mm)	Category	Connectors, Interconnects
SeriesTiger Claw? BCSConnector TypeReceptacle, Pass ThroughContact TypeFemale SocketStyleBoard to BoardNumber of Positions20Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough HoleFastening TypeSolderContact Finish - MatingGoldContact Finish - MatingGoldInsulation ColorBiackInsulation Height0.290" (7.37mm)Contact Length - Post0.128" (3.25mm)		Rectangular Connectors - Headers, Receptacles, Female Sockets
Connector TypeReceptacle, Pass ThroughContact TypeFemale SocketStyleBoard to BoardNumber of Positions20Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough HoleTerminationSolderFastening TypeQuid Number of SolderContact Finish - MatingGoldContact Finish - MatingBiakInsulation ColorBlackInsulation Height0.200" (7.37mm)Contact Length - Post0.128" (3.25mm)	Package	-
Contact TypeFemale SocketStyleBoard to BoardNumber of Positions20Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting Type0.100" (2.54mm)TerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingBlackInsulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.128" (3.25mm)	Series	Tiger Claw? BCS
StyleBoard to BoardStyleBoard to BoardNumber of Positions20Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.128" (3.25mm)	Connector Type	Receptacle, Pass Through
Yumber of Positions20Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.128" (3.25mm)	Contact Type	Female Socket
Number of Positions LoadedAllPitch - Mating0.100° (2.54mm)Number of Rows2Row Spacing - Mating0.100° (2.54mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.290° (7.37mm)Contact Length - Post0.128° (3.25mm)	Style	Board to Board
Pitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting Type0.100" (2.54mm)TerminationSolderFastening TypeSolderContact Finish - MatingGoldContact Finish Thickness - Matingjuin (0.08µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.128" (3.25mm)	Number of Positions	20
Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingJµin (0.08µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.128" (3.25mm)	Number of Positions Loaded	All
Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingJµin (0.08µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.128" (3.25mm)	Pitch - Mating	0.100" (2.54mm)
Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingJµin (0.08µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.128" (3.25mm)	Number of Rows	2
TerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating3µin (0.08µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.128" (3.25mm)	Row Spacing - Mating	0.100" (2.54mm)
Fastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating3µin (0.08µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.128" (3.25mm)	Mounting Type	Through Hole
Contact Finish - MatingGoldContact Finish Thickness - Mating3µin (0.08µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.128" (3.25mm)	Termination	Solder
Contact Finish Thickness - Mating3µin (0.08µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.128" (3.25mm)	Fastening Type	Push-Pull
Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.128" (3.25mm)	Contact Finish - Mating	Gold
Insulation Height0.290" (7.37mm)Contact Length - Post0.128" (3.25mm)	Contact Finish Thickness - Mating	3µin (0.08µm)
Contact Length - Post 0.128" (3.25mm)	Insulation Color	Black
-	Insulation Height	0.290" (7.37mm)
Operating Temperature $-55^{\circ}C \sim 125^{\circ}C$	Contact Length - Post	0.128" (3.25mm)
	Operating Temperature	-55°C ~ 125°C
Material Flammability Rating UL94 V-0	Material Flammability Rating	UL94 V-0

Contact Finish - Post	Tin
Mated Stacking Heights	-
Ingress Protection	-
Features	-
	Report errors?

BCS-110-F-D-PE Guarantees



Quality Guarantees


We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

BCS-110-F-D-PE Payment Methods

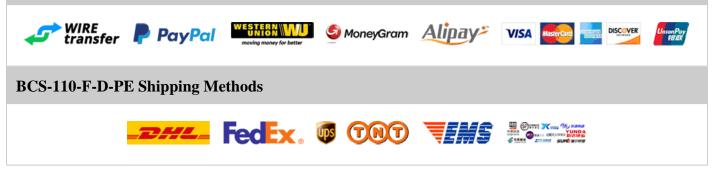

If you have any question about BCS-110-F-D-PE, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com