

BCS-115-LM-S-PE

BCS-115-LM-S-PE Information

Heisener.com	Part Number	BCS-115-LM-S-PE	
	Manufacturer	Samtec Inc.	
	Category	Connectors, Interconnects Rectangular Connectors - Headers, Receptacles, Female Sockets	
	Description	BOX CONNECTOR SOCKET STRIP	
	Package	-	回認疑辩論
For Reference Only		For the pricing/inventory/lead time, please contact us	
		Website: https://www.heisener.com E-mail: salesdept@heisener.com	Request a Quote

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



BCS-115-LM-S-PE Specifications

Manufacturer Part NumberBCS-115-LM-S-PEManufacturerSamtec Inc.CategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesTiger Claw? BCSConnector TypeReceptacle, Pass ThroughContact TypeFemale SocketStyleBoard to BoardNumber of Positions15Number of Positions LoadedAllPich - Mating0.100° (2.54mm)Number of Rows1Rowg Pasing - MatingSolderTerminationSolderFastening TypeSolderContact Finish - MatingGoldContact Finish - MatingGoldState Ini TypeSolderFastening TypeSolderFastening TypeSolderContact Finish - MatingGoldContact Finish Thickness - MatingGuly (0.25µm)Insulation ColorBlackInsulation Height0.200° (7.37mm)Contact Length - Post0.128° (3.25mm)				
CategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesTiger Claw? BCSConnector TypeReceptacle, Pass ThroughConnector TypeBerade SocketStyleBoard to BoardNumber of Positions15Number of Positions LoadedAllPitch - Mating0.100° (2.54mm)Number of Rows1Number of Rows0.100° (2.54mm)Number of Rows0.100° (2.54mm)Number of Rows0.100° (2.54mm)ForeiniationSolderForeiniationSolderForeiniationGoldContact Finish - MatingGoldContact Finish - MatingIlpin (0.25µm)Insulation ColorBlackInsulation Height0.200° (7.37mm)	Manufacturer Part Number	BCS-115-LM-S-PE		
AckageRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesTiger Clav? BCSConnector TypeReceptacle, Pass ThroughContact TypeFemale SocketStyleBoard to BoardNumber of Positions15Number of Positions LoadedAllPitch - Mating0.100° (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeSolderTerminationSolderFastening TypeGoldContact Finish - MatingGoldContact Finish - MatingGoldState of ColorJup (0.25µm)State of TypeSolderFastening TypeSolderFastening TypeBoardState of Type of SolderJup (0.25µm)State of Type of SolderSolderFastening TypeSolderFastening TypeSolderState of Type of SolderJup (0.25µm)State of SolderSolderState of SolderSolderSolder SolderSolderSolder SolderSolderSolder SolderSolderSolder SolderSolderSolder SolderSolderSolder SolderSolderSolder SolderS	Manufacturer	Samtec Inc.		
Package-SeriesTiger Claw? BCSConnector TypeReceptacle, Pass ThroughContact TypeFemale SocketStyleBoard to BoardNumber of Positions15Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleFastening TypeOlderFastening TypeGoldContact Finish - Mating0.100" (2.5µm)Insulation ColorBlackInsulation Height0.200" (7.37mm)	Category	Connectors, Interconnects		
SeriesTiger Claw? BCSConnector TypeReceptacle, Pass ThroughContact TypeFemale SocketStyleBoard to BoardNumber of Positions15Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleFastening TypeSolderFastening TypeGoldContact Finish - MatingGoldContact Finish Thickness - MatingIlpuin (0.25µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)		Rectangular Connectors - Headers, Receptacles, Female Sockets		
Connector TypeReceptacle, Pass ThroughContact TypeFemale SocketStyleBoard to BoardNumber of Positions15Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderFastening TypeQualContact Finish - MatingGoldContact Finish Thickness - MatingJupin (0.25µm)Insulation ColorBlackInsulation Height0.200" (7.37mm)	Package	-		
Contact TypeFemale SocketStyleBoard to BoardNumber of Positions15Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderFastening TypeOuh - PullContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.290" (7.37mm)	Series	Tiger Claw? BCS		
StyleBoard to BoardStyleBoard to BoardNumber of Positions15Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - Mating0.jun (0.25µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)	Connector Type	Receptacle, Pass Through		
Yumber of Positions15Number of Positions LoadedAllPitch - Mating0.100° (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.290° (7.37mm)	Contact Type	Female Socket		
Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackOutput (2.50m)0.290" (7.37mm)	Style	Board to Board		
Pitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.290" (7.37mm)	Number of Positions	15		
Number of Rows1Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)	Number of Positions Loaded	All		
Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)	Pitch - Mating	0.100" (2.54mm)		
Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)	Number of Rows	1		
TerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)	Row Spacing - Mating	-		
Fastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)	Mounting Type	Through Hole		
Contact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)	Termination	Solder		
Contact Finish Thickness - Mating10μin (0.25μm)Insulation ColorBlackInsulation Height0.290" (7.37mm)	Fastening Type	Push-Pull		
Insulation ColorBlackInsulation Height0.290" (7.37mm)	Contact Finish - Mating	Gold		
Insulation Height 0.290" (7.37mm)	Contact Finish Thickness - Mating	10µin (0.25µm)		
	Insulation Color	Black		
Contact Length - Post 0.128" (3.25mm)	Insulation Height	0.290" (7.37mm)		
	Contact Length - Post	0.128" (3.25mm)		
Operating Temperature $-55^{\circ}C \sim 125^{\circ}C$	Operating Temperature	-55°C ~ 125°C		
Material Flammability Rating UL94 V-0	Material Flammability Rating	UL94 V-0		

Contact Finish - Post	Tin		
Mated Stacking Heights	-		
Ingress Protection	-		
Features	-		
		Report	errors?

BCS-115-LM-S-PE Guarantees



Quality Guarantees


We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

BCS-115-LM-S-PE Payment Methods

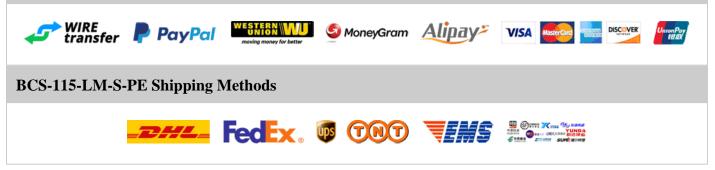

If you have any question about BCS-115-LM-S-PE, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com