

BCS-116-L-S-PE-009

BCS-116-L-S-PE-009 Information

		BCS-116-L-S-PE-009	
	Manufacturer	Samtec Inc.	
Heisener.com Distantiver statution	Category	Connectors, Interconnects Rectangular Connectors - Headers, Receptacles, Female Sockets	
	Description	BOX CONNECTOR SOCKET STRIP	
	Package	-	回致武振
For Reference Only		For the pricing/inventory/lead time, please contact	
		us Website: https://www.heisener.com E-mail: salesdept@heisener.com	Request a Quote

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



BCS-116-L-S-PE-009 Specifications

Manufacturer Part NumberBCS-116-L-S-PE-009ManufacturerSamtee Inc.CategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesTiger Clane, PGSContact TypeReceptacle, Pass ThroughContact TypeBoard to BoardStyleBoard to BoardNumber of PositionsI6Number of Positions Loaded15Number of Rows1Number of Rows1Number of RowsSolderFreminationSolderSteining TypeSolderContact Finish - MatingGoldSteining TypeGold (0.5µm)Contact Finish - MatingSolderInsulation ColorBlackInsulation ColorBlackContact Finish - MatingColor(2.5µm)Contact Finish - MatingSolderSteining TypeSolderFatening TypeGold (0.5µm)Contact Finish - MatingGold (0.5µm)Insulation ColorBlackInsulation ColorBlackInsulation ColorSolder (0.5µm)Contact Finish Thickness - MatingO.90° (0.3µmn)Contact Lingth - PostO.102° (0.5µm)Contact Lingth - PostO.102° (0.5µm)Conta		
Category Connectors, Interconnects Rectangular Connectors - Headers, Receptacles, Female Sockets Package - Series Tiger Claw? BCS Connector Type Receptacle, Pass Through Contact Type Female Socket Style Board to Board Number of Positions 16 Number of Positions Loaded 15 Pitch - Mating 0.100° (2.54mm) Number of Rows 1 Number of Rows 1 Number of Rows 1 Nouning Type Through Hole Young Type Odd Young Young Young Young Young Young	Manufacturer Part Number	BCS-116-L-S-PE-009
Indext Connectors - Headers, Receptacles, Female SocketsPackage-SeriesTiger Claw? BCSConnector TypeReceptacle, Pass ThroughContact TypeBoard to BoardStyleBoard to BoardNumber of Positions6Number of Positions Loaded15Number of Rows0.100° (2.54mm)Number of Rows1Number of Rows1Number of Rows0.100° (2.54mm)Number of Rows1Steining TypeSolderYenning TypeSolderSteining TypeSolderContact Finish FukatingGoldContact Finish Fukating10µín (0.5µm)Insulation ColorBackInsulation Height0.20° (7.37mm)Contact Length - Post0.128° (3.25mm)Steining TypeSite ClaS°C	Manufacturer	Samtec Inc.
Package-SeriesTiger Claw? BCSConnector TypeReceptacle, Pass ThroughContact TypeFemale SocketStyleBoard to BoardNumber of Positions16Number of Positions Loaded15Pitch - Mating0.100° (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderFastening TypeUpin (0.25µm)Contact Finish - MatingGoldContact Finish Thickness - MatingIlpin (0.25µm)Insulation ColorBlackInsulation Height0.290° (7.37mm)Contact Length - Post0.128° (3.25mm)Operating Temperature-55° C ~ 125°C	Category	Connectors, Interconnects
SeriesTiger Claw? BCSConnector TypeReceptacle, Pass ThroughContact TypeFemale SocketStyleBoard to BoardNumber of Positions16Number of Positions Loaded15Pitch - Mating0.100° (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderContact Finish - MatingGoldContact Finish - MatingGoldStation ColorBackInsulation ColorBackInsulation Height0.290° (7.37mm)Contact Fungt-Post5°C ~ 125°C		Rectangular Connectors - Headers, Receptacles, Female Sockets
Connector Type Receptacle, Pass Through Contact Type Female Socket Style Board to Board Number of Positions 16 Number of Positions Loaded 15 Pitch - Mating 0.100° (2.54mm) Number of Rows 1 Row Spacing - Mating - Mounting Type Through Hole Termination Solder Contact Finish - Mating Gold Contact Finish - Mating Gold Contact Finish Thickness - Mating Black Insulation Color Black Insulation Height 0.290° (7.37mm) Contact Length - Post 0.128° (3.25mn)	Package	-
Contact TypeFemale SocketStyleBoard to BoardNumber of Positions16Number of Positions Loaded15Pitch - Mating0.100° (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - Mating0.00Insulation ColorBlackInsulation Height0.290° (7.37mm)Contact Length - Post0.128° (3.25mm)Operating Temperature-55°C ~ 125°C	Series	Tiger Claw? BCS
StyleBoard to BoardStyleBoard to BoardNumber of Positions16Number of Positions Loaded15Pitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation Height0.290" (7.37mm)Contact Length - Post0.128" (3.25mm)Operating Temperature-55°C ~ 125°C	Connector Type	Receptacle, Pass Through
Number of Positions 16 Number of Positions Loaded 15 Pitch - Mating 0.100" (2.54mm) Number of Rows 1 Row Spacing - Mating - Mounting Type Through Hole Termination Solder Fastening Type Push-Pull Contact Finish - Mating Gold Contact Finish Thickness - Mating Jupin (0.25µm) Insulation Color Black Insulation Height 0.290" (7.37mm) Contact Length - Post 0.128" (3.25mm)	Contact Type	Female Socket
Number of Positions Loaded15Pitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingIoµin (0.25µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.128" (3.25mm)Operating Temperature-55°C ~ 125°C	Style	Board to Board
Pitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingBlackInsulation Color0.290" (7.37mm)Contact Length - Post0.128" (3.25mm)Operating Temperature55°C ~ 125°C	Number of Positions	16
Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.128" (3.25mm)Operating Temperature-55°C ~ 125°C	Number of Positions Loaded	15
Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingI/uin (0.25µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.128" (3.25mm)Operating Temperature-55°C ~ 125°C	Pitch - Mating	0.100" (2.54mm)
Mounting TypeThrough HoleMounting TypeSolderTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.128" (3.25mm)Operating Temperature-55°C ~ 125°C	Number of Rows	1
TerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.128" (3.25mm)Operating Temperature-55°C ~ 125°C	Row Spacing - Mating	-
Fastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.128" (3.25mm)Operating Temperature-55°C ~ 125°C	Mounting Type	Through Hole
Contact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.128" (3.25mm)Operating Temperature-55°C ~ 125°C	Termination	Solder
Contact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.128" (3.25mm)Operating Temperature-55°C ~ 125°C	Fastening Type	Push-Pull
Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.128" (3.25mm)Operating Temperature-55°C ~ 125°C	Contact Finish - Mating	Gold
Insulation Height0.290" (7.37mm)Contact Length - Post0.128" (3.25mm)Operating Temperature-55°C ~ 125°C	Contact Finish Thickness - Mating	10µin (0.25µm)
Contact Length - Post0.128" (3.25mm)Operating Temperature-55°C ~ 125°C	Insulation Color	Black
Operating Temperature $-55^{\circ}C \sim 125^{\circ}C$	Insulation Height	0.290" (7.37mm)
	Contact Length - Post	0.128" (3.25mm)
Material Flammability Rating UL94 V-0	Operating Temperature	-55°C ~ 125°C
	Material Flammability Rating	UL94 V-0

Contact Finish - Post	Tin
Mated Stacking Heights	-
Ingress Protection	-
Features	-
	Report errors?

BCS-116-L-S-PE-009 Guarantees



Quality Guarantees


We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

BCS-116-L-S-PE-009 Payment Methods

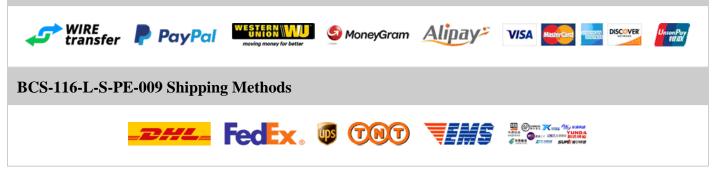

If you have any question about BCS-116-L-S-PE-009, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com