

BCS-122-L-D-TE-018

BCS-122-L-D-TE-018 Information

Heisener.com		BCS-122-L-D-TE-018	
	Manufacturer	Samtec Inc.	THE RANGES FOR
	Category	Connectors, Interconnects	
		Rectangular Connectors - Headers, Receptacles, Female Sockets	
	Description	BOX CONNECTOR SOCKET STRIP	
	Package	-	国際認識
For Reference Only		For the pricing/inventory/lead time, please contact	
		us	
		Website: https://www.heisener.com	Request a Quote
		E-mail: salesdept@heisener.com	

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



BCS-122-L-D-TE-018 Specifications

Manufacturer Part Number BCS-122-L-D-TE-018 Manufacturer Samtec Inc. Category Connectors, Interconnects Rectangular Connectors - Headers, Receptacles, Female Sockets Rectangular Connectors - Headers, Receptacles, Female Sockets Package - Series Tiger Claw? BCS Connector Type Receptacle Contact Type Female Socket Style Board to Board Number of Positions 44 Number of Positions Loaded 43 Number of Rows 2 Row Spacing - Mating 0.100" (2.54mm) Mounting Type Through Hole Fastening Type Quid Pub-Pull Contact Finish - Mating Gold Contact Finish - Mating Iopin (0.25µm)		
CategoryConnectors, InterconnectsCategoryRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesTiger Claw? BCSConnector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions44Number of Positions Loaded3Pitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)	Manufacturer Part Number	BCS-122-L-D-TE-018
Indext of the sector of the	Manufacturer	Samtec Inc.
Package-SeriesTiger Claw? BCSConnector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions44Number of Positions Loaded43Pitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough HoleFastening TypeSolderContact Finish - MatingGoldContact Finish - MatingJuin (0.25µm)	Category	Connectors, Interconnects
SeriesTiger Claw? BCSConnector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions44Number of Positions Loaded43Pitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough HoleFerminationSolderFastening TypeQualGoldGoldContact Finish - Mating10µin (0.25µm)		Rectangular Connectors - Headers, Receptacles, Female Sockets
Connector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions44Number of Positions Loaded43Pitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating1/µin (0.25µm)	Package	-
Contact TypeFemale SocketStyleBoard to BoardNumber of Positions44Number of Positions Loaded43Pitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - Mating10µin (0.25µm)	Series	Tiger Claw? BCS
StyleBoard to BoardNumber of Positions44Number of Positions Loaded43Pitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting Type0.100" (2.54mm)TerminationSolderFastening TypePush-PullContact Finish - MatingGoldYoung Contact Finish Thickness - Mating10µin (0.25µm)	Connector Type	Receptacle
Number of Positions44Number of Positions Loaded43Pitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldIonact Finish Thickness - Mating10µin (0.25µm)	Contact Type	Female Socket
Number of Positions Loaded43Pitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldYoung Contact Finish - Mating10µin (0.25µm)	Style	Board to Board
Pitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldYoung Contact Finish - Mating10µin (0.25µm)	Number of Positions	44
Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)	Number of Positions Loaded	43
Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)	Pitch - Mating	0.100" (2.54mm)
Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)	Number of Rows	2
TerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)	Row Spacing - Mating	0.100" (2.54mm)
Fastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)	Mounting Type	Through Hole
Contact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)	Termination	Solder
Contact Finish Thickness - Mating 10µin (0.25µm)	Fastening Type	Push-Pull
	Contact Finish - Mating	Gold
Insulation Color Black	Contact Finish Thickness - Mating	10μin (0.25μm)
	Insulation Color	Black
Insulation Height 0.290" (7.37mm)	Insulation Height	0.290" (7.37mm)
Contact Length - Post 0.122" (3.10mm)	Contact Length - Post	0.122" (3.10mm)
Operating Temperature $-55^{\circ}C \sim 125^{\circ}C$	Operating Temperature	-55°C ~ 125°C
Material Flammability Rating UL94 V-0	Material Flammability Rating	UL94 V-0

Contact Finish - Post	Tin		
Mated Stacking Heights	-		
Ingress Protection	-		
Features	-		
		Report	errors?

BCS-122-L-D-TE-018 Guarantees



Quality Guarantees


We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

BCS-122-L-D-TE-018 Payment Methods

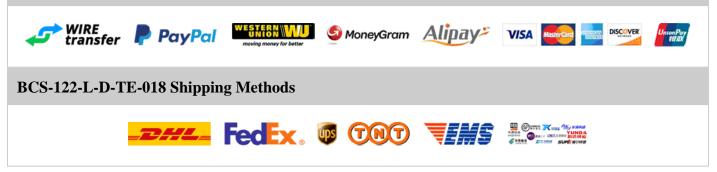

If you have any question about BCS-122-L-D-TE-018, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com