

BCS-122-L-S-HE-022

BCS-122-L-S-HE-022 Information

	Part Number	BCS-122-L-S-HE-022	
	Manufacturer	Samtec Inc.	
Heisener.com	Category	Connectors, Interconnects Rectangular Connectors - Headers, Receptacles, Female Sockets	- 日光泉,日 24日時の4日 23日前後の4日
	Description Package	BOX CONNECTOR SOCKET STRIP	
For Reference Only		For the pricing/inventory/lead time, please contact us Website: https://www.heisener.com E-mail: salesdept@heisener.com	Request a Quote

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



BCS-122-L-S-HE-022 Specifications

Manufacturer Part NumberBCS-122-L-S-HE-022ManufacturerSamtec Inc.CategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesTiger Claw? BCSContact TypeReceptacleContact TypeSocketStyleBoard to BoardNumber of Positions22Number of Positions Loaded1Number of Rows1Number of Rows1Receptacle SocketStreing TypeSolderMounting TypeThrough Hole, Right AngleStreing TypeGold OctacumentContact Finish - MatingGoldStreing TypeGoldStreing TypeInforugationalStreing TypeSolderStreing TypeInforugationalContact Finish - MatingGoldContact Finish Thickness - MatingJulo" (2.79mn)Contact Hough - PostJulo" (2.79mn)Contact Finish ThicknessMatingStreing TypeJulo" (2.79mn)Contact Lingt - PostJulo" (2.79mn)Contact Lingt - PostJulo" (2.79mn)Contact Lingt - PostJulo" (2.190m) <th></th> <th></th>				
Category Connectors, Interconnects Rectangular Connectors - Headers, Receptacles, Female Sockets Package - Series Tiger Claw? BCS Connector Type Receptacle Contact Type Female Socket Style Board to Board Number of Positions 22 Number of Positions Loaded 1 Pitch - Mating 0.100" (2.54mm) Number of Rows 1 Number of Rows 1 Receptacle Solder Streing Type Solder Contact Finish - Mating Gold Contact Finish Thickness - Mating Jupin (0.25µm) Solari Color Black Solari Color Solari Colon Solari Color Solari Colon Solari Color Solari Colon Solari Color Solari Color	Manufacturer Part Number	BCS-122-L-S-HE-022		
Package-SeriesTiger Claw? BCSConnector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions22Number of Positions Loaded1Pitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - MatingSolderTerminationSolderFastening TypeOudContact Finish - MatingGoldContact Finish - MatingGoldStelening TypeGoldStelening TypeJuji (0.25µm)Contact Finish - MatingIoµin (0.25µm)Sulation ColorBlackInsulation Height0.110" (2.79mm)Contact Length - Post0.125" (3.18mm)Operating Temperature-55°C ~ 125°C	Manufacturer	Samtec Inc.		
Package-SeriesTiger Claw? BCSConnector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions22Number of Positions Loaded1Pitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough Hole, Right AngleTerminationSolderFastening TypeQualContact Finish - MatingGoldContact Finish Thickness - MatingIlou'n (2.54mm)Insulation ColorBlackInsulation Height0.110" (2.79mm)Contact Length - Post0.125" (3.18mm)Operating Temperature-55°C ~ 125°C	Category	Connectors, Interconnects		
SeriesTiger Claw? BCSConnector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions22Number of Positions Loaded21Pitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough Hole, Right AngleTerminationSolderContact Finish - Mating0.604Contact Finish - MatingInjun (0.25µm)Contact Finish Thickness - MatingBackInsulation ColorBlackInsulation Height0.110" (2.79mm)Contact Length - Post0.125" (3.18mm)Operating Temperature-55°C ~ 125°C		Rectangular Connectors - Headers, Receptacles, Female Sockets		
Connector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions22Number of Positions Loaded21Pitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough Hole, Right AngleTerminationSolderContact Finish - Mating0.00Outact Finish - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.110" (2.79mm)Contact Length - Post0.125" (3.18mm)Operating Temperature-55°C ~ 125°C	Package	-		
Contact TypeFemale SocketStyleBoard to BoardNumber of Positions22Number of Positions Loaded21Pitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough Hole, Right AngleTerminationSolderFastening TypePush-PullContact Finish - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.110" (2.79mm)Contact Length - Post0.125" (3.18mm)Operating Temperature-55°C ~ 125°C	Series	Tiger Claw? BCS		
ArrowStyleBoard to BoardNumber of Positions22Number of Positions Loaded21Pitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough Hole, Right AngleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.110" (2.79mm)Contact Length - Post0.125" (3.18mm)Operating Temperature-55°C ~ 125°C	Connector Type	Receptacle		
Number of Positions22Number of Positions Loaded21Pitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough Hole, Right AngleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingJupin (0.25µm)Insulation ColorBlackInsulation Height0.110" (2.79mm)Contact Length - Post0.125" (3.18mm)Operating Temperature-55°C ~ 125°C	Contact Type	Female Socket		
Number of Positions Loaded21Pitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting Type-Mounting TypeSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingBlackInsulation Color0.110" (2.79mm)Contact Length - Post0.125" (3.18mm)Operating Temperature55°C ~ 125°C	Style	Board to Board		
Pitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough Hole, Right AngleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingIlouin (0.25µm)Insulation ColorBlackInsulation Height0.110" (2.79mm)Contact Length - Post55°C ~ 125°C	Number of Positions	22		
Number of Rows1Row Spacing - Mating-Mounting TypeThrough Hole, Right AngleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.110" (2.79mm)Contact Length - Post0.125" (3.18mm)Operating Temperature-55°C ~ 125°C	Number of Positions Loaded	21		
Row Spacing - Mating-Mounting TypeThrough Hole, Right AngleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingIupin (0.25µm)Insulation ColorBlackInsulation Height0.110" (2.79mm)Contact Length - Post0.125" (3.18mm)Operating Temperature-55°C ~ 125°C	Pitch - Mating	0.100" (2.54mm)		
Mounting TypeThrough Hole, Right AngleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.110" (2.79mm)Contact Length - Post0.125" (3.18mm)Operating Temperature-55°C ~ 125°C	Number of Rows	1		
TerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.110" (2.79mm)Contact Length - Post0.125" (3.18mm)Operating Temperature-55°C ~ 125°C	Row Spacing - Mating	-		
Fastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.110" (2.79mm)Contact Length - Post0.125" (3.18mm)Operating Temperature-55°C ~ 125°C	Mounting Type	Through Hole, Right Angle		
Contact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.110" (2.79mm)Contact Length - Post0.125" (3.18mm)Operating Temperature-55°C ~ 125°C	Termination	Solder		
Contact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.110" (2.79mm)Contact Length - Post0.125" (3.18mm)Operating Temperature-55°C ~ 125°C	Fastening Type	Push-Pull		
Insulation ColorBlackInsulation Height0.110" (2.79mm)Contact Length - Post0.125" (3.18mm)Operating Temperature-55°C ~ 125°C	Contact Finish - Mating	Gold		
Insulation Height 0.110" (2.79mm) Contact Length - Post 0.125" (3.18mm) Operating Temperature -55°C ~ 125°C	Contact Finish Thickness - Mating	10μin (0.25μm)		
Contact Length - Post0.125" (3.18mm)Operating Temperature-55°C ~ 125°C	Insulation Color	Black		
Operating Temperature $-55^{\circ}C \sim 125^{\circ}C$	Insulation Height	0.110" (2.79mm)		
	Contact Length - Post	0.125" (3.18mm)		
Material Flammability Rating UL94 V-0	Operating Temperature	-55°C ~ 125°C		
	Material Flammability Rating	UL94 V-0		

Contact Finish - Post	Tin		
Mated Stacking Heights	-		
Ingress Protection	-		
Features	-		
		Report	errors?

BCS-122-L-S-HE-022 Guarantees



Quality Guarantees


We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

BCS-122-L-S-HE-022 Payment Methods

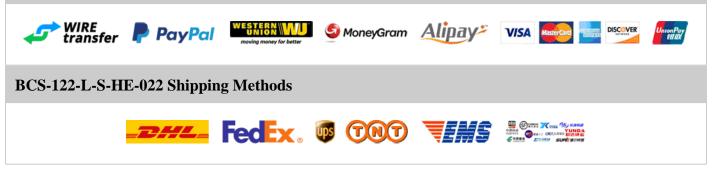

If you have any question about BCS-122-L-S-HE-022, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com