

BCS-124-L-S-DE-002

BCS-124-L-S-DE-002 Information

Heisener.com Ontal levice sant ter	Part Number Manufacturer Category Description Package	BCS-124-L-S-DE-002 Samtec Inc. Connectors, Interconnects Rectangular Connectors - Headers, Receptacles, Female Sockets BOX CONNECTOR SOCKET STRIP		
For Reference Only	8	For the pricing/inventory/lead time, please contact us Website: https://www.heisener.com E-mail: salesdept@heisener.com	Request a Quote	

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



BCS-124-L-S-DE-002 Specifications

Manufacturer Part NumberBCS-124-L-S-DE-002ManufacturerSamtec Inc.CategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesTiger Claw? BCSConnector TypeReceptacle, Bottom or Top EntryContact TypeBoardStyleBoardNumber of Positions Loaded2Pitch - Mating0.100" (2.54mm)Number of Rows1Number of Rows0.100" (2.54mm)Mouting TypePhole HoleYerminationSolderFerminationSolderFortact Finish - MatingOldou (2.52mm)Insulation ColorBlackInsulation Finish - MatingOldou (3.37mm)Contact Finish - Mating0.200" (3.37mm)Contact Finish Thickness - Mating0.102" (3.05mm)Contact Length - Post0.102" (3.05mm)Contact Length - Post0.102" (3.05mm)Contact Length - Post0.102" (3.05mm)Contact Length - Post0.102" (3.05mm)Contact Finish Thicknes0.120" (3.05mm)Contact Finish Discine0.120" (3.05mm)Contact Length - Post0.120" (3.05mm)Contact Discine The				
CategoryConnectors - IterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesTiger Claw? BCSConnector TypeReceptacle, Bottom or Top EntryContact TypeBoard to BoardStyleBoard to BoardNumber of Positions24Number of Positions Loaded3Number of Rows1Number of Rows1Number of Rows1Number of RowsSolderYoung TypeSolderNouting TypeSolderForninationSolderForninationGoldNutation ColorBackInsulation ColorBackInsulation Finish Thickness - Mating0.00° (7.37mn)Insulation Height0.20° (7.35°COperating Temperatures5°C ~ 125°C	Manufacturer Part Number	BCS-124-L-S-DE-002		
Icataguar Connectors - Headers, Receptacles, Female SocketsPackage-SeriesTiger Claw? BCSConnector TypeReceptacle, Bottom or Top EntryContact TypeBoard to BoardStyleBoard to BoardNumber of Positions24Number of Positions Loaded3Pitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeMouge HoleForminationSolderForminationSolderFortact Finish - MatingGoldContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.290" (7.37mm)Insulation Height0.120" (3.05mm)Operating Temperature55° < 125°C	Manufacturer	Samtec Inc.		
Package-SeriesTiger Claw? BCSConnector TypeReceptacle, Bottom or Top EntryContact TypeFemale SocketStyleBoard to BoardNumber of Positions24Number of Positions Loaded23Pitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Young TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - Mating10/un (0.25µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.120" (3.05mm)Operating Temperature-55°C ~ 125°C	Category	Connectors, Interconnects		
SeriesTiger Claw? BCSConnector TypeReceptacle, Bottom or Top EntryContact TypeFemale SocketStyleBoard to BoardNumber of Positions24Number of Positions Loaded23Pitch - Mating0.100° (2.54mm)Number of Rows1Row Spacing - Mating-Mounting Typeof doldFerminationSolderForninationGoldContact Finish - Mating0.100° (2.54mm)Contact Finish - Mating-Board Hole-Mounting TypeSolderForninationSolderContact Finish - MatingGoldContact Finish - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.290° (7.37mm)Contact Length - Post0.120° (3.05mm)Operating Temperature-55° C~ 125°C		Rectangular Connectors - Headers, Receptacles, Female Sockets		
Connector TypeReceptacle, Bottom or Top EntryContact TypeFemale SocketStyleBoard to BoardNumber of Positions24Number of Positions Loaded23Pitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderContact Finish - MatingGoldContact Finish Thickness - MatingIolµin (0.25µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.120" (3.05mm)Operating Temperature-55°C ~ 125°C	Package	-		
Contact TypeFemale SocketStyleBoard to BoardNumber of Positions24Number of Positions Loaded23Pitch - Mating0.100° (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - Mating0.10µí (0.25µm)Insulation ColorBlackInsulation Height0.290° (7.37mm)Contact Length - Post0.120° (3.05mm)Operating Temperature-55°C ~ 125°C	Series	Tiger Claw? BCS		
Style Board to Board Number of Positions 24 Number of Positions Loaded 23 Pitch - Mating 0.100" (2.54mm) Number of Rows 1 Row Spacing - Mating - Mounting Type Through Hole Termination Solder Fastening Type Push-Pull Contact Finish - Mating Gold Insulation Color Black Insulation Height 0.290" (7.37mm) Operating Temperature 55°C ~ 125°C	Connector Type	Receptacle, Bottom or Top Entry		
Number of Positions 24 Number of Positions Loaded 23 Pitch - Mating 0.100" (2.54mm) Number of Rows 1 Row Spacing - Mating - Mounting Type Through Hole Termination Solder Fastening Type Push-Pull Contact Finish - Mating Gold Insulation Color Black Insulation Height 0.290" (7.37mm) Operating Temperature -55°C ~ 125°C	Contact Type	Female Socket		
Number of Positions Loaded23Pitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.120" (3.05mm)Operating Temperature-55°C ~ 125°C	Style	Board to Board		
Pitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingIlpuin (0.25µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.120" (3.05mm)Operating Temperature55°C ~ 125°C	Number of Positions	24		
Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.120" (3.05mm)Operating Temperature-55°C ~ 125°C	Number of Positions Loaded	23		
Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingI/uin (0.25µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.120" (3.05mm)Operating Temperature55°C ~ 125°C	Pitch - Mating	0.100" (2.54mm)		
Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.120" (3.05mm)Operating Temperature-55°C ~ 125°C	Number of Rows	1		
TerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.120" (3.05mm)Operating Temperature-55°C ~ 125°C	Row Spacing - Mating	-		
Fastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.120" (3.05mm)Operating Temperature-55°C ~ 125°C	Mounting Type	Through Hole		
Contact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.120" (3.05mm)Operating Temperature-55°C ~ 125°C	Termination	Solder		
Contact Finish Thickness - Mating10μin (0.25μm)Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.120" (3.05mm)Operating Temperature-55°C ~ 125°C	Fastening Type	Push-Pull		
Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.120" (3.05mm)Operating Temperature-55°C ~ 125°C	Contact Finish - Mating	Gold		
Insulation Height0.290" (7.37mm)Contact Length - Post0.120" (3.05mm)Operating Temperature-55°C ~ 125°C	Contact Finish Thickness - Mating	10µin (0.25µm)		
Contact Length - Post0.120" (3.05mm)Operating Temperature-55°C ~ 125°C	Insulation Color	Black		
Operating Temperature $-55^{\circ}C \sim 125^{\circ}C$	Insulation Height	0.290" (7.37mm)		
	Contact Length - Post	0.120" (3.05mm)		
Material Elemental liter Deting	Operating Temperature	-55°C ~ 125°C		
Material Flammability Rating 0L94 V-0	Material Flammability Rating	UL94 V-0		

Contact Finish - Post	Tin		
Mated Stacking Heights	-		
Ingress Protection	-		
Features	-		
		Report	errors?

BCS-124-L-S-DE-002 Guarantees



Quality Guarantees


We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

BCS-124-L-S-DE-002 Payment Methods

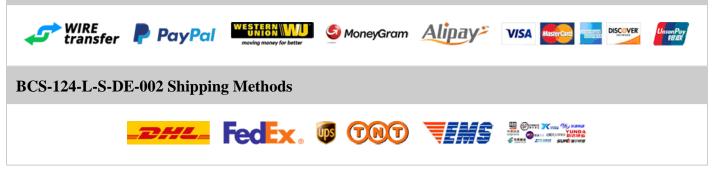

If you have any question about BCS-124-L-S-DE-002, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com