

BCS-124-L-S-TE-001

BCS-124-L-S-TE-001 Information

Heisener.com	Part Number Manufacturer Category Description	BCS-124-L-S-TE-001 Samtec Inc. Connectors, Interconnects Rectangular Connectors - Headers, Receptacles, Female Sockets BOX CONNECTOR SOCKET STRIP	
	Package		
For Reference Only		For the pricing/inventory/lead time, please contact us Website: https://www.heisener.com E-mail: salesdept@heisener.com	Request a Quote

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



BCS-124-L-S-TE-001 Specifications

Manufacturer Part NumberBCS-124-L-S-TE-001ManufacturerSamtee Inc.CategoryConnectors, InterconnectsPackage-Package-SeriesTiger Claney BCSConnector TypeReceptacles, Female SocketsContact TypeReceptacleContact TypeBoard to BoardNumber of Positions24Number of Positions Loaded1Number of Rows1Number of Rows1Number of Rows1FeminationSolderFatening TypeSolderContact Finish - MatingSolderContact Finish - MatingGold (254mm)Contact Finish - MatingSolderStatening TypeGolderStatening TypeSolderStatening TypeSolderContact Finish - MatingGold (052mn)Contact Finish - MatingSolderStatening TypeSolderStatening TypeSolderContact Finish - MatingSolderContact Finish - MatingSolderStatening TypeSolderStatening TypeSolderContact Finish Thickness - MatingSolderIsulation ColorBlackIsulation ColorSolderStatening TypeSolderStatening TypeSolderStatening TypeSolderStatening TypeSolderStatening TypeSolderStatening TypeSolderStatening TypeSolderStatening Type <td< th=""><th></th><th></th></td<>		
Category Connectors, Interconnects Rectangular Connectors - Headers, Receptacles, Female Sockets Package - Series Tiger Claw? BCS Connector Type Receptacle Contact Type Female Socket Style Board to Board Number of Positions 24 Number of Positions Loaded 23 Pitch - Mating 0.100° (2.54mm) Number of Rows 1 Number of Rows 1 Number of Rows 0.100° (2.54mm) Number of Rows 1 Row Spacing - Mating - Nounting Type Through Hole Young Type Olde Fastening Type Quid (0.25µm) Contact Finish - Mating Olda Contact Finish Thickness - Mating Iopin (0.25µm) Insulation Color Black Insulation Height 0.290° (7.37mm) Contact Length - Post 0.122° (3.10mm)	Manufacturer Part Number	BCS-124-L-S-TE-001
Package-SeriesTiger Claw? BCSConnector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions24Number of Positions Loaded3Pitch - Mating0.100" (2.54mm)Number of Rows1Number of Rows50derYerminationSolderTerminationSolderFastening TypeDush PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.5µm)Contact Finish Thickness - Mating10µin (0.5µm)Contact Finish Thickness - Mating10µin (0.5µm)Insulation ColorBlackInsulation Height0.200" (7.37mm)Contact Length - Post0.122" (3.10mm)Operating Temperature-55°C ~ 125°C	Manufacturer	Samtec Inc.
Package-SeriesTiger Claw? BCSConnector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions24Number of Positions Loaded23Pitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderFastening TypeOddContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.122" (3.10mm)Operating Temperature55°C ~ 125°C	Category	Connectors, Interconnects
SeriesTiger Claw? BCSConnector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions24Number of Positions Loaded23Pitch - Mating0.100° (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderContact Finish - MatingGoldContact Finish - MatingGoldSoltar Finish - MatingGoldContact Finish - MatingBackInsulation ColorBlackInsulation Height0.20° (7.37mm)Contact Length - Post0.12° (3.10mm)Operating Temperature-5°C ~ 125°C		Rectangular Connectors - Headers, Receptacles, Female Sockets
Connector Type Receptacle Contact Type Female Socket Style Board to Board Number of Positions 24 Number of Positions Loaded 23 Pitch - Mating 0.100° (2.54mm) Number of Rows 1 Row Spacing - Mating - Mounting Type Through Hole Termination Solder Fastening Type Push-Pull Contact Finish - Mating Gold Contact Finish Thickness - Mating Black Insulation Color Black Insulation Height 0.290° (7.37mm) Contact Length - Post 0.122° (3.10mm)	Package	-
Contact TypeFemale SocketStyleBoard to BoardNumber of Positions24Number of Positions Loaded23Pitch - Mating0.100° (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - Mating0.00Insulation ColorBlackInsulation Height0.290° (7.37mm)Contact Length - Post0.122° (3.10mm)	Series	Tiger Claw? BCS
StyleBoard to BoardStyleBoard to BoardNumber of Positions24Number of Positions Loaded23Pitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingIoµin (0.25µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post55°C ~ 125°C	Connector Type	Receptacle
Number of Positions 24 Number of Positions Loaded 23 Pitch - Mating 0.100" (2.54mm) Number of Rows 1 Row Spacing - Mating - Mounting Type Through Hole Termination Solder Fastening Type Push-Pull Contact Finish - Mating Gold Contact Finish Thickness - Mating Jupin (0.25µm) Insulation Color Black Insulation Height 0.290" (7.37mm) Contact Length - Post 0.122" (3.10mm)	Contact Type	Female Socket
Number of Positions Loaded23Pitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.122" (3.10mm)Operating Temperature-55°C ~ 125°C	Style	Board to Board
Pitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingBlackInsulation Color0.290" (7.37mm)Contact Length - Post0.122" (3.10mm)Operating Temperature55°C ~ 125°C	Number of Positions	24
Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.122" (3.10mm)Operating Temperature-55°C ~ 125°C	Number of Positions Loaded	23
Row Spacing - Mating-Row Spacing - MatingThrough HoleMounting TypeSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingI/uin (0.25µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.122" (3.10mm)Operating Temperature-55°C ~ 125°C	Pitch - Mating	0.100" (2.54mm)
Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.122" (3.10mm)Operating Temperature-55°C ~ 125°C	Number of Rows	1
TerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.122" (3.10mm)Operating Temperature-55°C ~ 125°C	Row Spacing - Mating	-
Fastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.122" (3.10mm)Operating Temperature-55°C ~ 125°C	Mounting Type	Through Hole
Contact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.122" (3.10mm)Operating Temperature-55°C ~ 125°C	Termination	Solder
Contact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.122" (3.10mm)Operating Temperature-55°C ~ 125°C	Fastening Type	Push-Pull
Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.122" (3.10mm)Operating Temperature-55°C ~ 125°C	Contact Finish - Mating	Gold
Insulation Height 0.290" (7.37mm) Contact Length - Post 0.122" (3.10mm) Operating Temperature -55°C ~ 125°C	Contact Finish Thickness - Mating	10µin (0.25µm)
Contact Length - Post0.122" (3.10mm)Operating Temperature-55°C ~ 125°C	Insulation Color	Black
Operating Temperature $-55^{\circ}C \sim 125^{\circ}C$	Insulation Height	0.290" (7.37mm)
	Contact Length - Post	0.122" (3.10mm)
Material Flammability Rating UL94 V-0	Operating Temperature	-55°C ~ 125°C
	Material Flammability Rating	UL94 V-0

Contact Finish - Post	Tin
Mated Stacking Heights	-
Ingress Protection	-
Features	-
	Report errors?

BCS-124-L-S-TE-001 Guarantees



Quality Guarantees


We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

BCS-124-L-S-TE-001 Payment Methods

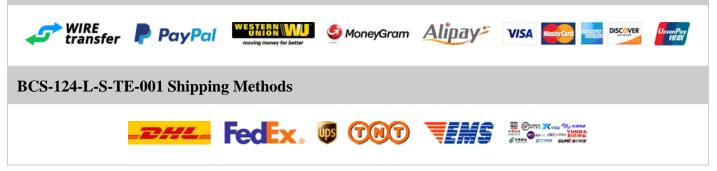

If you have any question about BCS-124-L-S-TE-001, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com