

BCS-126-L-D-DE-019

BCS-126-L-D-DE-019 Information

Heisener.com	Part Number Manufacturer Category Description Package	BCS-126-L-D-DE-019 Samtec Inc. Connectors, Interconnects Rectangular Connectors - Headers, Receptacles, Female Sockets BOX CONNECTOR SOCKET STRIP	
For Reference Only		For the pricing/inventory/lead time, please contact us	
2 51 101010100 Omy		Website: https://www.heisener.com E-mail: salesdept@heisener.com	Request a Quote

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



BCS-126-L-D-DE-019 Specifications

Manufacturer Part NumberBCS-126-L-D-DE-019ManufacturerSamtec Inc.CategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesTiger Clav? BCSConnector TypeReceptacle, Bottom or Top EntryConnector TypeFemale SocketStyleBoard to BoardNumber of Positions52Number of Positions Loaded51Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough HoleTerminationSolderFastening TypeQualOntact Finish - Mating0.010" (2.54mm)Contact Finish - MatingSolderInsulation ColorBlackInsulation Loaded10µin (0.25µm)Contact Finish - MatingColdContact Finish - MatingColdContact Finish - Mating0.100" (3.05µm)Contact Finish - Mating0.290" (7.37mm)Contact Length - Post0.120" (3.05µm)Contact Leng			
CategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesTiger Claw? BCSConnector TypeReceptacle, Bottom or Top EntryContact TypeBoard to BoardStyleBoard to BoardNumber of Positions52Number of Positions Loaded51Number of Rows2Row Spacing - Mating0.100° (2.54mm)Number of Rows2Row Spacing - MatingSolderYout of TypeSolderFreminationSolderFortant TypeSolderContact Finish - MatingGoldContact Finish Thickness - MatingJupin (0.25µm)Insulation ColorBlackInsulation Height0.200° (7.37mm)Contact Length - Post0.102° (3.05mm)Contact Finish ThicknesSolderInsulation Height0.200° (7.37mm)Contact Length - PostSic - 215°C	Manufacturer Part Number	BCS-126-L-D-DE-019	
Image: PackageRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesTiger Claw? BCSConnector TypeReceptacle, Bottom or Top EntryContact TypeFemale SocketStyleBoard to BoardNumber of Positions52Number of Positions Loaded51Pitch - Mating0.100° (2.54mm)Number of Rows2Row Spacing - Mating0.100° (2.54mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.290° (7.37mm)Contact Length - Post0.120° (3.05mm)Contact Funst Forst55° C ~ 125°C	Manufacturer	Samtec Inc.	
Package-SeriesTiger Clav? BCSConnector TypeReceptacle, Bottom or Top EntryContact TypeFemale SocketStyleBoard to BoardNumber of Positions52Number of Positions Loaded51Pitch - Mating0.100° (2.54mm)Number of Rows2Row Spacing - Mating0.100° (2.54mm)Mounting Type0.100° (2.54mm)TerminationSolderFastening TypeVush-PullContact Finish - MatingGoldContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.290° (7.37mm)Contact Length - Post0.120° (3.05mm)Contact Finish Those0.120° (3.05mm)Contact Finish Type0.120° (3.05mm)Contact Finish Type0.120° (3.05mm)Contact Length - Post0.120° (3.05mm)Contact Finish Type0.120° (3.05mm)Contact Finish Type0.120° (3.05mm)Contact Finish Type0.120° (3.05mm)Contact Length - Post0.120° (3.05mm)Contact Finish Type0.120° (3.05mm) </td <td>Category</td> <td>Connectors, Interconnects</td>	Category	Connectors, Interconnects	
SeriesTiger Claw? BCSConnector TypeReceptacle, Bottom or Top EntryContact TypeFemale SocketStyleBoard to BoardNumber of Positions52Number of Positions Loaded51Pitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting Type0.100" (2.54mm)YerminationSolderForeninationSolderForting TypePush-PullContact Finish - MatingGoldContact Finish - MatingIpuin (0.25µm)Insulation ColorBlackInsulation Height0.290" (.37mm)Contact Length - Post0.120" (3.05mm)Operating Temperature-55°C ~ 125°C		Rectangular Connectors - Headers, Receptacles, Female Sockets	
Connector TypeReceptacle, Bottom or Top EntryContact TypeFemale SocketStyleBoard to BoardNumber of Positions52Number of Positions Loaded51Pitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.20" (7.37mm)Contact Length - Post0.102" (3.05mm)Operating Temperature-55°C ~ 125°C	Package	-	
Contact TypeFemale SocketStyleBoard to BoardNumber of Positions52Number of Positions Loaded51Pitch - Mating0.100° (2.54mm)Number of Rows2Row Spacing - Mating0.100° (2.54mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.200° (7.37mm)Contact Length - Post0.100° (3.05mm)Operating Temperature55°C ~ 125°C	Series	Tiger Claw? BCS	
StyleBoard to BoardStyleBoard to BoardNumber of Positions52Number of Positions Loaded51Pitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting Type0.100" (2.54mm)TerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.120" (3.05mm)Operating Temperature-55°C ~ 125°C	Connector Type	Receptacle, Bottom or Top Entry	
Number of Positions 52 Number of Positions Loaded 51 Pitch - Mating 0.100" (2.54mm) Number of Rows 2 Row Spacing - Mating 0.100" (2.54mm) Mounting Type 0.100" (2.54mm) Mounting Type Through Hole Termination Solder Fastening Type Push-Pull Contact Finish - Mating Gold Contact Finish Thickness - Mating 10µin (0.25µm) Insulation Color Black Insulation Height 0.290" (7.37mm) Contact Length - Post 0.102" (3.05mm)	Contact Type	Female Socket	
Number of Positions Loaded51Pitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.120" (3.05mm)Operating Temperature55°C ~ 125°C	Style	Board to Board	
Pitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting Type0.100" (2.54mm)TerminationThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingIupin (0.25µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post55°C ~ 125°C	Number of Positions	52	
Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.120" (3.05mm)Operating Temperature-55°C ~ 125°C	Number of Positions Loaded	51	
Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.120" (3.05mm)Operating Temperature-55°C ~ 125°C	Pitch - Mating	0.100" (2.54mm)	
Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.120" (3.05mm)Operating Temperature-55°C ~ 125°C	Number of Rows	2	
TerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.120" (3.05mm)Operating Temperature-55°C ~ 125°C	Row Spacing - Mating	0.100" (2.54mm)	
Fastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.120" (3.05mm)Operating Temperature-55°C ~ 125°C	Mounting Type	Through Hole	
Contact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.120" (3.05mm)Operating Temperature-55°C ~ 125°C	Termination	Solder	
Contact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.120" (3.05mm)Operating Temperature-55°C ~ 125°C	Fastening Type	Push-Pull	
Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.120" (3.05mm)Operating Temperature-55°C ~ 125°C	Contact Finish - Mating	Gold	
Insulation Height 0.290" (7.37mm) Contact Length - Post 0.120" (3.05mm) Operating Temperature -55°C ~ 125°C	Contact Finish Thickness - Mating	10µin (0.25µm)	
Contact Length - Post 0.120" (3.05mm) Operating Temperature -55°C ~ 125°C	Insulation Color	Black	
Operating Temperature $-55^{\circ}C \sim 125^{\circ}C$	Insulation Height	0.290" (7.37mm)	
	Contact Length - Post	0.120" (3.05mm)	
	Operating Temperature	-55°C ~ 125°C	
Material Flammability Rating UL94 V-0	Material Flammability Rating	UL94 V-0	

Contact Finish - Post	Tin
Mated Stacking Heights	-
Ingress Protection	-
Features	-
	Report errors?

BCS-126-L-D-DE-019 Guarantees



Quality Guarantees


We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

BCS-126-L-D-DE-019 Payment Methods

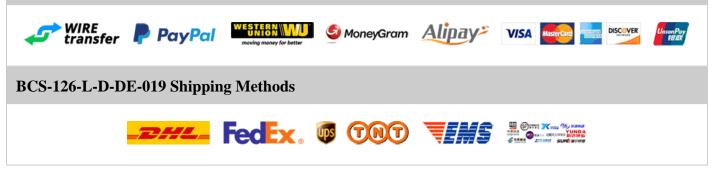

If you have any question about BCS-126-L-D-DE-019, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com