

# BCS-129-L-S-PE-019

#### **BCS-129-L-S-PE-019 Information**

Heisener.com	Manufacturer Category	Connectors, Interconnects Rectangular Connectors - Headers, Receptacles, Female Sockets	
	Description Package	BOX CONNECTOR SOCKET STRIP	11.1111111111111111111111111111111111
For Reference Only	Tuchage	For the pricing/inventory/lead time, please contact us	
For Reference Only		Website: https://www.heisener.com E-mail: salesdept@heisener.com	Request a Quote

## **Certified Quality**

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



# **BCS-129-L-S-PE-019** Specifications

Manufacturer Part NumberBCS-129-L-S-PE-019ManufacturerSamtee Inc.CategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesTiger Clany? BCSContact TypeReceptacle, Pass ThroughContact TypeBoard to BoardStyleBoard to BoardNumber of Positions29Number of Positions Loaded1Number of Rows1Number of Rows1Number of Rows1Strein TypeSolderFerninationSolderStrein TypeSolderContact Finish - MatingGold (254mm)Contact Finish - MatingSolderStrein TypeSolderStrein TypeSolder		
Category Connectors, Interconnects   Rectangular Connectors - Headers, Receptacles, Female Sockets   Package -   Series Tiger Claw? BCS   Connector Type Receptacle, Pass Through   Contact Type Female Socket   Style Board to Board   Number of Positions 29   Number of Positions Loaded 28   Pitch - Mating 0.100° (2.54mm)   Number of Rows 1   Number of Rows 1   Number of Rows 1   Nounting Type Through Hole   Young Type Odd   Young Young Young Young Young Youn	Manufacturer Part Number	BCS-129-L-S-PE-019
Indext Connectors - Headers, Receptacles, Female SocketsPackage-SeriesTiger Claw? BCSConnector TypeReceptacle, Pass ThroughContact TypeBoard DoardStyleBoard to BoardNumber of Positions29Number of Positions Loaded8Number of Rows0.100° (2.54mm)Number of Rows1Row Spacing - Mating-Nouring TypeSolderTerminationSolderFatening TypeSolderContact Finish - MatingGoldContact Finish - MatingGoldStation ColorJun (0.5µm)Station ColorBackInsulation ColorBackInsulation Height0.20° (7.37mm)Contact Funget, SoldJun (3.25mm)Station ForstSolderStation ForstSolderStation ForstSolderStation ColorSolderStation ColorSolderStation ForstSolderStation ForstSolder	Manufacturer	Samtec Inc.
Package-SeriesTiger Claw? BCSConnector TypeReceptacle, Pass ThroughContact TypeFemale SocketStyleBoard to BoardNumber of Positions29Number of Positions Loaded28Pitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderFastening TypeOidContact Finish - MatingGoldContact Finish Thickness - MatingIupin (0.25µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.128" (3.25mm)Operating Temperature-55°C ~ 125°C	Category	Connectors, Interconnects
SeriesTiger Claw? BCSConnector TypeReceptacle, Pass ThroughContact TypeFemale SocketStyleBoard to BoardNumber of Positions29Number of Positions Loaded28Pitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleYounder TiminationSolderContact Finish - Mating0.104" (2.5µm)Contact Finish - MatingGoldStatening TypeInfun (0.5µm)Statening TypeBiakContact Finish Thickness - MatingBiackInsulation ColorJoy" (7.37mm)Contact Length - Post0.128" (3.25mn)Operating Temperature-55° < 125°C		Rectangular Connectors - Headers, Receptacles, Female Sockets
Connector Type Receptacle, Pass Through   Contact Type Female Socket   Style Board to Board   Number of Positions 29   Number of Positions Loaded 28   Pitch - Mating 0.100° (2.54mm)   Number of Rows 1   Row Spacing - Mating -   Mounting Type Through Hole   Termination Solder   Contact Finish - Mating Gold   Contact Finish Thickness - Mating Gold   Insulation Color Black   Insulation Height 0.290° (7.37mm)   Contact Length - Post 0.128° (3.25mn)	Package	-
Contact TypeFemale SocketStyleBoard to BoardNumber of Positions29Number of Positions Loaded28Pitch - Mating0.100° (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - Mating0.10µí (0.25µm)Insulation ColorBlackInsulation Height0.290° (7.37mm)Contact Length - Post0.128° (3.25mm)Operating Temperature-55°C ~ 125°C	Series	Tiger Claw? BCS
StyleBoard to BoardStyleBoard to BoardNumber of Positions29Number of Positions Loaded28Pitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingIupin (0.25µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post55°C ~ 125°C	Connector Type	Receptacle, Pass Through
Number of Positions 29   Number of Positions Loaded 28   Pitch - Mating 0.100" (2.54mm)   Number of Rows 1   Row Spacing - Mating -   Mounting Type Through Hole   Termination Solder   Fastening Type Push-Pull   Contact Finish - Mating Gold   Contact Finish Thickness - Mating Jupin (0.25µm)   Insulation Color Black   Insulation Height 0.290" (7.37mm)   Ocntact Length - Post 0.128" (3.25mm)	Contact Type	Female Socket
Number of Positions Loaded28Pitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingIlpuin (0.25µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.128" (3.25mm)Operating Temperature-55°C ~ 125°C	Style	Board to Board
Pitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingBlackInsulation Color0.290" (7.37mm)Contact Length - Post0.128" (3.25mm)Operating Temperature55°C ~ 125°C	Number of Positions	29
Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.128" (3.25mm)Operating Temperature-55°C ~ 125°C	Number of Positions Loaded	28
Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingI/uin (0.25µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.128" (3.25mm)Operating Temperature-55°C ~ 125°C	Pitch - Mating	0.100" (2.54mm)
Mounting TypeThrough HoleMounting TypeSolderTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.128" (3.25mm)Operating Temperature-55°C ~ 125°C	Number of Rows	1
TerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.128" (3.25mm)Operating Temperature-55°C ~ 125°C	Row Spacing - Mating	-
Fastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.128" (3.25mm)Operating Temperature-55°C ~ 125°C	Mounting Type	Through Hole
Contact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.128" (3.25mm)Operating Temperature-55°C ~ 125°C	Termination	Solder
Contact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.128" (3.25mm)Operating Temperature-55°C ~ 125°C	Fastening Type	Push-Pull
Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.128" (3.25mm)Operating Temperature-55°C ~ 125°C	Contact Finish - Mating	Gold
Insulation Height0.290" (7.37mm)Contact Length - Post0.128" (3.25mm)Operating Temperature-55°C ~ 125°C	Contact Finish Thickness - Mating	10µin (0.25µm)
Contact Length - Post0.128" (3.25mm)Operating Temperature-55°C ~ 125°C	Insulation Color	Black
Operating Temperature $-55^{\circ}C \sim 125^{\circ}C$	Insulation Height	0.290" (7.37mm)
	Contact Length - Post	0.128" (3.25mm)
Material Flammability Rating UL94 V-0	Operating Temperature	-55°C ~ 125°C
	Material Flammability Rating	UL94 V-0

Contact Finish - Post	Tin
Mated Stacking Heights	-
Ingress Protection	-
Features	-
	Report errors?

## BCS-129-L-S-PE-019 Guarantees



#### **Quality Guarantees**


We provide 90 days warranty. \* If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



#### **Service Guarantees**

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

## BCS-129-L-S-PE-019 Payment Methods

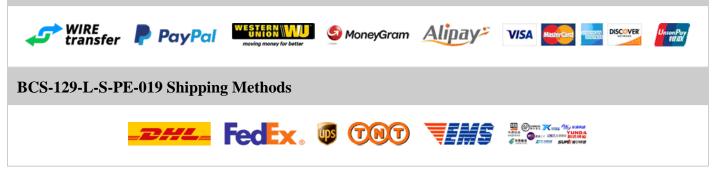

If you have any question about BCS-129-L-S-PE-019, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com