

BCS-130-L-D-DE-031

BCS-130-L-D-DE-031 Information

Heisener.com	Part Number Manufacturer Category Description Package	BCS-130-L-D-DE-031 Samtec Inc. Connectors, Interconnects Rectangular Connectors - Headers, Receptacles, Female Sockets BOX CONNECTOR SOCKET STRIP	
For Reference Only	-	For the pricing/inventory/lead time, please contact us Website: https://www.heisener.com	Request a Quote

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



BCS-130-L-D-DE-031 Specifications

ManufacturerSamtec Inc.CategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesTiger Claw? BCSConnector TypeReceptacle, Bottom or Top EntryContact TypeBoard to BoardSyleBoard to BoardNumber of Positions60Number of Positions Loaded59Pitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough HoleFreminationSolderForsteining TypeOldContact Finish - MatingGoldContact Finish - MatingIopin (0.25µm)Insulation ColorBackInsulation Finish Thickness - MatingJouin (0.25µm)Insulation Height0.209" (7.37mm)Contact Length - Post0.102" (3.05mm)		
CategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesTiger Claw? BCSConnector TypeReceptacle, Bottom or Top EntryContact TypeBoard to BoardStyleBoard to BoardNumber of Positions60Number of Positions Loaded9Pitch - Mating0.100"(2.54mm)Number of Rows2Row Spacing - Mating0.100"(2.54mm)Mounting TypeInough HoleForminationSolderFastening TypeUsh-PullContact Finish - MatingGoldIonat Erinish - MatingGoldIonator ColorBackInsulation ColorBackInsulation Height0.20"(7.37mm)Ionat Length - Post0.102"(3.05mm)	Manufacturer Part Number	BCS-130-L-D-DE-031
Icctangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesTiger Claw? BCSConnector TypeReceptacle, Bottom or Top EntryContact TypeFemale SocketStyleBoard to BoardNumber of Positions60Number of Positions Loaded9Pitch - Mating0.100° (2.54mm)Number of Rows2Row Spacing - Mating0.100° (2.54mm)Mounting Type0.100° (2.54mm)Younding TypeSolderFerninationSolderFortart Finish - MatingGoldContact Finish - MatingGoldContact Finish - MatingGoldInsulation ColorBlackInsulation Finish - Mating0.200° (7.37mm)Contact Finish - Post0.120° (3.05mm)	Manufacturer	Samtec Inc.
Package-SeriesTiger Clav? BCSConnector TypeReceptacle, Bottom or Top EntryContact TypeFemale SocketStyleBoard to BoardNumber of Positions60Number of Positions Loaded59Pitch - Mating0.100° (2.54mm)Number of Rows2Row Spacing - Mating0.100° (2.54mm)Mounting Type0.100° (2.54mm)TorninationSolderFreminationSolderFastening TypeOldContact Finish - MatingGoldContact Finish - MatingInju (0.25µm)Insulation ColorBlackInsulation Height0.290° (7.37mm)Contact Length - Post0.120° (3.05mm)	Category	Connectors, Interconnects
SeriesTiger Claw? BCSConnector TypeReceptacle, Bottom or Top EntryContact TypeFemale SocketStyleBoard to BoardNumber of Positions60Number of Positions Loaded59Pitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough HoleFastening TypeSolderContact Finish - MatingGoldContact Finish - MatingGoldInsulation ColorBackInsulation Height0.20" (3.05mm)Contact Length - Post0.102" (3.05mm)		Rectangular Connectors - Headers, Receptacles, Female Sockets
Connector TypeReceptacle, Bottom or Top EntryContact TypeFemale SocketStyleBoard to BoardNumber of Positions60Number of Positions Loaded59Pitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough HoleTerminationSolderFastening TypeQuin (0.25µm)Contact Finish - MatingGoldContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.200" (7.37mm)Contact Length - Post0.120" (3.05mm)	Package	-
Contact TypeFemale SocketStyleBoard to BoardNumber of Positions60Number of Positions Loaded59Pitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting Type0.100" (2.54mm)FareninationSolderFastening Type9ush-PullContact Finish - MatingGoldInsulation ColorBlackInsulation Fleight0.200" (3.5mm)Contact Length - Post0.102" (3.05mm)	Series	Tiger Claw? BCS
StyleBoard to BoardStyleBoard to BoardNumber of Positions60Number of Positions Loaded59Pitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.120" (3.05mm)	Connector Type	Receptacle, Bottom or Top Entry
Number of Positions60Number of Positions Loaded59Pitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.102" (3.05mm)	Contact Type	Female Socket
Number of Positions Loaded59Pitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.120" (3.05mm)	Style	Board to Board
Pitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting Type0.100" (2.54mm)TerminationSolderFastening Type9ksh-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.120" (3.05mm)	Number of Positions	60
Number of Rows2Number of Rows0.100" (2.54mm)Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.120" (3.05mm)	Number of Positions Loaded	59
Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.120" (3.05mm)	Pitch - Mating	0.100" (2.54mm)
Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.120" (3.05mm)	Number of Rows	2
TerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.120" (3.05mm)	Row Spacing - Mating	0.100" (2.54mm)
Fastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.120" (3.05mm)	Mounting Type	Through Hole
Contact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.120" (3.05mm)	Termination	Solder
Contact Finish Thickness - Mating10μin (0.25μm)Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.120" (3.05mm)	Fastening Type	Push-Pull
Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.120" (3.05mm)	Contact Finish - Mating	Gold
Insulation Height0.290" (7.37mm)Contact Length - Post0.120" (3.05mm)	Contact Finish Thickness - Mating	10μin (0.25μm)
Contact Length - Post 0.120" (3.05mm)	Insulation Color	Black
	Insulation Height	0.290" (7.37mm)
Operating Temperature -55° C $\sim 125^{\circ}$ C	Contact Length - Post	0.120" (3.05mm)
operating reinperature 55 C 125 C	Operating Temperature	-55°C ~ 125°C
Material Flammability Rating UL94 V-0	Material Flammability Rating	UL94 V-0

Contact Finish - Post	Tin
Mated Stacking Heights	-
Ingress Protection	-
Features	-
	Report errors?

BCS-130-L-D-DE-031 Guarantees



Quality Guarantees


We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

BCS-130-L-D-DE-031 Payment Methods

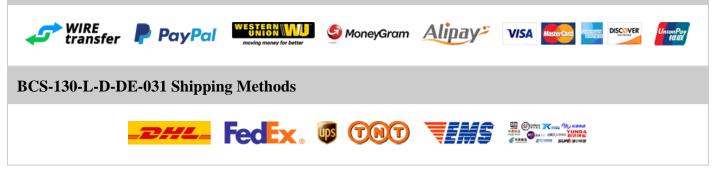

If you have any question about BCS-130-L-D-DE-031, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com