

BCS-132-L-S-HE-026

BCS-132-L-S-HE-026 Information

	Part Number Manufacturer Category	BCS-132-L-S-HE-026 Samtec Inc. Connectors, Interconnects	
Heisener.com		Rectangular Connectors - Headers, Receptacles, Female Sockets	
	Description	BOX CONNECTOR SOCKET STRIP	- 350H23
	Package	-	
		For the pricing/inventory/lead time, please contact	
For Reference Only		us Website: https://www.heisener.com E-mail: salesdept@heisener.com	Request a Quote

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



BCS-132-L-S-HE-026 Specifications

Manufacturer Part NumberBCS-132-L-S-HE-026ManufacturerSamtee Inc.CategoryConnectors, InterconnectsPackage-SeriesTiger Connectors - Headers, Receptacles, Female SocketsPonctor TypeReceptacles, Second SocketContact TypeReceptacleSoriesGoard to BoardNumber of PositionsSaNumber of Positions Loaded1Number of Positions Loaded1Number of Rows1Number of Rows1Number of RowsSolderFerninationSolderForninationSolderSteining TypeSolderContact Finish - MatingGoldOtact Finish - MatingGoldContact Finish - MatingSolderFatening TypeSolderContact Finish - MatingGoldContact Finish - MatingJuin (0.5µm)Contact Finish TypeJuin (0.5µm)Contact Finish - MatingJuin (0.7µmn)Contact Finish - MatingJuin (0.7µmn)Contact Finish Finish FinishJuin (0.10° (0.5µm)Contact Finish - MatingJuin (0.7µmn)Contact Finish Finish FinishJuin (0.10° (0.5µm)Contact Finish Finish FinishJuin (0.10° (0.5µm)Contact Finish Finish FinishJuin (0.10° (0.5µm)Contact Finish Finish Finish <th></th> <th></th>		
Category Connectors, Interconnects Rectangular Connectors - Headers, Receptacles, Female Sockets Package - Series Tiger Claw? BCS Connector Type Receptacle Contact Type Female Socket Style Board to Board Number of Positions 32 Number of Positions Loaded 31 Number of Rows 1 Number of Rows 1 Number of Rows 1 Number of Rows 1 Notering Type Pricely Hole, Right Angle Nouting Type Odd Year Solder Fastening Type Odd Contact Finish Huting Olpin (0.25µm) Insulation Color Black Insulation Height 0.100" (2.79mm) Insulation Height 0.101" (2.79mm)	Manufacturer Part Number	BCS-132-L-S-HE-026
Ackage-SeriesTiger Claw? BCSConnector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions32Number of Positions Loaded31Pitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough Hole, Right AngleFerminationSolderForstinish - Mating0.010"Ontact Finish - MatingGoldForstinish - MatingGoldForstinish - MatingGoldForstinish - MatingGoldForstinish - MatingGoldForstinish - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.110" (2.79mm)Contact Finish - Post0.125" (3.18mm)Forstini - Forstinish - Solder55° C~ 125°C	Manufacturer	Samtec Inc.
Package-SeriesTiger Claw? BCSConnector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions32Number of Positions Loaded31Pitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough Hole, Right AngleTerminationSolderFastening TypePush-PullContact Finish - Mating10µún (0.5µm)Insulation ColorBlackInsulation Height0.110" (2.79mm)Contact Length - Post0.125" (3.18mm)Operating Temperature-55°C ~ 125°C	Category	Connectors, Interconnects
SeriesTiger Claw? BCSConnector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions32Number of Positions Loaded31Pitch - Mating0.100° (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough Hole, Right AngleTerminationSolderContact Finish - MatingGoldContact Finish - MatingIpi (0.25µm)Contact Finish - MatingGoldInsulation ColorBlackInsulation Height0.110° (2.79mm)Contact Length - Post0.125° (3.18mn)Contact Finish Finicknes55° C~ 125°C		Rectangular Connectors - Headers, Receptacles, Female Sockets
Connector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions32Number of Positions Loaded31Pitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough Hole, Right AngleTerminationSolderContact Finish - MatingGoldContact Finish Thickness - MatingIupin (0.25µm)Insulation ColorBlackInsulation Height0.101" (2.79mm)Contact Length - Post0.125" (3.18mm)Operating Temperature 55° C~ 125°C	Package	-
Contact TypeFemale SocketStyleBoard to BoardNumber of Positions32Number of Positions Loaded31Pitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough Hole, Right AngleTerminationSolderFastening TypePush-PullContact Finish - Mating0.10µin (0.25µm)Insulation ColorBlackInsulation Height0.110" (2.79mm)Contact Length - Post0.125" (3.18mm)Operating Temperature-55°C ~ 125°C	Series	Tiger Claw? BCS
StyleBoard to BoardStyleBoard to BoardNumber of Positions32Number of Positions Loaded31Pitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough Hole, Right AngleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.110" (2.79mm)Contact Length - Post0.125" (3.18mm)Operating Temperature-55°C ~ 125°C	Connector Type	Receptacle
Number of Positions32Number of Positions Loaded31Pitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough Hole, Right AngleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.110" (2.79mm)Contact Length - Post0.125" (3.18mm)Operating Temperature-55°C ~ 125°C	Contact Type	Female Socket
Number of Positions Loaded31Pitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough Hole, Right AngleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingIlpuin (0.25µm)Insulation ColorBlackInsulation Height0.110" (2.79mm)Contact Length - Post0.125" (3.18mm)Operating Temperature-55°C ~ 125°C	Style	Board to Board
Pitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough Hole, Right AngleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingIlquin (0.25µm)Insulation ColorBlackInsulation Height0.110" (2.79mm)Contact Length - Post0.125" (3.18mm)Operating Temperature55°C ~ 125°C	Number of Positions	32
Number of Rows1Row Spacing - Mating-Mounting TypeThrough Hole, Right AngleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.110" (2.79mm)Contact Length - Post0.125" (3.18mm)Operating Temperature-55°C ~ 125°C	Number of Positions Loaded	31
Row Spacing - Mating-Mounting TypeThrough Hole, Right AngleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingI/upin (0.25µm)Insulation ColorBlackInsulation Height0.110" (2.79mm)Contact Length - Post0.125" (3.18mm)Operating Temperature55°C ~ 125°C	Pitch - Mating	0.100" (2.54mm)
Mounting TypeThrough Hole, Right AngleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.110" (2.79mm)Contact Length - Post0.125" (3.18mm)Operating Temperature-55°C ~ 125°C	Number of Rows	1
TerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10μin (0.25μm)Insulation ColorBlackInsulation Height0.110" (2.79mm)Contact Length - Post0.125" (3.18mm)Operating Temperature-55°C ~ 125°C	Row Spacing - Mating	-
Fastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10μin (0.25μm)Insulation ColorBlackInsulation Height0.110" (2.79mm)Contact Length - Post0.125" (3.18mm)Operating Temperature-55°C ~ 125°C	Mounting Type	Through Hole, Right Angle
Contact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.110" (2.79mm)Contact Length - Post0.125" (3.18mm)Operating Temperature-55°C ~ 125°C	Termination	Solder
Contact Finish Thickness - Mating10μin (0.25μm)Insulation ColorBlackInsulation Height0.110" (2.79mm)Contact Length - Post0.125" (3.18mm)Operating Temperature-55°C ~ 125°C	Fastening Type	Push-Pull
Insulation ColorBlackInsulation Height0.110" (2.79mm)Contact Length - Post0.125" (3.18mm)Operating Temperature-55°C ~ 125°C	Contact Finish - Mating	Gold
Insulation Height0.110" (2.79mm)Contact Length - Post0.125" (3.18mm)Operating Temperature-55°C ~ 125°C	Contact Finish Thickness - Mating	10μin (0.25μm)
Contact Length - Post0.125" (3.18mm)Operating Temperature-55°C ~ 125°C	Insulation Color	Black
Operating Temperature $-55^{\circ}C \sim 125^{\circ}C$	Insulation Height	0.110" (2.79mm)
	Contact Length - Post	0.125" (3.18mm)
Material Flammability Rating UL94 V-0	Operating Temperature	-55°C ~ 125°C
	Material Flammability Rating	UL94 V-0

Contact Finish - Post	Tin
Mated Stacking Heights	-
Ingress Protection	-
Features	-
	Report errors?

BCS-132-L-S-HE-026 Guarantees



Quality Guarantees


We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

BCS-132-L-S-HE-026 Payment Methods

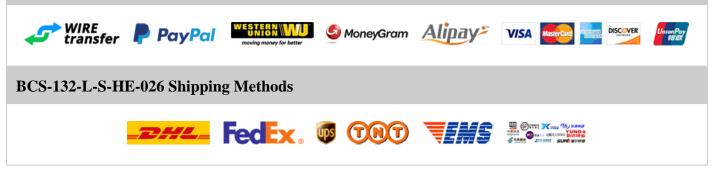

If you have any question about BCS-132-L-S-HE-026, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com