

BCS-134-L-D-PE-BE

BCS-134-L-D-PE-BE Information



Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



BCS-134-L-D-PE-BE Specifications

Manufacturer Part NumberBCS-134-L-D-PE-BEManufacturerSamtec Inc.CategoryConnectors, InterconnectsPackage-SeriesTiger Claw? BCSConnector TypeReceptacle, Pass ThroughContact TypeFemale SocketStyleBoard to BoardNumber of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - MatingSolderMounting TypeThrough HoleContact Finish - MatingGoldContact Finish Thickness - MatingJour (0.25µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - PostJ128" (3.25mm)		
CategoryConnectors, Interconnects Rectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesTiger Claw? BCSConnector TypeReceptacle, Pass ThroughContact TypeBoard to BoardStyleBoard to BoardNumber of Positions68Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough HoleTerminationSolderFastening TypeQualContact Finish - MatingGoldContact Finish - Mating0.100" (2.54mn)Insulation ColorBlackInsulation Finish - MatingOldContact Finish - Mating0.200" (7.37mm)Insulation Height0.290" (7.37mm)	Manufacturer Part Number	BCS-134-L-D-PE-BE
ImageRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesTiger Claw? BCSConnector TypeReceptacle, Pass ThroughContact TypeFemale SocketStyleBoard to BoardNumber of Positions68Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeDiolo" (2.54mm)Young HoleSolderTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingIpi(in (0.25µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.128" (3.25mm)	Manufacturer	Samtec Inc.
Package-SeriesTiger Claw? BCSConnector TypeReceptacle, Pass ThroughContact TypeFemale SocketStyleBoard to BoardNumber of Positions68Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough HoleTerminationSolderFastening TypeQuidContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.200" (7.37mm)Contact Length - Post0.128" (3.25mm)	Category	Connectors, Interconnects
SeriesTiger Claw? BCSConnector TypeReceptacle, Pass ThroughContact TypeFemale SocketStyleBoard to BoardNumber of Positions68Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough HoleTerminationSolderFastening TypeQui do Logum)Contact Finish - MatingGoldContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.128" (3.25mm)		Rectangular Connectors - Headers, Receptacles, Female Sockets
Connector TypeReceptacle, Pass ThroughContact TypeFemale SocketStyleBoard to BoardNumber of Positions68Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough HoleTerminationSolderFastening TypeQuin (0.25µm)Contact Finish - MatingGoldContact Finish - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.128" (3.25mm)	Package	-
Contact TypeFemale SocketStyleBoard to BoardNumber of Positions68Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeOnton" (2.54mm)TerminationSolderFastening TypePush-PullContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.128" (3.25mm)	Series	Tiger Claw? BCS
StyleBoard to BoardNumber of Positions68Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting Type0.100" (2.54mm)TerminationSolderFastening TypePush-PullContact Finish - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.128" (3.25mm)	Connector Type	Receptacle, Pass Through
Number of Positions68Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.128" (3.25mm)	Contact Type	Female Socket
Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.128" (3.25mm)	Style	Board to Board
Pitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.128" (3.25mm)	Number of Positions	68
Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.128" (3.25mm)	Number of Positions Loaded	All
Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.128" (3.25mm)	Pitch - Mating	0.100" (2.54mm)
Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.128" (3.25mm)	Number of Rows	2
TerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.128" (3.25mm)	Row Spacing - Mating	0.100" (2.54mm)
Fastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.128" (3.25mm)	Mounting Type	Through Hole
Contact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.128" (3.25mm)	Termination	Solder
Contact Finish Thickness - Mating10μin (0.25μm)Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.128" (3.25mm)	Fastening Type	Push-Pull
Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.128" (3.25mm)	Contact Finish - Mating	Gold
Insulation Height0.290" (7.37mm)Contact Length - Post0.128" (3.25mm)	Contact Finish Thickness - Mating	10μin (0.25μm)
Contact Length - Post 0.128" (3.25mm)	Insulation Color	Black
	Insulation Height	0.290" (7.37mm)
	Contact Length - Post	0.128" (3.25mm)
Operating Temperature $-55^{\circ}\text{C} \sim 125^{\circ}\text{C}$	Operating Temperature	-55°C ~ 125°C
Material Flammability Rating UL94 V-0	Material Flammability Rating	UL94 V-0

Contact Finish - Post	Tin
Mated Stacking Heights	-
Ingress Protection	-
Features	-
	Report errors?

BCS-134-L-D-PE-BE Guarantees



Quality Guarantees


We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

BCS-134-L-D-PE-BE Payment Methods

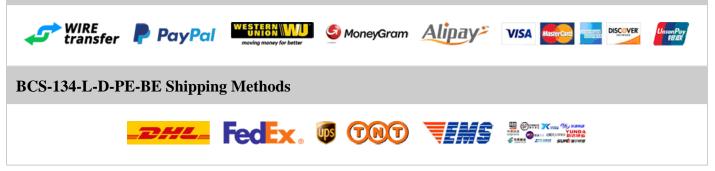

If you have any question about BCS-134-L-D-PE-BE, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com