

BCS-135-L-D-PE-033

BCS-135-L-D-PE-033 Information

Heisener.com	Part Number Manufacturer Category Description Package			
For Reference Only		For the pricing/inventory/lead time, please contact us		
Tor Kelerence Only		Website: https://www.heisener.com E-mail: salesdept@heisener.com	Request a Quote	

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



BCS-135-L-D-PE-033 Specifications

Manufacturer Part Number	BCS-135-L-D-PE-033		
Manufacturer	Samtec Inc.		
Category	Connectors, Interconnects		
	Rectangular Connectors - Headers, Receptacles, Female Sockets		
Package	-		
Series	Tiger Claw? BCS		
Connector Type	Receptacle, Pass Through		
Contact Type	Female Socket		
Style	Board to Board		
Number of Positions	70		
Number of Positions Loaded	69		
Pitch - Mating	0.100" (2.54mm)		
Number of Rows	2		
Row Spacing - Mating	0.100" (2.54mm)		
Mounting Type	Through Hole		
Termination	Solder		
Fastening Type	Push-Pull		
Contact Finish - Mating	Gold		
Contact Finish Thickness - Mating	10µin (0.25µm)		
Insulation Color	Black		
Insulation Height	0.290" (7.37mm)		
Contact Length - Post	0.128" (3.25mm)		
Operating Temperature	-55°C ~ 125°C		
Material Flammability Rating	UL94 V-0		

Contact Finish - Post	Tin		
Mated Stacking Heights	-		
Ingress Protection	-		
Features	-		
		Report	errors?

BCS-135-L-D-PE-033 Guarantees



Quality Guarantees


We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

BCS-135-L-D-PE-033 Payment Methods

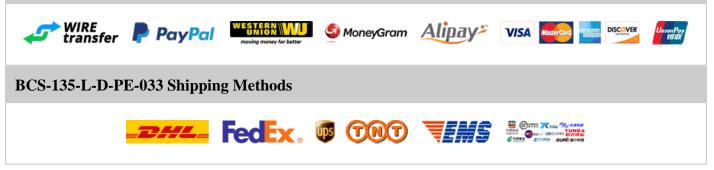

If you have any question about BCS-135-L-D-PE-033, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com