

BCS-135-L-S-PE-021

BCS-135-L-S-PE-021 Information

Heisener.com	Part Number Manufacturer	BCS-135-L-S-PE-021	
	Category	Connectors, Interconnects Rectangular Connectors - Headers, Receptacles, Female Sockets	
	Description Package	BOX CONNECTOR SOCKET STRIP	通常が発
For Reference Only	-	For the pricing/inventory/lead time, please contact us Website: https://www.heisener.com E-mail: salesdept@heisener.com	Request a Quote

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



BCS-135-L-S-PE-021 Specifications

Manufacturer Part NumberBCS-135-L-S-PE-021ManufacturerSamtec Inc.CategoryConnectors, Interconnects Rectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesTiger Claw? BCSConnector TypeReceptacle, Pass ThroughConnector TypeFemale SocketStyleBoard to BoardNumber of Positions Loaded34Pitch - Mating0.100" (2.54mm)Number of Rows1Receptacle Pase InformationSolderTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish - MatingOujun (0.52µm)Insulation ColorBlackInsulation Leight0.200" (7.37mm)Contact Leight - Post0.128" (3.25mm)Material Elamonability PartingUlu M.0		
CategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesTiger Claw? BCSConnector TypeReceptacle, Pass ThroughContact TypeBoard to BoardStyleBoard to BoardNumber of Positions35Number of Positions Loaded1Number of Rows1Number of Rows1Number of Rows1Number of RowsSolderYerminationSolderStort TypeSolderStort TypeInfougationsNouting TypeGoldContact Finish - MatingJouin (0.5µm)Stort of Finish - MatingSolderStort of Stort Stort StortSolderStort of Finish - MatingSolderStort of Stort Sto	Manufacturer Part Number	BCS-135-L-S-PE-021
Ackage.SeriesTiger Claw? BCSConnector TypeReceptacle, Pass ThroughContact TypeFemale SocketStyleBoard to BoardNumber of Positions35Number of Positions Loaded34Pitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - MatingSolderMounting TypeThrough HoleTerminationSolderFastening TypeQualOtact Finish - MatingGoldContact Finish Thickness - MatingIupin (0.25µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.128" (3.25mm)Operating Temperature-55°C ~ 125°C	Manufacturer	Samtec Inc.
Package.SeriesTiger Claw? BCSConnector TypeReceptacle, Pass ThroughContact TypeFemale SocketStyleBoard to BoardNumber of Positions35Number of Positions Loaded4Pitch - Mating0.100° (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypePincup HoleTerminationSolderFastening TypeUsh-PullContact Finish - MatingGoldContact Finish Thickness - MatingIojin (0.25µm)Insulation ColorBackInsulation Height0.290° (7.37mm)Contact Length - Post0.128° (3.25mm)Contact Funsh ThicknessSolderStation TypeSolderStation TypeSolderContact Finish Thickness - MatingSolderStation TypeSolderStation TypeSolder<	Category	Connectors, Interconnects
SeriesTiger Clav? BCSConnector TypeReceptacle, Pass ThroughContact TypeFemale SocketStyleBoard to BoardNumber of Positions35Number of Positions Loaded34Pitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleYerminationSolderFastening TypeOldContact Finish - MatingGoldContact Finish - MatingIpin (0.25µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.128" (3.25mm)Operating Temperature-55°C ~ 125°C		Rectangular Connectors - Headers, Receptacles, Female Sockets
Connector TypeReceptacle, Pass ThroughContact TypeFemale SocketStyleBoard to BoardNumber of Positions35Number of Positions Loaded34Pitch - Mating0.100° (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleFerminationSolderFortact Finish - MatingGoldContact Finish - MatingIoluin (0.25µm)Insulation ColorBackInsulation Height0.20° (7.37mm)Contact Length - Post0.128° (3.25mm)Operating Temperature-55° C~ 125°C	Package	-
Contact TypeFemale SocketStyleBoard to BoardNumber of Positions35Number of Positions Loaded34Pitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.128" (3.25mm)Operating Temperature-55°C ~ 125°C	Series	Tiger Claw? BCS
StyleBoard to BoardStyleBoard to BoardNumber of Positions35Number of Positions Loaded34Pitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.128" (3.25mm)Operating Temperature-55°C ~ 125°C	Connector Type	Receptacle, Pass Through
Number of Positions 35 Number of Positions Loaded 34 Pitch - Mating 0.100" (2.54mm) Number of Rows 1 Row Spacing - Mating - Mounting Type Through Hole Termination Solder Fastening Type Push-Pull Contact Finish - Mating Gold Contact Finish Thickness - Mating Jupin (0.25µm) Insulation Color Black Insulation Height 0.290" (7.37mm) Operating Temperature -55°C ~ 125°C	Contact Type	Female Socket
Number of Positions Loaded34Pitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingIlpuin (0.25µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post55°C ~ 125°C	Style	Board to Board
Pitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingIupin (0.25µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post55°C ~ 125°C	Number of Positions	35
Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.128" (3.25mm)Operating Temperature-55°C ~ 125°C	Number of Positions Loaded	34
Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingIupin (0.25µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.128" (3.25mm)Operating Temperature-55°C ~ 125°C	Pitch - Mating	0.100" (2.54mm)
Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.128" (3.25mm)Operating Temperature-55°C ~ 125°C	Number of Rows	1
TerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.128" (3.25mm)Operating Temperature-55°C ~ 125°C	Row Spacing - Mating	-
Fastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.128" (3.25mm)Operating Temperature-55°C ~ 125°C	Mounting Type	Through Hole
Contact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.128" (3.25mm)Operating Temperature-55°C ~ 125°C	Termination	Solder
Contact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.128" (3.25mm)Operating Temperature-55°C ~ 125°C	Fastening Type	Push-Pull
Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.128" (3.25mm)Operating Temperature-55°C ~ 125°C	Contact Finish - Mating	Gold
Insulation Height 0.290" (7.37mm) Contact Length - Post 0.128" (3.25mm) Operating Temperature -55°C ~ 125°C	Contact Finish Thickness - Mating	10µin (0.25µm)
Contact Length - Post0.128" (3.25mm)Operating Temperature-55°C ~ 125°C	Insulation Color	Black
Operating Temperature $-55^{\circ}C \sim 125^{\circ}C$	Insulation Height	0.290" (7.37mm)
	Contact Length - Post	0.128" (3.25mm)
Material Flammability Rating LII 94 V-0	Operating Temperature	-55°C ~ 125°C
	Material Flammability Rating	UL94 V-0

Contact Finish - Post	Tin
Mated Stacking Heights	-
Ingress Protection	-
Features	-
	Report errors?

BCS-135-L-S-PE-021 Guarantees



Quality Guarantees


We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

BCS-135-L-S-PE-021 Payment Methods

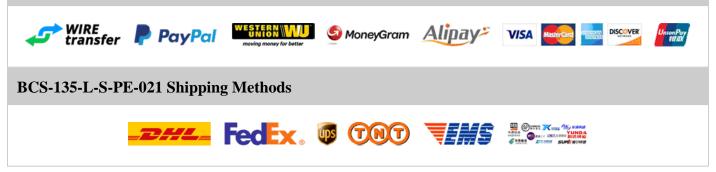

If you have any question about BCS-135-L-S-PE-021, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com