

BCS-136-L-D-DE-018

BCS-136-L-D-DE-018 Information

Heisener.com	Part Number Manufacturer	BCS-136-L-D-DE-018	
	Manufacturer		TELEVISION FOR
	Category	Connectors, Interconnects Rectangular Connectors - Headers, Receptacles, Female Sockets	
	Description	BOX CONNECTOR SOCKET STRIP	25,314,223
	Package	-	同药浸炭
For Reference Only		For the pricing/inventory/lead time, please contact	
		us Website: https://www.heisener.com E-mail: salesdept@heisener.com	Request a Quote

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



BCS-136-L-D-DE-018 Specifications

Manufacturer Part NumberBCS-136-L-D-DE-018ManufacturerSamtec Inc.CategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesTiger Claw? BCSConnector TypeReceptacle, Bottom or Top EntryContact TypeBoard to BoardStyleBoard to BoardNumber of Positions Loaded71Pitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough HoleFastening TypeQoldContact Finish Thickness - MatingGoldContact Finish Thickness - Mating10µin (0.5µm)Insulation Height0.290" (7.37mm)Contact Length - Post0.102" (3.05mm)Contact Length - Post0.5°C - 125°C		
CategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesTiger Claw? BCSConnector TypeReceptacle, Bottom or Top EntryContact TypeBoard to BoardStyleBoard to BoardNumber of Positions72Number of Positions Loaded1Number of Rows2Row Spacing - Mating0.100° (2.54mm)Number of Rows0.100° (2.54mm)Number of Rows0.100° (2.54mm)Row Spacing - Mating0.100° (2.54mm)Mounting TypeThrough HoleFarteninationSolderForstening TypeOsderContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.200° (7.37mm)Contact Length - Post0.120° (3.05mm)	Manufacturer Part Number	BCS-136-L-D-DE-018
Icetanguar Connectors - Headers, Receptacles, Female SocketsPackage-SeriesTiger Clav? BCSConnector TypeReceptacle, Bottom or Top EntryContact TypeBoard to BoardStyleBoard to BoardNumber of Positions72Number of Positions Loaded1Pich - Mating0.100° (2.54mm)Number of Rows2Rows Spacing - Mating0.100° (2.54mm)Number of Rows0.100° (2.54mm)Number of Rows0.100° (2.54mm)Pich - Mating0.100° (2.54mm)Number of Rows0.100° (2.54mm	Manufacturer	Samtec Inc.
Package-SeriesTiger Clav? BCSConnector TypeReceptacle, Bottom or Top EntryContact TypeFemale SocketStyleBoard to BoardNumber of Positions72Number of Positions Loaded71Pitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting Type0.100" (2.54mm)Young Type0.100" (2.54mm)ForminationSolderForminationSolderContact Finish - MatingOidContact Finish - MatingGoldContact Finish - MatingIpin (0.25µm)Insulation ColorBlackInsulation Height0.200" (7.37mm)Contact Length - Post0.120" (3.05mm)	Category	Connectors, Interconnects
SeriesTiger Claw? BCSConnector TypeReceptacle, Bottom or Top EntryContact TypeFemale SocketStyleBoard to BoardNumber of Positions72Number of Positions Loaded71Pitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough HoleFartminationSolderFastening TypeOldContact Finish - MatingGoldContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.20" (3.05mm)Contact Length - Post0.120" (3.05mm)		Rectangular Connectors - Headers, Receptacles, Female Sockets
Connector TypeReceptacle, Bottom or Top EntryContact TypeFemale SocketStyleBoard to BoardNumber of Positions72Number of Positions Loaded71Pitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough HoleTerminationSolderContact Finish - MatingGoldContact Finish - MatingInjuni (0.25µm)Insulation ColorBlackInsulation Height0.200" (7.37mm)Contact Length - Post0.120" (3.05mm)	Package	-
Contact TypeFemale SocketStyleBoard to BoardNumber of Positions72Number of Positions Loaded1Pitch - Mating0.100° (2.54mm)Number of Rows2Row Spacing - Mating0.100° (2.54mm)Mounting Type0.100° (2.54mm)TerminationSolderFastening Type9ush-PullContact Finish - MatingGoldInductor SpaceJupin (0.25µm)Insulation ColorBlackInsulation Height0.20° (7.37mm)Contact Length - Post0.120° (3.05mm)	Series	Tiger Claw? BCS
StyleBoard to BoardStyleBoard to BoardNumber of Positions72Number of Positions Loaded71Pitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting Type0.100" (2.54mm)TerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.200" (7.37mm)Contact Length - Post0.120" (3.05mm)	Connector Type	Receptacle, Bottom or Top Entry
Number of Positions 72 Number of Positions Loaded 71 Pitch - Mating 0.100" (2.54mm) Number of Rows 2 Row Spacing - Mating 0.100" (2.54mm) Mounting Type 0.100" (2.54mm) Mounting Type Through Hole Termination Solder Fastening Type Push-Pull Contact Finish - Mating Gold Insulation Color Black Insulation Height 0.290" (7.37mm) Contact Length - Post 0.120" (3.05mm)	Contact Type	Female Socket
Number of Positions Loaded71Pitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.120" (3.05mm)	Style	Board to Board
Pitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting Type0.100" (2.54mm)TerminationSolderFastening TypeSolderContact Finish - MatingPush-PullContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.120" (3.05mm)	Number of Positions	72
Number of Rows2Number of Rows0.100" (2.54mm)Row Spacing - MatingThrough HoleMounting TypeSolderTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.120" (3.05mm)	Number of Positions Loaded	71
Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Fungt - Post0.120" (3.05mm)	Pitch - Mating	0.100" (2.54mm)
Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.120" (3.05mm)	Number of Rows	2
TerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.120" (3.05mm)	Row Spacing - Mating	0.100" (2.54mm)
Fastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.120" (3.05mm)	Mounting Type	Through Hole
Contact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.120" (3.05mm)	Termination	Solder
Contact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.120" (3.05mm)	Fastening Type	Push-Pull
Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.120" (3.05mm)	Contact Finish - Mating	Gold
Insulation Height0.290" (7.37mm)Contact Length - Post0.120" (3.05mm)	Contact Finish Thickness - Mating	10µin (0.25µm)
Contact Length - Post 0.120" (3.05mm)	Insulation Color	Black
-	Insulation Height	0.290" (7.37mm)
Operating Temperature $-55^{\circ}C \sim 125^{\circ}C$	Contact Length - Post	0.120" (3.05mm)
	Operating Temperature	-55°C ~ 125°C
Material Flammability Rating UL94 V-0	Material Flammability Rating	UL94 V-0

Contact Finish - Post	Tin
Mated Stacking Heights	-
Ingress Protection	-
Features	-
	Report errors?

BCS-136-L-D-DE-018 Guarantees



Quality Guarantees


We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

BCS-136-L-D-DE-018 Payment Methods

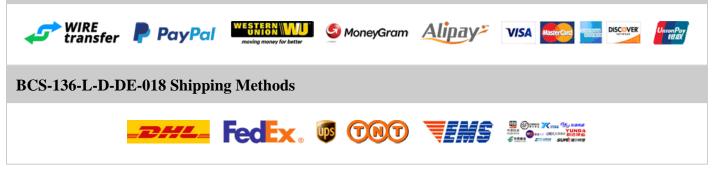

If you have any question about BCS-136-L-D-DE-018, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com