

BCS-136-L-S-PE-028

BCS-136-L-S-PE-028 Information

Heisener.com	Part Number	BCS-136-L-S-PE-028	
	Manufacturer	Samtec Inc.	
	Category	Connectors, Interconnects Rectangular Connectors - Headers, Receptacles, Female Sockets	
	Description Package	BOX CONNECTOR SOCKET STRIP	
For Reference Only		For the pricing/inventory/lead time, please contact us Website: https://www.heisener.com E-mail: salesdept@heisener.com	Request a Quote

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



BCS-136-L-S-PE-028 Specifications

Manufacturer Part NumberBCS-136-L-S-PE-028ManufacturerSamtee Inc.CategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesTiger Clane? BCSConnector TypeReceptacle, Pass ThroughContact TypeBoard to BoardNumber of Positions36Number of Positions Loaded35Pitch - Mating0.100° (2.54mm)Number of Rows1Number of Rows1TerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish - Mating59°C ~ 125°CInsulation HeightG.55°C ~ 125°CMetrial Flammability RatingUL94 V-0		
Category Connectors, Interconnects Rectangular Connectors - Headers, Receptacles, Female Sockets Package - Series Tiger Claw? BCS Connector Type Receptacle, Pass Through Contact Type Female Socket Style Board to Board Number of Positions 36 Number of Positions Loaded 35 Pitch - Mating 0.100° (2.54mm) Number of Rows 1 Number of Rows 1 Number of Rows 1 Nouting Type Phoney Hole Young Hole Solder Contact Finish - Mating Odd Contact Finish - Mating Jouin (0.25µm) Solder Solder Station Color Black Insulation Color Black Insulation Height 0.290° (7.37mm) Operating Temperature s5°C ~ 125°C	Manufacturer Part Number	BCS-136-L-S-PE-028
Icetangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesTiger Claw? BCSConnector TypeReceptacle, Pass ThroughContact TypeBoard BoardStyleBoard to BoardNumber of Positions36Number of Positions Loaded5Pich - Mating0.100° (2.54mm)Number of Rows1Nording Type9.100° (2.54mm)Number of Rows1Row Spacing - Mating-Nording TypeSolderTerminationSolderFortant TypeSolderContact Finish - MatingGoldContact Finish - MatingGoldNution ColorBackInsulation ColorBackInsulation ColorJour (3.7mm)Insulation Height0.20° (7.37mn)Oratet Finish Fors1.28° (2.5°C)	Manufacturer	Samtec Inc.
Package-SeriesTiger Claw? BCSConnector TypeReceptacle, Pass ThroughContact TypeFemale SocketStyleBoard to BoardNumber of Positions36Number of Positions Loaded35Pitch - Mating0.100° (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderFastening TypeQuidContact Finish - MatingGoldContact Finish Thickness - MatingIupin (0.25µm)Insulation ColorBlackInsulation Height0.290° (7.37mm)Contact Length - Post0.128° (3.25mm)Operating Temperature-55° C ~ 125°C	Category	Connectors, Interconnects
SeriesTiger Claw? BCSConnector TypeReceptacle, Pass ThroughContact TypeFemale SocketStyleBoard to BoardNumber of Positions36Number of Positions Loaded35Pitch - Mating0.100° (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleYounder finish - MatingSolderContact Finish - MatingGoldContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.290° (7.37mm)Contact Fungt- Post0.128° (3.25mn)Contact Fungt - Post55° C~ 125°C		Rectangular Connectors - Headers, Receptacles, Female Sockets
Connector Type Receptacle, Pass Through Contact Type Female Socket Style Board to Board Number of Positions 36 Number of Positions Loaded 35 Pitch - Mating 0.100° (2.54mm) Number of Rows 1 Row Spacing - Mating - Mounting Type Through Hole Termination Solder Contact Finish - Mating Gold Contact Finish - Mating Gold Insulation Color Black Insulation Height 0.290° (7.37mm) Contact Length - Post 0.128°(3.25mn)	Package	-
Contact TypeFemale SocketStyleBoard to BoardNumber of Positions36Number of Positions Loaded35Pitch - Mating0.100° (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - Mating0.10µí (0.25µm)Insulation ColorBlackInsulation Height0.290° (7.37mm)Contact Length - Post0.128° (3.25mm)Operating Temperature-55°C ~ 125°C	Series	Tiger Claw? BCS
StyleBoard to BoardStyleBoard to BoardNumber of Positions36Number of Positions Loaded35Pitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post55°C ~ 125°C	Connector Type	Receptacle, Pass Through
Number of Positions 36 Number of Positions Loaded 35 Pitch - Mating 0.100" (2.54mm) Number of Rows 1 Row Spacing - Mating - Mounting Type Through Hole Termination Solder Fastening Type Push-Pull Contact Finish - Mating Gold Contact Finish Thickness - Mating Jupin (0.25µm) Insulation Color Black Insulation Height 0.290" (7.37mm) Contact Length - Post 0.128" (3.25mm)	Contact Type	Female Socket
Number of Positions Loaded35Pitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.128" (3.25mm)Operating Temperature-55°C ~ 125°C	Style	Board to Board
Pitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingBlackInsulation Color0.290" (7.37mm)Contact Length - Post0.128" (3.25mm)Operating Temperature55°C ~ 125°C	Number of Positions	36
Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.128" (3.25mm)Operating Temperature-55°C ~ 125°C	Number of Positions Loaded	35
Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingI/uin (0.25µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.128" (3.25mm)Operating Temperature-55°C ~ 125°C	Pitch - Mating	0.100" (2.54mm)
Mounting TypeThrough HoleMounting TypeSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.128" (3.25mm)Operating Temperature-55°C ~ 125°C	Number of Rows	1
TerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.128" (3.25mm)Operating Temperature-55°C ~ 125°C	Row Spacing - Mating	-
Fastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.128" (3.25mm)Operating Temperature-55°C ~ 125°C	Mounting Type	Through Hole
Contact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.128" (3.25mm)Operating Temperature-55°C ~ 125°C	Termination	Solder
Contact Finish Thickness - Mating10μin (0.25μm)Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.128" (3.25mm)Operating Temperature-55°C ~ 125°C	Fastening Type	Push-Pull
Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.128" (3.25mm)Operating Temperature-55°C ~ 125°C	Contact Finish - Mating	Gold
Insulation Height0.290" (7.37mm)Contact Length - Post0.128" (3.25mm)Operating Temperature-55°C ~ 125°C	Contact Finish Thickness - Mating	10μin (0.25μm)
Contact Length - Post0.128" (3.25mm)Operating Temperature-55°C ~ 125°C	Insulation Color	Black
Operating Temperature $-55^{\circ}C \sim 125^{\circ}C$	Insulation Height	0.290" (7.37mm)
	Contact Length - Post	0.128" (3.25mm)
Material Flammability Rating UL94 V-0	Operating Temperature	-55°C ~ 125°C
	Material Flammability Rating	UL94 V-0

Contact Finish - Post	Tin
Mated Stacking Heights	-
Ingress Protection	-
Features	-
	Report errors?

BCS-136-L-S-PE-028 Guarantees



Quality Guarantees


We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

BCS-136-L-S-PE-028 Payment Methods

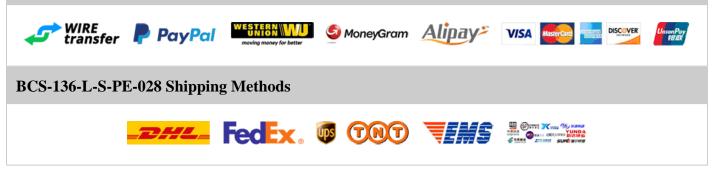

If you have any question about BCS-136-L-S-PE-028, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com