

BCS-146-L-S-DE-044

BCS-146-L-S-DE-044 Information

Manufac Category Descript	Part Number Manufacturer Category	BCS-146-L-S-DE-044 Samtec Inc. Connectors, Interconnects Rectangular Connectors - Headers, Receptacles, Female Sockets	
	Description Package	BOX CONNECTOR SOCKET STRIP	
For Deference Only		For the pricing/inventory/lead time, please contact us	
For Reference Only		Website: https://www.heisener.com E-mail: salesdept@heisener.com	Request a Quote

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



BCS-146-L-S-DE-044 Specifications

Manufacturer Part NumberBCS-146-L-S-DE-044ManufacturerSamee Inc.CategoryConnectors, InterconnectsPackage-SeriesTiger Clany? BCSConnector TypeReceptacle, Bottom or Top EntryContact TypeReceptacle, Bottom or Top EntryContact TypeBoard to BoardNumber of Positions46Number of Positions Loaded1Number of Rows1Number of Rows1Number of RowsSolderFreminationSolderStreins TypeSolderStreins TypeGold CostamingNumber of Rows1Contact Finish AndingSolderStreins TypeSolderStreins TypeS		
Category Connectors, Interconnects Rectangular Connectors - Headers, Receptacles, Female Sockets Package - Series Tiger Claw? BCS Connector Type Receptacle, Bottom or Top Entry Contact Type Female Socket Style Board to Board Number of Positions 46 Number of Positions Loaded 45 Number of Rows 1 Number of Rows 1 Number of Rows 1 Nounting Type Through Hole Young Type Solder Fastening Type Quint (0.25µm) Contact Finish - Mating Gold Contact Finish - Mating Jouin (0.25µm) Solare Solare Finish - Mating Gold Contact Finish Thickness - Mating Jouin (0.25µm) Insulation Color Black Insulation Height 0.209" (7.37mm) Contact Length - Post 0.120" (3.05mm)	Manufacturer Part Number	BCS-146-L-S-DE-044
Indext Connectors - Headers, Receptacles, Female SocketsPackage-SeriesTiger Claw? BCSConnector TypeReceptacle, Bottom or Top EntryContact TypeBoard to BoardStyleBoard to BoardNumber of Positions46Number of Positions Loaded1Number of Rows1Number of Rows1Number of Rows-Number of RowsSolderYerminationSolderSteining TypeSolderContact Finish FundangGoldSteining TypeIpin (0.5pin)Steining TypeBlackSultation ColorBlackSteining Height0.200°(7.37mm)Steining ForstSiltor SiltorsSteining TypeSiltor SiltorsSteining HeightSiltor SiltorsSteining TypeSiltor SiltorsSteining TypeSiltorsSteining TypeSiltorsSteining TypeSiltorsSteining Type <td< td=""><td>Manufacturer</td><td>Samtec Inc.</td></td<>	Manufacturer	Samtec Inc.
Package-SeriesTiger Clav? BCSConnector TypeReceptacle, Bottom or Top EntryContact TypeFemale SocketStyleBoard to BoardNumber of Positions46Number of Positions Loaded5Pitch - Mating0.100° (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleYourd Forsitions Loaded6SolderSolderRow Spacing - Mating-Contact Finish - MatingGoldContact Finish Thickness - MatingIojun (0.25µm)Insulation ColorBlackInsulation Height0.290° (7.37mm)Contact Length - Post0.120° (3.05mm)Operating Temperature55°C ~ 125°C	Category	Connectors, Interconnects
SeriesTiger Claw? BCSConnector TypeReceptacle, Bottom or Top EntryContact TypeFemale SocketStyleBoard to BoardNumber of Positions46Number of Positions Loaded45Number of Rows1Number of Rows1Number of Rows-Nourding TypeThrough HoleYourding TypeSolderContact Finish - MatingGoldContact Finish - MatingGoldSoltar Einish - MatingInpin (0.25µm)Soltar Einish - MatingSolderSoltar Finish - MatingGoldContact Finish - MatingBackInsulation ColorBackInsulation Height0.200" (7.37mm)Contact Length - PostJ.20" (3.05mm)Operating Temperature-5%C ~ 125°C		Rectangular Connectors - Headers, Receptacles, Female Sockets
Connector Type Receptacle, Bottom or Top Entry Contact Type Female Socket Style Board to Board Number of Positions 46 Number of Positions Loaded 45 Pitch - Mating 0.100" (2.54mm) Number of Rows 1 Row Spacing - Mating - Mounting Type Through Hole Termination Solder Contact Finish - Mating Gold Contact Finish - Mating Gold Contact Finish Thickness - Mating Black Insulation Color Black Insulation Height 0.200" (7.37mm) Contact Length - Post 0.120" (3.05mm)	Package	-
Contact TypeFemale SocketStyleBoard to BoardNumber of Positions46Number of Positions Loaded45Pitch - Mating0.100° (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.290° (7.37mm)Contact Length - Post0.100° (3.05mm)Operating Temperature-55°C ~ 125°C	Series	Tiger Claw? BCS
StyleBoard to BoardStyleBoard to BoardNumber of Positions46Number of Positions Loaded45Pitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingJupin (0.25µm)Insulation Height0.290" (7.37mm)Contact Length - Post0.120" (3.05mm)Operating Temperature-55°C ~ 125°C	Connector Type	Receptacle, Bottom or Top Entry
Number of Positions 46 Number of Positions Loaded 45 Pitch - Mating 0.100" (2.54mm) Number of Rows 1 Row Spacing - Mating - Mounting Type Through Hole Termination Solder Fastening Type Push-Pull Contact Finish - Mating Gold Contact Finish Thickness - Mating Jupin (0.25µm) Insulation Color Black Insulation Height 0.290" (7.37mm) Contact Length - Post 0.120" (3.05mm)	Contact Type	Female Socket
Number of Positions Loaded45Pitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingIlpuin (0.25µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.120" (3.05mm)Operating Temperature-55°C ~ 125°C	Style	Board to Board
Pitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingBlackInsulation Color0.290" (7.37mm)Contact Length - Post0.120" (3.05mm)Operating Temperature-55°C ~ 125°C	Number of Positions	46
Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingI/µin (0.25µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.120" (3.05mm)Operating Temperature-55°C ~ 125°C	Number of Positions Loaded	45
Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.120" (3.05mm)Operating Temperature-55°C ~ 125°C	Pitch - Mating	0.100" (2.54mm)
Mounting TypeThrough HoleMounting TypeSolderTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.120" (3.05mm)Operating Temperature-55°C ~ 125°C	Number of Rows	1
TerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.120" (3.05mm)Operating Temperature-55°C ~ 125°C	Row Spacing - Mating	-
Fastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.120" (3.05mm)Operating Temperature-55°C ~ 125°C	Mounting Type	Through Hole
Contact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.120" (3.05mm)Operating Temperature-55°C ~ 125°C	Termination	Solder
Contact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.120" (3.05mm)Operating Temperature-55°C ~ 125°C	Fastening Type	Push-Pull
Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.120" (3.05mm)Operating Temperature-55°C ~ 125°C	Contact Finish - Mating	Gold
Insulation Height 0.290" (7.37mm) Contact Length - Post 0.120" (3.05mm) Operating Temperature -55°C ~ 125°C	Contact Finish Thickness - Mating	10µin (0.25µm)
Contact Length - Post0.120" (3.05mm)Operating Temperature-55°C ~ 125°C	Insulation Color	Black
Operating Temperature $-55^{\circ}C \sim 125^{\circ}C$	Insulation Height	0.290" (7.37mm)
	Contact Length - Post	0.120" (3.05mm)
Material Flammability Rating UL94 V-0	Operating Temperature	-55°C ~ 125°C
	Material Flammability Rating	UL94 V-0

Contact Finish - Post	Tin		
Mated Stacking Heights	-		
Ingress Protection	-		
Features	-		
		Report	errors?

BCS-146-L-S-DE-044 Guarantees



Quality Guarantees


We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

BCS-146-L-S-DE-044 Payment Methods

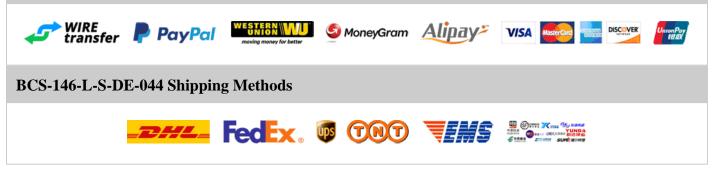

If you have any question about BCS-146-L-S-DE-044, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com