

BCS-146-L-S-PE-046

BCS-146-L-S-PE-046 Information

Heisener.com	Part Number	BCS-146-L-S-PE-046	
	Manufacturer	Samtec Inc.	
	Category	Connectors, Interconnects Rectangular Connectors - Headers, Receptacles, Female Sockets	
	Description	BOX CONNECTOR SOCKET STRIP	2.2.4.00 ACA
	Package	-	
For Reference Only		For the pricing/inventory/lead time, please contact us	
		Website: https://www.heisener.com E-mail: salesdept@heisener.com	Request a Quote

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



BCS-146-L-S-PE-046 Specifications

Manufacturer Part NumberBCS-146-L-S-PE-046ManufacturerSamtec Inc.CategoryConnectors, InterconnectsPackage-Package-SeriesTiger Claw? BCSConnector TypeReceptacle, Pass ThroughContact TypeBoard to BoardNumber of Positions46Number of Positions Loaded1Number of Rows1Number of Rows1Number of RowsSolderFerniationSolderRow Spacing - MatingSolderFortight TypeSolderFerniationSolderFastening TypeGoldContact Finish - MatingGoldContact Finish - MatingGoldRatening TypeBackInsulation ColorBlackInsulation Height0.290" (7.37mm)		
CategoryConnectorsCategoryConnectors - Headers, Receptacles, Female SocketsPackage-SeriesTiger Claw? BCSConnector TypeReceptacle, Pass ThroughContact TypeFemale SocketStyleBoard to BoardNumber of Positions46Number of Positions Loaded1Pitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - MatingSolderMounting TypeThrough HoleFrantantionSolderFastening TypeOldContact Finish - MatingGoldContact Finish Thickness - MatingBoardInsulation ColorBlack	Manufacturer Part Number	BCS-146-L-S-PE-046
Rectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesTiger Claw? BCSConnector TypeReceptacle, Pass ThroughContact TypeFemale SocketStyleBoard to BoardNumber of Positions46Number of Positions Loaded45Pitch - Mating0.100° (2.54mm)Number of Rows1Row Spacing - Mating-Young TypeThrough HoleFerminationSolderFastening TypeOldContact Finish - MatingGoldContact Finish - MatingIopin (0.25µm)Insulation ColorBlack	Manufacturer	Samtec Inc.
Package-SeriesTiger Claw? BCSConnector TypeReceptacle, Pass ThroughContact TypeFemale SocketStyleBoard to BoardNumber of Positions46Number of Positions Loaded45Pitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleFastening TypeSolderFastening TypeGoldContact Finish - MatingGoldInsulation ColorBlack	Category	Connectors, Interconnects
SeriesTiger Claw? BCSConnector TypeReceptacle, Pass ThroughContact TypeFemale SocketStyleBoard to BoardNumber of Positions46Number of Positions Loaded45Pitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderFastening TypeQualContact Finish - MatingGoldContact Finish Thickness - MatingIupin (0.25µm)Insulation ColorBlack		Rectangular Connectors - Headers, Receptacles, Female Sockets
Connector TypeReceptacle, Pass ThroughContact TypeFemale SocketStyleBoard to BoardNumber of Positions46Number of Positions Loaded45Pitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleFastening TypePush-PullContact Finish - MatingGoldInsulation ColorBlack	Package	-
Contact TypeFemale SocketStyleBoard to BoardNumber of Positions46Number of Positions Loaded45Pitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldIonatt Finish - Mating10µin (0.25µm)Insulation ColorBlack	Series	Tiger Claw? BCS
StyleBoard to BoardStyleBoard to BoardNumber of Positions46Number of Positions Loaded45Pitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldIonact Finish Thickness - MatingIupin (0.25µm)BlackBlack	Connector Type	Receptacle, Pass Through
Number of Positions46Number of Positions Loaded45Pitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingIoµin (0.25µm)Insulation ColorBlack	Contact Type	Female Socket
Number of Positions Loaded45Pitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingI0µin (0.25µm)Insulation ColorBlack	Style	Board to Board
Pitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldIontact Finish Thickness - MatingIupin (0.25µm)BackBack	Number of Positions	46
Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldRontact Finish Thickness - MatingI/uin (0.25µm)Insulation ColorBlack	Number of Positions Loaded	45
Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlack	Pitch - Mating	0.100" (2.54mm)
Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlack	Number of Rows	1
TerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlack	Row Spacing - Mating	-
Fastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlack	Mounting Type	Through Hole
Contact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlack	Termination	Solder
Contact Finish Thickness - Mating10μin (0.25μm)Insulation ColorBlack	Fastening Type	Push-Pull
Insulation Color Black	Contact Finish - Mating	Gold
	Contact Finish Thickness - Mating	10µin (0.25µm)
Insulation Height 0.290" (7.37mm)	Insulation Color	Black
	Insulation Height	0.290" (7.37mm)
Contact Length - Post 0.128" (3.25mm)	Contact Length - Post	0.128" (3.25mm)
Operating Temperature $-55^{\circ}C \sim 125^{\circ}C$	Operating Temperature	-55°C ~ 125°C
Material Flammability Rating UL94 V-0	Material Flammability Rating	UL94 V-0

Contact Finish - Post	Tin
Mated Stacking Heights	-
Ingress Protection	-
Features	-
	Report errors?

BCS-146-L-S-PE-046 Guarantees



Quality Guarantees


We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

BCS-146-L-S-PE-046 Payment Methods

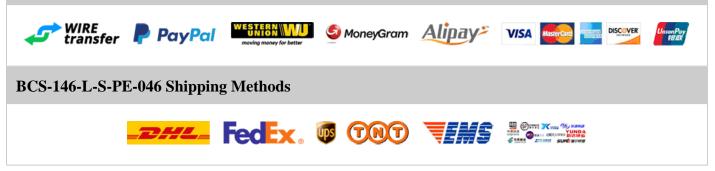

If you have any question about BCS-146-L-S-PE-046, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com