

# BCS-147-L-D-PE-034

#### BCS-147-L-D-PE-034 Information

	Dout Number	BCS-147-L-D-PE-034	
Container.com			
	Manufacturer	Samtec Inc.	C3500-827-3
	Category	Connectors, Interconnects Rectangular Connectors - Headers, Receptacles, Female Sockets	245-318 (C) 345-318 (C) 362-318 (C)
	Description	BOX CONNECTOR SOCKET STRIP	
	Package	-	国家返薪に
E D-f O-l		For the pricing/inventory/lead time, please contact us	
For Reference Only		Website: https://www.heisener.com E-mail: salesdept@heisener.com	Request a Quote

## **Certified Quality**

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



## **BCS-147-L-D-PE-034 Specifications**

Manufacturer Part NumberBCS-147-L-D-PE-034ManufacturerSamtee Inc.CategoryConnectors, InterconnectsPackage-SeriesTiger Claw? BCSConnector TypeReceptacle, Pass ThroughContact TypeFemale SocketStyleBoard to BoardNumber of Positions Loaded93Pich Aming0.100° (2.54mm)Number of Rows2Row Spacing - MatingNolo (2.54mm)Mounting TypeDolardSolderSolderFastening TypeSolderFastening TypeSolderInsulation ColorBackInsulation ColorBackInsulation ColorBackInsulation Height0.200° (7.37mm)Contact Length - Post0.128° (3.25mm)				
CategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesTiger Claw? BCSConnector TypeReceptacle, Pass ThroughContact TypeBoard BoardStyleBoard BoardNumber of Positions94Number of Positions Loaded93Pitch - Mating0.100° (2.54mm)Number of Rows2Row Spacing - Mating0.100° (2.54mm)Mouning TypeNong HoleForminationSolderForninationSolderForninationGoldForninationGoldInsulation ColorBackInsulation ColorBackInsulation Finish Mating0.20° (7.37mm)Insulation Height0.20° (7.37mm)Insulation Height0.128° (3.25mm)	Manufacturer Part Number	BCS-147-L-D-PE-034		
Hectanguar Connectors - Headers, Receptacles, Fenale SocketsPackage-SeriesTiger Claw? BCSConnector TypeReceptacle, Pass ThroughContact TypeFenale SocketStyleBoard to BoardNumber of Positions94Number of Positions Loaded93Pitch - Mating0.100° (2.54mm)Number of Rows2Row Spacing - Mating0.100° (2.54mm)Number of Rows0.100° (2.54mm)Mounting Type0.100° (2.54mm)Pitch - Mating0.100° (2.54mm)Mounting Type0.100° (2.54mm)ForminationGolderForninationGolderContact Finish - Mating0.100° (2.54mm)Contact Finish - MatingGoldInsulation ColorBlackInsulation Finish - Mating0.101° (2.54mm)Insulation Finish - Mating0.102° (2.54mm)Insulation Fin	Manufacturer	Samtec Inc.		
Package-SeriesTiger Claw? BCSConnector TypeReceptacle, Pass ThroughContact TypeFemale SocketStyleBoard to BoardNumber of Positions94Number of Positions Loaded93Pitch - Mating0.100° (2.54mm)Number of Rows2Row Spacing - Mating0.100° (2.54mm)Mounting Type0.100° (2.54mm)Youngh Type0.100° (2.54mm)FerminationSolderForninationSolderContact Finish - MatingOid (0.54mm)Contact Finish - MatingGoldContact Finish - MatingInju (0.25µm)Insulation ColorBlackInsulation Height0.290° (7.37mm)Contact Length - Post0.128° (3.25mm)	Category	Connectors, Interconnects		
SeriesTiger Claw? BCSConnector TypeReceptacle, Pass ThroughContact TypeFemale SocketStyleBoard to BoardNumber of Positions94Number of Positions Loaded93Pitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough HoleTerminationSolderFastening TypeQue NuContact Finish - MatingGoldInsulation ColorBackInsulation Height0.290" (7.37mm)Contact Length - Post0.128" (3.25mm)		Rectangular Connectors - Headers, Receptacles, Female Sockets		
Connector TypeReceptacle, Pass ThroughContact TypeFemale SocketStyleBoard to BoardNumber of Positions94Number of Positions Loaded93Pitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish - MatingInpuin (0.25µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.128" (3.25mm)	Package	-		
Contact TypeFemale SocketStyleBoard to BoardNumber of Positions94Number of Positions Loaded93Pitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeOloor (2.54mm)TerminationSolderFastening TypePush-PullContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.128" (3.25mm)	Series	Tiger Claw? BCS		
StyleBoard to BoardNumber of Positions94Number of Positions Loaded93Pitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting Type0.100" (2.54mm)TerminationSolderFastening TypePush-PullContact Finish - Mating0.0du (0.52µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.128" (3.25mm)	Connector Type	Receptacle, Pass Through		
Number of Positions 94   Number of Positions Loaded 93   Pitch - Mating 0.100" (2.54mm)   Number of Rows 2   Row Spacing - Mating 0.100" (2.54mm)   Mounting Type 0.100" (2.54mm)   Mounting Type Through Hole   Termination Solder   Fastening Type Push-Pull   Contact Finish - Mating Gold   Insulation Color Black   Insulation Height 0.290" (7.37mm)	Contact Type	Female Socket		
Number of Positions Loaded93Pitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.128" (3.25mm)	Style	Board to Board		
Pitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting Type0.100" (2.54mm)TerminationThrough HoleFastening TypeSolderFontact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.128" (3.25mm)	Number of Positions	94		
Number of Rows2Number of Rows0.100" (2.54mm)Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.128" (3.25mm)	Number of Positions Loaded	93		
Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.128" (3.25mm)	Pitch - Mating	0.100" (2.54mm)		
Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.128" (3.25mm)	Number of Rows	2		
TerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.128" (3.25mm)	Row Spacing - Mating	0.100" (2.54mm)		
Fastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.128" (3.25mm)	Mounting Type	Through Hole		
Contact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.128" (3.25mm)	Termination	Solder		
Contact Finish Thickness - Mating10μin (0.25μm)Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.128" (3.25mm)	Fastening Type	Push-Pull		
Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.128" (3.25mm)	Contact Finish - Mating	Gold		
Insulation Height0.290" (7.37mm)Contact Length - Post0.128" (3.25mm)	Contact Finish Thickness - Mating	10µin (0.25µm)		
Contact Length - Post 0.128" (3.25mm)	Insulation Color	Black		
-	Insulation Height	0.290" (7.37mm)		
Operating Temperature $-55^{\circ}C \sim 125^{\circ}C$	Contact Length - Post	0.128" (3.25mm)		
	Operating Temperature	-55°C ~ 125°C		
Material Flammability Rating UL94 V-0	Material Flammability Rating	UL94 V-0		

Contact Finish - Post	Tin		
Mated Stacking Heights	-		
Ingress Protection	-		
Features	-		
		Report	errors?

### BCS-147-L-D-PE-034 Guarantees



#### **Quality Guarantees**


We provide 90 days warranty. \* If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



#### **Service Guarantees**

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

### BCS-147-L-D-PE-034 Payment Methods

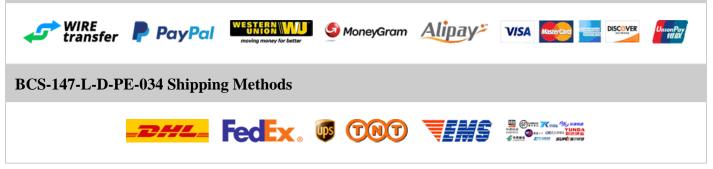

If you have any question about BCS-147-L-D-PE-034, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com