

BCS-147-L-D-PE-BE

BCS-147-L-D-PE-BE Information



Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



BCS-147-L-D-PE-BE Specifications

Manufacturer Part NumberBCS-147-L-D-PE-BEManufacturerSamtec Inc.CategoryConnectors, InterconnectsPackage-Package-SeriesTiger Claw? BCSConnector TypeReceptacle, Pass ThroughContact TypeFemale SocketStyleBoard to BoardNumber of Positions94Number of Positions LoadedAllNumber of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough HoleMounting TypeSolderFarening TypeOlderFastening TypeOlderFastening TypeOldo (Jour) (Jour)Fastening TypeOldo (Jour) (Jour)Fastening TypeOldo (Jour) (Jour)Fastening TypeOldo (Jour) (Jour)Fastening TypeOldo (Jour)Fa		
CategoryConnectors, InterconnectsPackage-SeriesTiger Claw? BCSConnector TypeReceptacle, Pass ThroughContact TypeBoard to BoardStyleBoard to BoardNumber of Positions94Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating5.0140" (2.54mm)Mounting TypeSolderFerminationSolderFastening TypeGoldContact Finish - MatingGoldContact Finish Thickness - MatingJipin (0.25µm)	Manufacturer Part Number	BCS-147-L-D-PE-BE
Package-SeriesTiger Claw? BCSConnector TypeReceptacle, Pass ThroughContact TypeFemale SocketStyleBoard to BoardNumber of Positions94Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - MatingSolderMounting TypeThrough HoleFastening TypeOudGoldGoldContact Finish - MatingJujin (0.25µm)	Manufacturer	Samtec Inc.
Package-SeriesTiger Claw? BCSConnector TypeReceptacle, Pass ThroughContact TypeFemale SocketStyleBoard to BoardNumber of Positions94Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough HoleFastening TypeSolderFastening TypeGoldContact Finish - Mating10µin (0.25µm)	Category	Connectors, Interconnects
SeriesTiger Claw? BCSConnector TypeReceptacle, Pass ThroughContact TypeFemale SocketStyleBoard to BoardNumber of Positions94Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough HoleFastening TypeSolderFastening TypeGoldContact Finish - MatingGoldLonder SolderJipin (0.25µm)		Rectangular Connectors - Headers, Receptacles, Female Sockets
Connector TypeReceptacle, Pass ThroughContact TypeFemale SocketStyleBoard to BoardNumber of Positions94Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldYoung Contact Finish Thickness - Mating10µin (0.25µm)	Package	-
Contact TypeFemale SocketStyleBoard to BoardNumber of Positions94Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldIonact Finish Thickness - Mating10µin (0.25µm)	Series	Tiger Claw? BCS
StyleBoard to BoardStyleBoard to BoardNumber of Positions94Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - Mating0.10Induct Finish - Mating10µin (0.25µm)	Connector Type	Receptacle, Pass Through
Number of Positions94Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldIonact Finish Thickness - Mating1µin (0.25µm)	Contact Type	Female Socket
Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldYour Contact Finish - Mating10µin (0.25µm)	Style	Board to Board
Pitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldKontact Finish - Mating10µin (0.25µm)	Number of Positions	94
Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)	Number of Positions Loaded	All
Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)	Pitch - Mating	0.100" (2.54mm)
Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)	Number of Rows	2
TerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)	Row Spacing - Mating	0.100" (2.54mm)
Fastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10μin (0.25μm)	Mounting Type	Through Hole
Contact Finish - MatingGoldContact Finish Thickness - Mating10μin (0.25μm)	Termination	Solder
Contact Finish Thickness - Mating 10µin (0.25µm)	Fastening Type	Push-Pull
	Contact Finish - Mating	Gold
Insulation Color Plack	Contact Finish Thickness - Mating	10μin (0.25μm)
Insulation Color Black	Insulation Color	Black
Insulation Height 0.290" (7.37mm)	Insulation Height	0.290" (7.37mm)
Contact Length - Post 0.128" (3.25mm)	Contact Length - Post	0.128" (3.25mm)
Operating Temperature $-55^{\circ}C \sim 125^{\circ}C$	Operating Temperature	-55°C ~ 125°C
Material Flammability Rating UL94 V-0	Material Flammability Rating	UL94 V-0

Contact Finish - Post	Tin
Mated Stacking Heights	-
Ingress Protection	-
Features	-
	Report errors?

BCS-147-L-D-PE-BE Guarantees



Quality Guarantees


We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

BCS-147-L-D-PE-BE Payment Methods

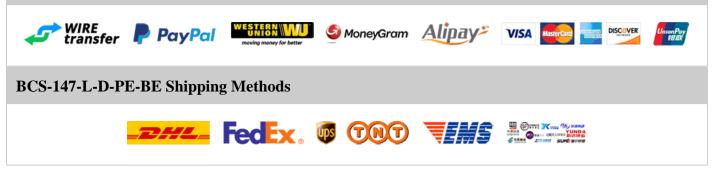

If you have any question about BCS-147-L-D-PE-BE, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com