

BCS-148-L-D-DE-041

BCS-148-L-D-DE-041 Information

Heisener.com	Part Number Manufacturer	BCS-148-L-D-DE-041 Samtec Inc.	
	Category	Connectors, Interconnects Rectangular Connectors - Headers, Receptacles, Female Sockets	
	Description Package	BOX CONNECTOR SOCKET STRIP	「東京」の約
For Reference Only	g.	For the pricing/inventory/lead time, please contact us Website: https://www.heisener.com E-mail: salesdept@heisener.com	Request a Quote

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



BCS-148-L-D-DE-041 Specifications

Manufacturer Part NumberBCS-148-L-D-DE-041ManufacturerSamtec Inc.CategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesTiger Clav? BCSConnector TypeReceptacle, Bottom or Top EntryContact TypeBoard to BoardNumber of Positions Loaded96Number of Positions Loaded0.100° (2.54mm)Number of Rows2Row Spacing - MatingO.100° (2.54mm)Mounting TypeThrough HoleTerminationSolderFastening TypeQoldContact Finish - MatingO.100 (0.25µm)Station ColorSolderFastening TypeDidu (0.25µm)Contact Finish - MatingO.100 (0.25µm)SolderSolderFastening TypeDidu (0.25µm)Contact Finish - MatingO.100 (0.25µm)Contact Finish - MatingO.100 (0.25µm)Contact Finish - MatingO.100 (0.25µm)Contact Finish - MatingO.100 (0.25µm)Insulation ColorBlackInsulation Finish Thickness - MatingO.100 (0.25µm)Insulation Finish Thickness - MatingO.100 (0.25µm)Insulation Height0.200 (0.37mm)Contact Length - Post0.120 (0.305mm)Contact Length - Post0.120 (0.305mm		
CategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesTiger Claw? BCSConnector TypeReceptacle, Bottom or Top EntryContact TypeBoard to BoardStyleBoard to BoardNumber of Positions96Number of Positions Loaded95Number of Rows2Row Spacing - Mating0.100° (2.54mm)Number of Rows0.100° (2.54mm)Number of Rows0.100° (2.54mm)FreminationSolderForten HandingSolderContact Finish - MatingOldo (2.54mm)Contact Finish - MatingGoldContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.290° (7.37mm)Contact Length - Post0.102° (3.05mm)Contact Finish Thickness - Mating0.102° (3.05mm)Contact Length - Post0.55° C - 125°C	Manufacturer Part Number	BCS-148-L-D-DE-041
Image: PackageRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesTiger Claw? BCSConnector TypeReceptacle, Bottom or Top EntryContact TypeFemale SocketStyleBoard to BoardNumber of Positions96Number of Positions Loaded95Pitch - Mating0.100° (2.54mm)Number of Rows2Row Spacing - Mating0.100° (2.54mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingIpin (0.25µm)Insulation ColorBlackInsulation Height0.200° (7.37mm)Contact Length - Post0.120° (3.05mm)Solar Engregerature55° C ~ 125°C	Manufacturer	Samtec Inc.
Package-SeriesTiger Clav? BCSConnector TypeReceptacle, Bottom or Top EntryContact TypeFemale SocketStyleBoard to BoardNumber of Positions96Number of Positions Loaded95Pitch - Mating0.100° (2.54mm)Number of Rows2Row Spacing - Mating0.100° (2.54mm)Mounting Type0.100° (2.54mm)TerminationSolderFastening TypeVanhPullContact Finish - MatingGoldContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.290° (7.37mm)Contact Length - Post0.120° (3.05mm)Contact Finish Thota55° C~ 125°C	Category	Connectors, Interconnects
SeriesTiger Claw? BCSConnector TypeReceptacle, Bottom or Top EntryContact TypeFemale SocketStyleBoard to BoardNumber of Positions96Number of Positions Loaded95Pitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting Type0.100" (2.54mm)YerminationSolderForeinfunctionSolderForting TypePush-PullContact Finish - MatingGoldContact Finish - MatingIpuin (0.25µm)Insulation ColorBlackInsulation Height0.290" (.37mm)Contact Length - Post0.120" (3.05mm)Operating Temperature-55°C ~ 125°C		Rectangular Connectors - Headers, Receptacles, Female Sockets
Connector TypeReceptacle, Bottom or Top EntryContact TypeFemale SocketStyleBoard to BoardNumber of Positions96Number of Positions Loaded95Pitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting Type0.100" (2.54mm)TerminationSolderFastening TypeVush-PullContact Finish - MatingGoldContact Finish - Mating0.100" (2.5µm)Insulation ColorBlackInsulation Height0.200" (7.37mm)Contact Length - Post0.120" (3.05mm)Operating Temperature-55°C ~ 125°C	Package	-
Contact TypeFemale SocketStyleBoard to BoardNumber of Positions96Number of Positions Loaded95Pitch - Mating0.100° (2.54mm)Number of Rows2Row Spacing - Mating0.100° (2.54mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.200° (7.37mm)Contact Length - Post0.100° (3.55°COperating Temperature55°C ~ 125°C	Series	Tiger Claw? BCS
StyleBoard to BoardStyleBoard to BoardNumber of Positions96Number of Positions Loaded95Pitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting Type0.100" (2.54mm)TerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.120" (3.05mm)Operating Temperature-55°C ~ 125°C	Connector Type	Receptacle, Bottom or Top Entry
Number of Positions 96 Number of Positions Loaded 95 Pitch - Mating 0.100" (2.54mm) Number of Rows 2 Row Spacing - Mating 0.100" (2.54mm) Mounting Type 0.100" (2.54mm) Mounting Type Onton" (2.54mm) Termination 0.100" (2.54mm) Fastening Type Push-Pull Contact Finish - Mating Gold Contact Finish Thickness - Mating 10µin (0.25µm) Insulation Color Black Insulation Height 0.290" (7.37mm) Contact Length - Post 0.102" (3.05mm)	Contact Type	Female Socket
Number of Positions Loaded95Pitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingIupin (0.25µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.120" (3.05mm)Operating Temperature-55°C ~ 125°C	Style	Board to Board
Pitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting Type0.100" (2.54mm)TerminationThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingIupin (0.25µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post55°C ~ 125°C	Number of Positions	96
Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.120" (3.05mm)Operating Temperature-55°C ~ 125°C	Number of Positions Loaded	95
Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.120" (3.05mm)Operating Temperature-55°C ~ 125°C	Pitch - Mating	0.100" (2.54mm)
Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.120" (3.05mm)Operating Temperature-55°C ~ 125°C	Number of Rows	2
TerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.120" (3.05mm)Operating Temperature-55°C ~ 125°C	Row Spacing - Mating	0.100" (2.54mm)
Fastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.120" (3.05mm)Operating Temperature-55°C ~ 125°C	Mounting Type	Through Hole
Contact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.120" (3.05mm)Operating Temperature-55°C ~ 125°C	Termination	Solder
Contact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.120" (3.05mm)Operating Temperature-55°C ~ 125°C	Fastening Type	Push-Pull
Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.120" (3.05mm)Operating Temperature-55°C ~ 125°C	Contact Finish - Mating	Gold
Insulation Height 0.290" (7.37mm) Contact Length - Post 0.120" (3.05mm) Operating Temperature -55°C ~ 125°C	Contact Finish Thickness - Mating	10μin (0.25μm)
Contact Length - Post 0.120" (3.05mm) Operating Temperature -55°C ~ 125°C	Insulation Color	Black
Operating Temperature $-55^{\circ}C \sim 125^{\circ}C$	Insulation Height	0.290" (7.37mm)
	Contact Length - Post	0.120" (3.05mm)
	Operating Temperature	-55°C ~ 125°C
Material Flammability Rating UL94 V-0	Material Flammability Rating	UL94 V-0

Contact Finish - Post	Tin
Mated Stacking Heights	-
Ingress Protection	-
Features	-
	Report errors?

BCS-148-L-D-DE-041 Guarantees



Quality Guarantees


We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

BCS-148-L-D-DE-041 Payment Methods

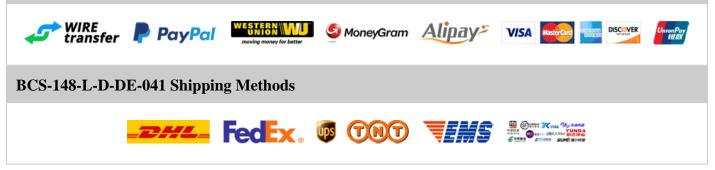

If you have any question about BCS-148-L-D-DE-041, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com