

BCS-148-L-D-TE-092

BCS-148-L-D-TE-092 Information

Heisener.com	Part Number Manufacturer Category	BCS-148-L-D-TE-092 Samtec Inc. Connectors, Interconnects Rectangular Connectors - Headers, Receptacles, Female Sockets	
	Description	BOX CONNECTOR SOCKET STRIP	
	Package	-	
For Reference Only		For the pricing/inventory/lead time, please contact	
		us Website: https://www.heisener.com E-mail: salesdept@heisener.com	Request a Quote

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



BCS-148-L-D-TE-092 Specifications

Manufacturer Part NumberBCS-148-L-D-1E-092ManufacturerSamtec Inc.CategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesTiger Clav? BCSConnector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions96Number of Positions Loaded95Pitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough HoleFrastening TypeQoldContact Finish - MatingGoldContact Finish - MatingIupin (0.25µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)		
CategoryConnectors, Interconnects Rectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesTiger Claw? BCSConnector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions96Number of Positions Loaded95Pich - Mating0.100° (2.54mm)Number of Rows2Row Spacing - Mating0.100° (2.54mm)Number of Positions0.100° (2.54mm)Number of Rows0.100° (2.54mm)FreminationSolderForninationSolderForninationGoldContact Finish - MatingGoldContact Finish - MatingInju (0.25µm)Insulation ColorBlack	Manufacturer Part Number	BCS-148-L-D-TE-092
IdentifyRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesTiger Claw? BCSConnector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions96Number of Positions Loaded95Pitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Monting TypeSolderFreminationSolderFastening TypeSolderContact Finish - MatingGoldContact Finish - MatingGoldInsulation ColorBack	Manufacturer	Samtec Inc.
Package-SeriesTiger Claw? BCSConnector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions96Number of Positions Loaded95Pitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough HoleTerminationSolderFastening TypeOsldContact Finish - MatingGoldContact Finish - MatingBoardInsulation ColorBlack	Category	Connectors, Interconnects
SeriesTiger Claw? BCSConnector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions96Number of Positions Loaded95Pitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough HoleTerminationSolderFastening TypeQualContact Finish - MatingGoldContact Finish - MatingBiack		Rectangular Connectors - Headers, Receptacles, Female Sockets
Connector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions96Number of Positions Loaded95Pitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough HoleFastening TypeSolderFastening TypeGoldContact Finish - Mating0.100Insulation ColorBlack	Package	-
Contact TypeFemale SocketStyleBoard to BoardNumber of Positions96Number of Positions Loaded95Pitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldIonatt Finish - MatingBlack	Series	Tiger Claw? BCS
StyleBoard to BoardNumber of Positions96Number of Positions Loaded95Pitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldIonat Finish Thickness - MatingIoµin (0.25µm)Insulation ColorBlack	Connector Type	Receptacle
Number of Positions96Number of Positions Loaded95Pitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldIontact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlack	Contact Type	Female Socket
Number of Positions Loaded95Pitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingIupin (0.25µm)Insulation ColorBlack	Style	Board to Board
Pitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldIonta Color10µin (0.25µm)BackBlack	Number of Positions	96
Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlack	Number of Positions Loaded	95
Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlack	Pitch - Mating	0.100" (2.54mm)
Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlack	Number of Rows	2
TerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlack	Row Spacing - Mating	0.100" (2.54mm)
Fastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlack	Mounting Type	Through Hole
Contact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlack	Termination	Solder
Contact Finish Thickness - Mating10μin (0.25μm)Insulation ColorBlack	Fastening Type	Push-Pull
Insulation Color Black	Contact Finish - Mating	Gold
	Contact Finish Thickness - Mating	10μin (0.25μm)
Insulation Height 0.290" (7.37mm)	Insulation Color	Black
	Insulation Height	0.290" (7.37mm)
Contact Length - Post 0.122" (3.10mm)	Contact Length - Post	0.122" (3.10mm)
Operating Temperature $-55^{\circ}C \sim 125^{\circ}C$	Operating Temperature	-55°C ~ 125°C
Material Flammability Rating UL94 V-0	Material Flammability Rating	UL94 V-0

Contact Finish - Post	Tin		
Mated Stacking Heights	-		
Ingress Protection	-		
Features	-		
		Report	errors?

BCS-148-L-D-TE-092 Guarantees



Quality Guarantees


We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

BCS-148-L-D-TE-092 Payment Methods

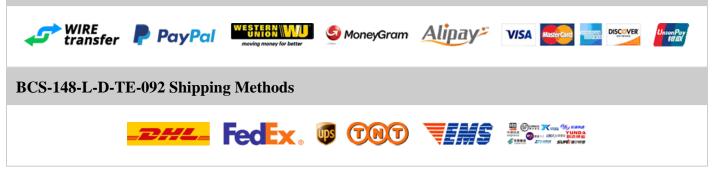

If you have any question about BCS-148-L-D-TE-092, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com