

BCS-149-L-S-PE-003

BCS-149-L-S-PE-003 Information

Heisener.com	Part Number	BCS-149-L-S-PE-003	
	Manufacturer	Samtec Inc.	
	Category	Connectors, Interconnects Rectangular Connectors - Headers, Receptacles, Female Sockets	
	Description	BOX CONNECTOR SOCKET STRIP	
	Package	-	
For Reference Only		For the pricing/inventory/lead time, please contact	
		us Website: https://www.heisener.com E-mail: salesdept@heisener.com	Request a Quote

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



BCS-149-L-S-PE-003 Specifications

Manufacturer Part NumberBCS-149-L-S-PE-003ManufacturerSamtee Inc.CategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesTiger Claney BCSConnector TypeReceptacle, Pass ThroughContact TypeBoard to BoardStyleBoard to BoardNumber of Positions49Number of Positions Loaded1Number of Rows1Number of Rows1Number of Rows1FerninationSolderFatening TypeSolderContact Finish - MatingSolderContact Finish - MatingSolderStatening TypeGold (DSpun)Contact Finish - MatingSolderStatening TypeInde SocketStatening TypeSolderContact Finish - MatingSolderContact Finish - MatingSolderStatening TypeInde SocketStatening TypeSolderContact Finish Thickness - MatingSolderInsulation ColorBacketInsulation ColorSolderInsulation ColorSolger (JSrmm)Contact Length - PostSolger (JSrmm)Contact Length - Pos		
Category Connectors, Interconnects Rectangular Connectors - Headers, Receptacles, Female Sockets Package - Series Tiger Claw? BCS Connector Type Receptacle, Pass Through Contact Type Female Socket Style Board to Board Number of Positions 49 Number of Positions Loaded 48 Pitch - Mating 0.100° (2.54mm) Number of Rows 1 Number of Rows 1 Number of Rows 0.100° (2.54mm) Number of Rows 1 Row Spacing - Mating - Nounting Type Through Hole Younting Type Olde Contact Finish - Mating Gold Contact Finish Thickness - Mating Ipin (0.25µm) Insulation Color Black Insulation Height 0.290° (7.37mm) Contact Length - Post 0.128° (3.25mm)	Manufacturer Part Number	BCS-149-L-S-PE-003
Indext Connectors - Headers, Receptacles, Female SocketsPackage-SeriesTiger Claw? BCSConnector TypeReceptacle, Pass ThroughContact TypeBoard to BoardStyleBoard to BoardNumber of Positions49Number of Positions LoadedANumber of Rows0.100° (2.54mm)Number of Rows1Row Spacing - MatingSolderNouring TypeSolderFerninationSolderForture TypeSolderContact Finish - MatingGoldContact Finish - MatingGoldStation ColorBackInsulation ColorBackStation Finish - MatingSolor (3.7mm)Contact Finish - MatingSolor (3.2mm)Station Finish - MatingSolor (3.2mm)Station Finish - MatingSolor (3.2mm)Station ColorSolor (3.2mm)Station Finish - MatingSolor (3.2mm)Station Finish - Solor (3.2mm)Solor (3.2mm)Station Finish - Solor (3.2	Manufacturer	Samtec Inc.
Package-SeriesTiger Claw? BCSConnector TypeReceptacle, Pass ThroughContact TypeFemale SocketStyleBoard to BoardNumber of Positions49Number of Positions Loaded8Pitch - Mating0.100° (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleYenning Type0.100° (2.54mm)Contact Finish - Mating6.0derContact Finish - Mating6.0derStation Color1.0derFinish Thickness - Mating1.0din (0.25µm)Insulation ColorBlackInsulation Height0.290° (7.37mm)Contact Length - Post0.128° (3.25mm)Operating Temperature55°C ~ 125°C	Category	Connectors, Interconnects
SeriesTiger Claw? BCSConnector TypeReceptacle, Pass ThroughContact TypeFemale SocketStyleBoard to BoardNumber of Positions49Number of Positions Loaded48Pitch - Mating0.100° (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleYounder Finish - MatingSolderContact Finish - MatingGoldContact Finish - MatingGoldSoltar Finish - MatingGoldSoltar Finish - MatingBackContact Finish - Mating0.200° (7.37mm)Soltar Hole0.200° (7.37mm)Contact Length - Post0.128° (3.25mn)Contart Finish - MatingSolzerSoltar HoleSolzerSoltar HoleSolzerContact Finish Thickness - MatingSolderSoltar HoleSolzerSoltar HoleS		Rectangular Connectors - Headers, Receptacles, Female Sockets
Connector Type Receptacle, Pass Through Contact Type Female Socket Style Board to Board Number of Positions 49 Number of Positions Loaded 48 Pitch - Mating 0.100° (2.54mm) Number of Rows 1 Row Spacing - Mating - Mounting Type Through Hole Termination Solder Contact Finish - Mating Gold Contact Finish - Mating Gold Contact Finish Thickness - Mating Black Insulation Color Black Insulation Height 0.290° (7.37mm) Contact Length - Post 0.128° (3.25mn)	Package	-
Contact TypeFemale SocketStyleBoard to BoardNumber of Positions49Number of Positions Loaded48Pitch - Mating0.100° (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.290° (7.37mm)Contact Length - Post0.128° (3.25mm)Operating Temperature-55°C ~ 125°C	Series	Tiger Claw? BCS
StyleBoard to BoardStyleBoard to BoardNumber of Positions49Number of Positions Loaded48Pitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingIoµin (0.25µm)Insulation Height0.290" (7.37mm)Contact Length - Post55°C ~ 125°C	Connector Type	Receptacle, Pass Through
Number of Positions 49 Number of Positions Loaded 48 Pitch - Mating 0.100" (2.54mm) Number of Rows 1 Row Spacing - Mating - Mounting Type Through Hole Termination Solder Fastening Type Push-Pull Contact Finish - Mating Gold Contact Finish Thickness - Mating Jupin (0.25µm) Insulation Color Black Insulation Height 0.290" (7.37mm) Operating Temperature -55°C ~ 125°C	Contact Type	Female Socket
Number of Positions Loaded48Pitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingIlpuin (0.25µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.128" (3.25mm)Operating Temperature-55°C ~ 125°C	Style	Board to Board
Pitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingBlackInsulation Color0.290" (7.37mm)Contact Length - Post0.128" (3.25mm)Operating Temperature55°C ~ 125°C	Number of Positions	49
Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.128" (3.25mm)Operating Temperature-55°C ~ 125°C	Number of Positions Loaded	48
Row Spacing - Mating-Row Spacing - MatingThrough HoleMounting TypeSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingI/uin (0.25µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.128" (3.25mm)Operating Temperature-55°C ~ 125°C	Pitch - Mating	0.100" (2.54mm)
Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.128" (3.25mm)Operating Temperature-55°C ~ 125°C	Number of Rows	1
TerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.128" (3.25mm)Operating Temperature-55°C ~ 125°C	Row Spacing - Mating	-
Fastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.128" (3.25mm)Operating Temperature-55°C ~ 125°C	Mounting Type	Through Hole
Contact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.128" (3.25mm)Operating Temperature-55°C ~ 125°C	Termination	Solder
Contact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.128" (3.25mm)Operating Temperature-55°C ~ 125°C	Fastening Type	Push-Pull
Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.128" (3.25mm)Operating Temperature-55°C ~ 125°C	Contact Finish - Mating	Gold
Insulation Height0.290" (7.37mm)Contact Length - Post0.128" (3.25mm)Operating Temperature-55°C ~ 125°C	Contact Finish Thickness - Mating	10µin (0.25µm)
Contact Length - Post0.128" (3.25mm)Operating Temperature-55°C ~ 125°C	Insulation Color	Black
Operating Temperature $-55^{\circ}C \sim 125^{\circ}C$	Insulation Height	0.290" (7.37mm)
	Contact Length - Post	0.128" (3.25mm)
Material Flammability Rating UL94 V-0	Operating Temperature	-55°C ~ 125°C
	Material Flammability Rating	UL94 V-0

Contact Finish - Post	Tin
Mated Stacking Heights	-
Ingress Protection	-
Features	-
	Report errors?

BCS-149-L-S-PE-003 Guarantees



Quality Guarantees


We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

BCS-149-L-S-PE-003 Payment Methods

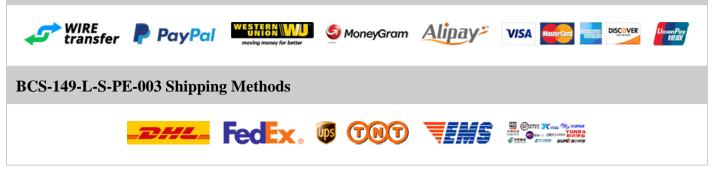

If you have any question about BCS-149-L-S-PE-003, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com