

BKS-113-01-F-V-A-TR

BKS-113-01-F-V-A-TR Information

Heisener.com	Part Number Manufacturer Category Description Package	BKS-113-01-F-V-A-TR Samtec Inc. Connectors, Interconnects Rectangular Connectors - Headers, Receptacles, Female Sockets 1MM SURFACE MOUNT SOCKET	
For Reference Only		For the pricing/inventory/lead time, please contact	
		Website: https://www.heisener.com E-mail: salesdept@heisener.com	Request a Quote

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



BKS-113-01-F-V-A-TR Specifications

Manufacturer Part Number BKS-113-01-F-V-A-TR Manufacturer Samtec Inc. Category Connectors, Interconnects Rectangular Connectors - Headers, Receptacles, Female Sockets Rectangular Connectors - Headers, Receptacles, Female Sockets Package - Series BKS Connector Type Socket Contact Type Socket Sottat Type Board to Board Number of Positions 13 Number of Positions Loaded All Pitch - Mating 0.039" (1.00mm) Number of Rows 2 Row Spacing - Mating Solder Mounting Type Surface Mount Termination Solder Fastening Type Push-Pull Contact Finish - Mating Gold Contact Finish Thickness - Mating Juin (0.08µm) Insulation Color Black		
CategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesBKSConnector TypeSocketContact TypeFemale SocketStyleBoard to BoardNumber of PositionsI3Number of Positions LoadedJanogen (Janogen	Manufacturer Part Number	BKS-113-01-F-V-A-TR
NumberRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesBKSConnector TypeSocketContact TypeBoard to BoardStyleBoard to BoardNumber of Positions13Number of Positions LoadedAllPitch - Mating0.039" (1.00mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeSolderFarminationSolderFastening TypeOslderContact Finish - MatingGoldContact Finish - MatingBiak	Manufacturer	Samtec Inc.
Package-SeriesBKSContect TypeSocketContact TypeFemale SocketStyleBoard to BoardNumber of Positions13Number of Positions LoadedAllPitch - Mating0.039" (1.00mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeSurface MountFarminationSolderFastening TypeGoldContact Finish - MatingGoldInsulation ColorBlack	Category	Connectors, Interconnects
SeriesBKSConnector TypeSocketContact TypeFemale SocketStyleBoard to BoardNumber of Positions13Number of Positions LoadedAllPitch - Mating0.039" (1.00mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeSurface MountFerminationSolderContact Finish - MatingGoldContact Finish - MatingGoldInsulation ColorBlack		Rectangular Connectors - Headers, Receptacles, Female Sockets
Connector TypeSocketContact TypeFemale SocketStyleBoard to BoardNumber of Positions13Number of Positions LoadedAllPitch - Mating0.039" (1.00mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeSurface MountFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingBiack	Package	-
Contact TypeFemale SocketStyleBoard to BoardNumber of Positions13Number of Positions LoadedAllPitch - Mating0.039" (1.00mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeSurface MountFastening TypeSolderFontact Finish - MatingGoldContact Finish - MatingSini (0.08µm)Insulation ColorBlack	Series	BKS
StyleBoard to BoardNumber of Positions13Number of Positions LoadedAllPitch - Mating0.039" (1.00mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldIonat Finish Thickness - MatingBlack	Connector Type	Socket
Number of Positions13Number of Positions LoadedAllPitch - Mating0.039" (1.00mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingJµin (0.08µm)Insulation ColorBlack	Contact Type	Female Socket
Number of Positions LoadedAllPitch - Mating0.039" (1.00mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldKontact Finish Thickness - MatingBlack	Style	Board to Board
Pitch - Mating0.039" (1.00mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldKontact Finish Thickness - MatingJin (0.08µm)BackBack	Number of Positions	13
Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating3µin (0.08µm)Insulation ColorBlack	Number of Positions Loaded	All
Row Spacing - Mating0.100" (2.54mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingJuin (0.08µm)Insulation ColorBlack	Pitch - Mating	0.039" (1.00mm)
Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating3µin (0.08µm)Insulation ColorBlack	Number of Rows	2
TerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating3µin (0.08µm)Insulation ColorBlack	Row Spacing - Mating	0.100" (2.54mm)
Fastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingJµin (0.08µm)Insulation ColorBlack	Mounting Type	Surface Mount
Contact Finish - MatingGoldContact Finish Thickness - Mating3µin (0.08µm)Insulation ColorBlack	Termination	Solder
Contact Finish Thickness - Mating3μin (0.08μm)Insulation ColorBlack	Fastening Type	Push-Pull
Insulation Color Black	Contact Finish - Mating	Gold
	Contact Finish Thickness - Mating	3μin (0.08μm)
Insulation Height 0.084" (2.14mm)	Insulation Color	Black
	Insulation Height	0.084" (2.14mm)
Contact Length - Post -	Contact Length - Post	-
Operating Temperature $-55^{\circ}C \sim 125^{\circ}C$	Operating Temperature	-55°C ~ 125°C
Material Flammability Rating UL94 V-0	Material Flammability Rating	UL94 V-0

Contact Finish - Post	Tin	
Mated Stacking Heights	4.14mm, 4.5mm, 5mm, 6mm, 7mm	
Ingress Protection	-	
Features	-	
	I	Report errors?

BKS-113-01-F-V-A-TR Guarantees



Quality Guarantees


We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

BKS-113-01-F-V-A-TR Payment Methods

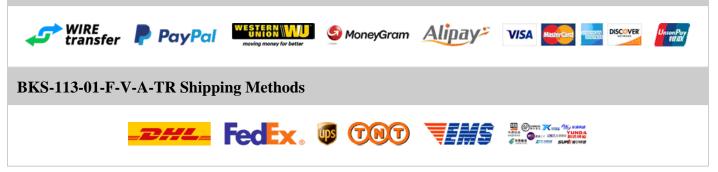

If you have any question about BKS-113-01-F-V-A-TR, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com