

# BSW-123-24-G-M

### **BSW-123-24-G-M Information**

|  | Part Number  | BSW-123-24-G-M  |                 |
|--|--------------|---|-----------------|
| Contraction of the second seco | Manufacturer |   |                 |
|  | Category     | Connectors, Interconnects<br>Rectangular Connectors - Headers, Receptacles,<br>Female Sockets |                 |
|  | Description  | BOTTOM MOUNT STRIPS   | 4-141 (2014)    |
|  | Package      | -   | 回游交叛            |
| For Reference Only   |              | For the pricing/inventory/lead time, please contact   |                 |
|  |              | us<br>Website: https://www.heisener.com<br>E-mail: salesdept@heisener.com                     | Request a Quote |

## **Certified Quality**

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



# **BSW-123-24-G-M Specifications**

| Manufacturer Part Number          | BSW-123-24-G-M  |
|-----------------------------------|---|
| Manufacturer                      | Samtec Inc.   |
| Category                          | Connectors, Interconnects                                     |
|                                   | Rectangular Connectors - Headers, Receptacles, Female Sockets |
| Package                           | -   |
| Series                            | BSW   |
| Connector Type                    | Receptacle, Breakaway   |
| Contact Type                      | Female Socket   |
| Style                             | Board to Board  |
| Number of Positions               | 23  |
| Number of Positions Loaded        | All   |
| Pitch - Mating                    | 0.100" (2.54mm)   |
| Number of Rows                    | 1   |
| Row Spacing - Mating              | -   |
| Mounting Type                     | Through Hole, Bottom Mount                                    |
| Termination                       | Solder  |
| Fastening Type                    | Push-Pull   |
| Contact Finish - Mating           | Gold  |
| Contact Finish Thickness - Mating | 20µin (0.51µm)  |
| Insulation Color                  | Black   |
| Insulation Height                 | 0.350" (8.89mm)   |
| Contact Length - Post             | 0.125" (3.18mm)   |
| Operating Temperature             | -55°C ~ 125°C   |
| Material Flammability Rating      | UL94 V-0  |
|                                   |   |

| Contact Finish - Post  | Tin            |
|------------------------|----------------|
| Mated Stacking Heights | -              |
| Ingress Protection     | -              |
| Features               | -              |
|                        | Report errors? |

### **BSW-123-24-G-M Guarantees**



#### **Quality Guarantees**


We provide 90 days warranty. \* If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



#### **Service Guarantees**

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

#### **BSW-123-24-G-M Payment Methods**

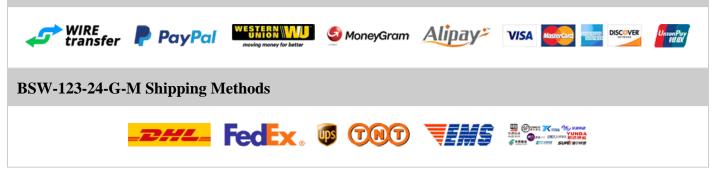

If you have any question about BSW-123-24-G-M, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com