

# **BSW-128-04-T-M**

### **BSW-128-04-T-M Information**

Heisener.com	Part Number	BSW-128-04-T-M	
	Manufacturer	Samtec Inc.	
	Category	Connectors, Interconnects Rectangular Connectors - Headers, Receptacles, Female Sockets	
	Description	BOTTOM MOUNT STRIPS	
	Package	-	回致受叛
For Reference Only		For the pricing/inventory/lead time, please contact	
		us Website: https://www.heisener.com E-mail: salesdept@heisener.com	Request a Quote

## **Certified Quality**

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



## **BSW-128-04-T-M Specifications**

Manufacturer Part Number BSW-128-04-T-M   Manufacturer Santec Inc.   Category Connectors, Interconnects   Rectangular Connectors - Headers, Receptacles, Female Sockets Rectangular Connectors - Headers, Receptacles, Female Sockets   Package -   Series BSW   Connector Type Receptacle, Breakaway   Connact Type Female Socket   Style Board to Board   Number of Positions Sal   Number of Positions Loaded All   Pitch - Mating 0.100" (2.54mm)   Number of Rows 1   Row Spacing - Mating -   Mounting Type Through Hole, Bottom Mount   Termination Solder   Fastening Type Push-Pull   Contact Finish - Mating -   Contact Finish Thickness - Mating -   Insulation Color Black   Insulation Fleight 0.300" (8.89mm)   Contact Length - Post 0.125" (3.18mm)   Operating Temperature -55" C ~ 105"C		
CategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesBSWConnector TypeReceptacle, BreakawayContact TypeBoard to BoardNumber of Positions28Number of Positions LoadedAllNumber of Rows1Number of Rows1Number of Rows1Number of RowsSolderNumber of RowsSolderNumber of RowsSolderNumber of Rows1Number of RowsSolderNumber of RowsSolderStating TypeSolderStating TypeSolderSolder Contact Finish Finkenses - MatingSolderInsulation ColorBlackInsulation HeightSolor (Samm)Solder SolderSolor (Samm)Solder SolderSolderSolder SolderSolderSolde	Manufacturer Part Number	BSW-128-04-T-M
Rectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesBSWConnector TypeReceptacle, BreakawayContact TypeFemale SocketStyleBoard to BoardNumber of Positions28Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough Hole, Bottom MountTerminationSolderFastening TypePush-PullContact Finish - Mating-Insulation ColorBlackInsulation Height0.350" (8.89mm)Contact Length - Post0.125" (3.18mm)Operating Temperature-55°C ~ 105°C	Manufacturer	Samtec Inc.
Package-SeriesBSWConnector TypeReceptacle, BreakawayContact TypeFemale SocketStyleBoard to BoardNumber of Positions28Number of Positions LoadedAllPitch - Mating0.100° (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeodderTerminationSolderFastening TypeUsh-PullContact Finish - Mating-Contact Finish - Mating-Innulation ColorBlackInsulation ColorBlackInsulation Height0.350° (8.89mm)Contact Length - Post0.125° (3.18mm)Operating Temperature55° C~ 105°C	Category	Connectors, Interconnects
SeriesBSWConnector TypeReceptacle, BreakawayContact TypeFemale SocketStyleBoard to BoardNumber of Positions28Number of Positions LoadedAllPitch - Mating0.100° (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough Hole, Bottom MountTerminationSolderFastening Type9ush-PullContact Finish - Mating-Insulation ColorBlackInsulation Height0.50° (8.89mm)Contact Length - Post0.125° (3.18mm)Operating Temperature-5°C ~ 105°C		Rectangular Connectors - Headers, Receptacles, Female Sockets
Connector TypeReceptacle, BreakawayContact TypeFemale SocketStyleBoard to BoardNumber of Positions28Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough Hole, Bottom MountPreminationSolderContact Finish - Mating-Contact Finish - Mating-Insulation ColorBlackInsulation Height0.300" (8.89mm)Contact Length - Post.15°C ~ 105°C	Package	-
Contact TypeFemale SocketStyleBoard to BoardNumber of Positions28Number of Positions LoadedAllPitch - Mating0.100° (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough Hole, Bottom MountTerminationSolderFastening TypePush-PullContact Finish - Mating-Innulation ColorBlackInsulation Height0.350° (8.89mm)Contact Length - Post0.155° C ~ 105°C	Series	BSW
StyleBoard to BoardStyleBoard to BoardNumber of Positions28Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough Hole, Bottom MountTerminationSolderFastening TypePush-PullContact Finish - Mating-Insulation ColorBlackInsulation Height0.350" (8.89mm)Contact Length - Post0.125" (3.18mm)Operating Temperature-55°C ~ 105°C	Connector Type	Receptacle, Breakaway
Number of Positions 28   Number of Positions Loaded All   Pitch - Mating 0.100" (2.54mm)   Number of Rows 1   Row Spacing - Mating -   Mounting Type Through Hole, Bottom Mount   Termination Solder   Fastening Type Push-Pull   Contact Finish - Mating -   Insulation Color Black   Insulation Height 0.350" (8.89mm)   Contact Length - Post 0.125" (3.18mm)	Contact Type	Female Socket
Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough Hole, Bottom MountTerminationSolderFastening TypePush-PullContact Finish - Mating-Insulation ColorBlackInsulation Height0.350" (8.89mm)Contact Length - Post0.125" (3.18mm)Operating Temperature-55°C ~ 105°C	Style	Board to Board
Pitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough Hole, Bottom MountTerminationSolderFastening TypePush-PullContact Finish - Mating-Roust ColorBlackInsulation Color0.350" (8.89mm)Contact Length - Post0.125" (3.18mm)Operating Temperature55°C ~ 105°C	Number of Positions	28
Number of Rows1Row Spacing - Mating-Mounting TypeThrough Hole, Bottom MountTerminationSolderFastening TypePush-PullContact Finish - MatingTinContact Finish Thickness - Mating-Insulation ColorBlackInsulation Height0.350" (8.89mm)Contact Length - Post0.125" (3.18mm)Operating Temperature-55°C ~ 105°C	Number of Positions Loaded	All
Row Spacing - Mating-Mounting TypeThrough Hole, Bottom MountTerminationSolderFastening TypePush-PullContact Finish - Mating-Contact Finish Thickness - Mating-Insulation ColorBlackInsulation Height0.350" (8.89mm)Contact Length - Post0.125" (3.18mm)Operating Temperature-55°C ~ 105°C	Pitch - Mating	0.100" (2.54mm)
Mounting TypeThrough Hole, Bottom MountTerminationSolderFastening TypePush-PullContact Finish - MatingTinContact Finish Thickness - Mating-Insulation ColorBlackInsulation Height0.350" (8.89mm)Contact Length - Post0.125" (3.18mm)Operating Temperature-55°C ~ 105°C	Number of Rows	1
TerminationSolderFastening TypePush-PullContact Finish - MatingTinContact Finish Thickness - Mating-Insulation ColorBlackInsulation Height0.350" (8.89mm)Contact Length - Post0.125" (3.18mm)Operating Temperature-55°C ~ 105°C	Row Spacing - Mating	-
Fastening TypePush-PullContact Finish - MatingTinContact Finish Thickness - Mating-Insulation ColorBlackInsulation Height0.350" (8.89mm)Contact Length - Post0.125" (3.18mm)Operating Temperature-55°C ~ 105°C	Mounting Type	Through Hole, Bottom Mount
Contact Finish - MatingTinContact Finish Thickness - Mating-Insulation ColorBlackInsulation Height0.350" (8.89mm)Contact Length - Post0.125" (3.18mm)Operating Temperature-55°C ~ 105°C	Termination	Solder
Contact Finish Thickness - Mating-Insulation ColorBlackInsulation Height0.350" (8.89mm)Contact Length - Post0.125" (3.18mm)Operating Temperature-55°C ~ 105°C	Fastening Type	Push-Pull
Insulation ColorBlackInsulation Height0.350" (8.89mm)Contact Length - Post0.125" (3.18mm)Operating Temperature-55°C ~ 105°C	Contact Finish - Mating	Tin
Insulation Height 0.350" (8.89mm)   Contact Length - Post 0.125" (3.18mm)   Operating Temperature -55°C ~ 105°C	Contact Finish Thickness - Mating	-
Contact Length - Post0.125" (3.18mm)Operating Temperature-55°C ~ 105°C	Insulation Color	Black
Operating Temperature $-55^{\circ}C \sim 105^{\circ}C$	Insulation Height	0.350" (8.89mm)
	Contact Length - Post	0.125" (3.18mm)
	Operating Temperature	-55°C ~ 105°C
Material Flammability Rating UL94 V-0	Material Flammability Rating	UL94 V-0

Contact Finish - Post	Tin
Mated Stacking Heights	-
Ingress Protection	-
Features	-
	Report errors?

### **BSW-128-04-T-M Guarantees**



#### **Quality Guarantees**


We provide 90 days warranty. \* If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



#### **Service Guarantees**

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

#### **BSW-128-04-T-M Payment Methods**

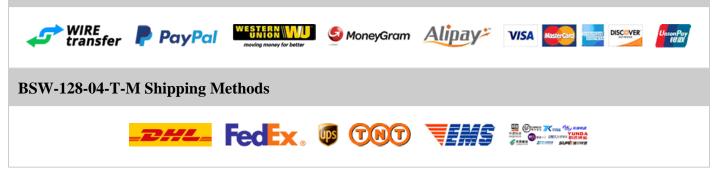

If you have any question about BSW-128-04-T-M, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com