

C1Q 1 Information



Part Number	C1Q 1
Manufacturer	Bel Fuse Inc.
Category	Circuit Protection Fuses
Description	FUSE BOARD MOUNT 1A 125VAC 63VDC
Package	1206 (3216 Metric)
	For the pricing/inventory/lead time, please contact us Website: https://www.heisener.com E-mail: salesdept@heisener.com



Request a Quote

For Reference Only

Certified Quality


Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



C1Q 1 Specifications

Manufacturer Bel Fuse Inc. Category Circuit Protection Fuses Fuses Package 1206 (3216 Metric) Series C1Q Fuse Type Board Mount (Cartridge Style Excluded) Current Rating IA Voltage Rating - AC 125V Voltage Rating - DC 63V Response Time Fast Package / Case 1206 (3216 Metric) Mounting Type Surface Mount Breaking Capacity @ Rated Voltage 125V Mounting Type Surface Mount Breaking Capacity @ Rated Voltage 1206 (3216 Metric) Mounting Type Surface Mount Breaking Capacity @ Rated Voltage 100A AC, 50A DC Approvals CSA, cULus Operating Temperature -55°C ~ 125°C Color -			
CategoryCircuit ProtectionFusesPackage1206 (3216 Metric)SeriesClQFuse TypeBoard Mount (Catridge Style Excluded)Fuse TypeBoard Mount (Catridge Style Excluded)Current Rating1AVoltage Rating - AC125VVoltage Rating - DC63VResponse TimeFastPackage / Case1206 (3216 Metric)Mounting TypeSurface MountBreaking Capacity @ Rated Voltage100A AC, 50A DCApprovalsCSA, cULusOperating Temperature-55°C ~ 125°CColor-Size / Dimension0.126" L x 0.062" W x 0.023" H (3.20mm x 1.58mm x 0.58mm)	Manufacturer Part Number	CIQ 1	
Interformation Fuses Package 1206 (3216 Metric) Series C1Q Fuse Type Board Mount (Cartridge Style Excluded) Current Rating 1A Voltage Rating - AC 125V Voltage Rating - DC 63V Response Time Fast Package / Case 1206 (3216 Metric) Mounting Type Surface Mount Breaking Capacity @ Rated Voltage 100A AC, 50A DC Melting 12t 0.035 Approvals CSA, cULus Operating Temperature -55°C ~ 125°C Color - Size / Dimension 0.126" L x 0.062" W x 0.023" H (3.20mm x 1.58mm x 0.58mm)	Manufacturer	Bel Fuse Inc.	
Package1206 (3216 Metric)SeriesC1QFuse TypeBoard Mount (Cartridge Style Excluded)Fuse TypeIACurrent Rating1AVoltage Rating - AC63VVoltage Rating - DC63VResponse TimeFastPackage / Case1206 (3216 Metric)Mounting TypeSurface MountBreaking Capacity @ Rated Voltage100A AC, 50A DCMelting I2t0.035Operating Temperature-55°C ~ 125°CColor-Size / Dimension0.126" L x 0.062" W x 0.023" H (3.20mm x 1.58mm x 0.58mm)	Category	Circuit Protection	
Series C1Q Fuse Type Board Mount (Cartridge Style Excluded) Current Rating 1A Voltage Rating - AC 125V Voltage Rating - DC 63V Response Time Fast Package / Case 1206 (3216 Metric) Mounting Type Surface Mount Breaking Capacity @ Rated Voltage 100A AC, 50A DC Melting I2t 0.035 Operating Temperature -55°C ~ 125°C Color - Size / Dimension 0.126" L x 0.062" W x 0.023" H (3.20mm x 1.58mm x 0.58mm)		Fuses	
Fuse TypeBoard Mount (Cartridge Style Excluded)Current Rating1AVoltage Rating - AC125VVoltage Rating - DC63VResponse TimeFastPackage / Case1206 (3216 Metric)Mounting TypeSurface MountBreaking Capacity @ Rated Voltage100A AC, 50A DCMelting I2t0.035ApprovalsCSA, cULusOperating Temperature-55°C ~ 125°CColor-Size / Dimension0.126" L x 0.062" W x 0.023" H (3.20mm x 1.58mm x 0.58mm)	Package	1206 (3216 Metric)	
Current RatingIAVoltage Rating - AC125VVoltage Rating - DC63VResponse TimeFastPackage / Case1206 (3216 Metric)Mounting TypeSurface MountBreaking Capacity @ Rated Voltage100A AC, 50A DCMelting I2t0.035ApprovalsCSA, cULusOperating Temperature-55°C ~ 125°CColor-Size / Dimension0.126" L x 0.062" W x 0.023" H (3.20mm x 1.58mm x 0.58mm)	Series	C1Q	
Voltage Rating - AC125VVoltage Rating - DC63VResponse TimeFastPackage / Case1206 (3216 Metric)Mounting TypeSurface MountBreaking Capacity @ Rated Voltage100A AC, 50A DCMelting I2t0.035ApprovalsCSA, cULusOperating Temperature-55°C ~ 125°CColor-Size / Dimension0.126" L x 0.062" W x 0.023" H (3.20mm x 1.58mm x 0.58mm)	Fuse Type	Board Mount (Cartridge Style Excluded)	
Voltage Rating - DC63VResponse TimeFastPackage / Case1206 (3216 Metric)Mounting TypeSurface MountBreaking Capacity @ Rated Voltage100A AC, 50A DCMelting I2t0.035ApprovalsCSA, cULusOperating Temperature-55°C ~ 125°CColor-Size / Dimension0.126" L x 0.062" W x 0.023" H (3.20mm x 1.58mm x 0.58mm)	Current Rating	1A	
Response Time Fast Package / Case 1206 (3216 Metric) Mounting Type Surface Mount Breaking Capacity @ Rated Voltage 100A AC, 50A DC Melting I2t 0.035 Approvals CSA, cULus Operating Temperature -55°C ~ 125°C Color - Size / Dimension 0.126" L x 0.062" W x 0.023" H (3.20mm x 1.58mm x 0.58mm)	Voltage Rating - AC	125V	
Package / Case1206 (3216 Metric)Mounting TypeSurface MountBreaking Capacity @ Rated Voltage100A AC, 50A DCMelting I2t0.035ApprovalsCSA, cULusOperating Temperature-55°C ~ 125°CColor-Size / Dimension0.126" L x 0.062" W x 0.023" H (3.20mm x 1.58mm x 0.58mm)	Voltage Rating - DC	63V	
Mounting TypeSurface MountBreaking Capacity @ Rated Voltage100A AC, 50A DCMelting I2t0.035ApprovalsCSA, cULusOperating Temperature-55°C ~ 125°CColor-Size / Dimension0.126" L x 0.062" W x 0.023" H (3.20mm x 1.58mm x 0.58mm)	Response Time	Fast	
Breaking Capacity @ Rated Voltage100A AC, 50A DCMelting I2t0.035ApprovalsCSA, cULusOperating Temperature-55°C ~ 125°CColor-Size / Dimension0.126" L x 0.062" W x 0.023" H (3.20mm x 1.58mm x 0.58mm)	Package / Case	1206 (3216 Metric)	
Melting I2t 0.035 Approvals CSA, cULus Operating Temperature -55°C ~ 125°C Color - Size / Dimension 0.126" L x 0.062" W x 0.023" H (3.20mm x 1.58mm x 0.58mm)	Mounting Type	Surface Mount	
ApprovalsCSA, cULusOperating Temperature-55°C ~ 125°CColor-Size / Dimension0.126" L x 0.062" W x 0.023" H (3.20mm x 1.58mm x 0.58mm)	Breaking Capacity @ Rated Voltage	100A AC, 50A DC	
Operating Temperature -55°C ~ 125°C Color - Size / Dimension 0.126" L x 0.062" W x 0.023" H (3.20mm x 1.58mm x 0.58mm)	Melting I2t	0.035	
Color - Size / Dimension 0.126" L x 0.062" W x 0.023" H (3.20mm x 1.58mm x 0.58mm)	Approvals	CSA, cULus	
Size / Dimension 0.126" L x 0.062" W x 0.023" H (3.20mm x 1.58mm x 0.58mm)	Operating Temperature	-55°C ~ 125°C	
	Color	-	
Report errors?	Size / Dimension	0.126" L x 0.062" W x 0.023" H (3.20mm x 1.58mm x 0.58mm)	
			Report errors?

C1Q 1 Guarantees

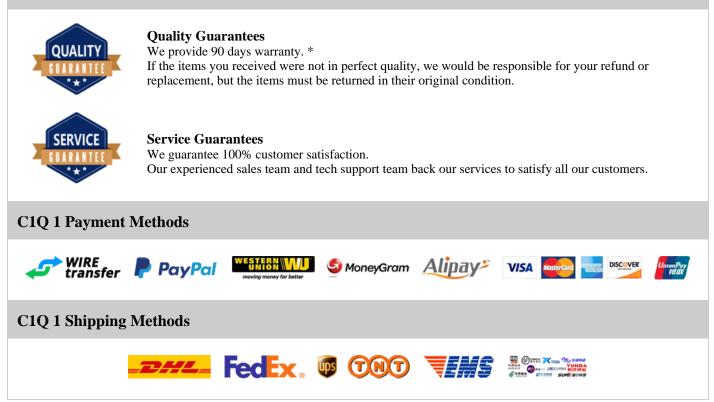

If you have any question about C1Q 1, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com