


## C321C562F3G5TA

#### C321C562F3G5TA Information



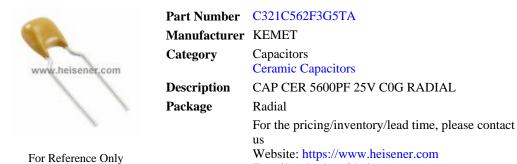

Request a Quote

#### For Reference Only

## **Certified Quality**

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



## C321C562F3G5TA Specifications

| Manufacturer Part NumberC321C562F3G5TAManufacturerKEMETCategoryCapacitorsCategoryCeramic CapacitorsPackageRadialSeriesGoldmax, 300Capacitance5600pFColerance±1%Voltage - Rated25VCemperature CoefficientC0G, NPOOperating Temperature-55°C ~ 125°CFeaturesLow ESLRatings-ApplicationsBypass, Decoupling |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| CategoryCapacitorsCaranic CapacitorsPackageRadialPackageGoldmax, 300Capacitance5600pFColerance±1%Yoltage - Rated25VComperature CoefficientCOG, NPOOperating Temperature-55°C ~ 125°CFeaturesLow ESLRatings-ApplicationsBypas, Decoupling                                                                |
| Ceramic CapacitorsPackageRadialPackageGoldmax, 300Capacitance5600pFFolerance±1%Voltage - Rated25VSemperature CoefficientCOG, NP0Operating Temperature-55°C ~ 125°CSeaturesLow ESLRatings-ApplicationsBypass, Decoupling                                                                                 |
| PackageRadialPackageGoldmax, 300Capacitance5600pFColerance±1%Voltage - Rated25VComperature CoefficientCOG, NP0Operating Temperature-55°C ~ 125°CPeaturesLow ESLRatings-ApplicationsBypass, Decoupling                                                                                                   |
| SeriesGoldmax, 300Capacitance5600pFFolerance±1%Voltage - Rated25VFemperature CoefficientCOG, NP0Operating Temperature-55°C ~ 125°CFeaturesLow ESLRatings-ApplicationsBypass, Decoupling                                                                                                                 |
| Capacitance5600pFColerance±1%Yoltage - Rated25VComperature CoefficientCOG, NPOOperating Temperature-55°C ~ 125°CSeaturesLow ESLRatings-ApplicationsBypass, Decoupling                                                                                                                                   |
| Folerance±1%Voltage - Rated25VFemperature CoefficientCOG, NPOOperating Temperature-55°C ~ 125°CFeaturesLow ESLRatings-ApplicationsBypass, Decoupling                                                                                                                                                    |
| Voltage - Rated25VCemperature CoefficientCOG, NPOOperating Temperature-55°C ~ 125°CSeaturesLow ESLRatings-ApplicationsBypass, Decoupling                                                                                                                                                                |
| Femperature CoefficientCOG, NPOOperating Temperature-55°C ~ 125°CFeaturesLow ESLRatings-ApplicationsBypass, Decoupling                                                                                                                                                                                  |
| Deperating Temperature-55°C ~ 125°CGeaturesLow ESLRatings-ApplicationsBypass, Decoupling                                                                                                                                                                                                                |
| FeaturesLow ESLRatings-ApplicationsBypass, Decoupling                                                                                                                                                                                                                                                   |
| Ratings-ApplicationsBypass, Decoupling                                                                                                                                                                                                                                                                  |
| Applications Bypass, Decoupling                                                                                                                                                                                                                                                                         |
|                                                                                                                                                                                                                                                                                                         |
|                                                                                                                                                                                                                                                                                                         |
| Failure Rate -                                                                                                                                                                                                                                                                                          |
| Mounting Type Through Hole                                                                                                                                                                                                                                                                              |
| Package / Case Radial                                                                                                                                                                                                                                                                                   |
| Size / Dimension     0.200" L x 0.125" W (5.08mm x 3.18mm)                                                                                                                                                                                                                                              |
| Height - Seated (Max)     0.260" (6.60mm)                                                                                                                                                                                                                                                               |
| Thickness (Max) -                                                                                                                                                                                                                                                                                       |
| Lead Spacing 0.250" (6.35mm)                                                                                                                                                                                                                                                                            |
| Lead Style Formed Leads - Kinked                                                                                                                                                                                                                                                                        |
| Report errors?                                                                                                                                                                                                                                                                                          |

E-mail: salesdept@heisener.com

#### C321C562F3G5TA Guarantees



Quality Guarantees

We provide 90 days warranty. \* If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.

# SERVICE EUARANTEE

#### **Service Guarantees**

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

#### C321C562F3G5TA Payment Methods





If you have any question about C321C562F3G5TA, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com