


CA3106E16-10PF80A206

CA3106E16-10PF80A206 Information

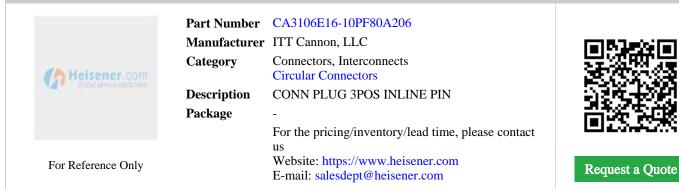

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



CA3106E16-10PF80A206 Specifications

Manufacturer ITT Cannon, LLC Category Connectors, Interconnects Circular Connectors Circular Connectors Package - Series MIL-DTL-5015, CA Connector Type Plug, Male Pins Number of Positions 3 Shell Size - Insert 16-10 Mounting Type Free Hanging (In-Line) Termination Crimp Stell Size, MIL - Nounting Type Threaded Orientation N(Normal) Ingress Protection Silver Shell Material, Finish Aluminum Alloy, Zinc Plated, Black Contact Finish Silver Features Strain Relief		
CategoryConnectors, Interconnects Circular ConnectorsPackage-SeriesMIL-DTL-5015, CAConnector TypePlug, Male PinsNumber of Positions3Shell Size - Insert16-10Shell Size, MIL-Mounting TypeFree Hanging (In-Line)TerminationCrimpFastening TypeThreadedOrientationN(Normal)Ingress ProtectionN(Normal)Shell Material, FinishAluminum Alloy, Zinc Plated, BlackContact FinishSilverFeaturesStrain ReliefVoltage - Rated50VCurrent Rating41A	Manufacturer Part Number	CA3106E16-10PF80A206
Circular ConnectorsPackage-SeriesMIL-DTL-5015, CAConnector TypePlug, Male PinsNumber of Positions3Shell Size - Insert16-10Shell Size, MIL-Mounting TypeFree Hanging (In-Line)TerminationCrimpFastening TypeThreadedOrientationN (Normal)Ingress ProtectionSilverShell Material, FinishAluminum Alloy, Zinc Plated, BlackContact FinishStrain ReliefVoltage - Rated50VCurrent Rating41A	Manufacturer	ITT Cannon, LLC
Package-SeriesMIL-DTL-5015, CAConnector TypePlug, Male PinsNumber of Positions3Shell Size - Insert16-10Shell Size, MIL-Mounting TypeFree Hanging (In-Line)Mounting TypeCrimpFastening TypeN (Normal)Orientation1965 - Dust Tight, Water ResistantShell Material, FinishSilverShell Material, FinishSilverFoaturesSilverVoltage - Rated50VCurrent Rating41A	Category	Connectors, Interconnects
SeriesMIL-DTL-5015, CAConnector TypePlug, Male PinsNumber of Positions3Shell Size - Insert16-10Shell Size, MIL-Mounting TypeFree Hanging (In-Line)TerminationCrimpFastening TypeThreadedOrientationN (Normal)Ingress ProtectionIP65 - Dust Tight, Water ResistantShell Material, FinishAluminum Alloy, Zinc Plated, BlackFeaturesStrain ReliefVoltage - Rated50VCurrent Rating41A		Circular Connectors
Connector TypePlug, Male PinsNumber of Positions3Shell Size - Insert16-10Shell Size, MIL-Mounting TypeFree Hanging (In-Line)TerminationCrimpFastening TypeThreadedOrientationN (Normal)Ingress ProtectionIP65 - Dust Tight, Water ResistantShell Material, FinishSilverFeaturesStrin ReliefVoltage - Rated50VCurrent Rating41A	Package	-
Number of Positions3Shell Size - Insert16-10Shell Size, MIL-Mounting TypeFree Hanging (In-Line)TerminationCrimpFastening TypeThreadedOrientationN (Normal)Ingress ProtectionIP65 - Dust Tight, Water ResistantShell Material, FinishAluminum Alloy, Zinc Plated, BlackContact FinishSilverFeaturesStrain ReliefVoltage - Rated50VCurrent Rating41A	Series	MIL-DTL-5015, CA
Shell Size - Insert16-10Shell Size, MIL-Mounting TypeFree Hanging (In-Line)TerminationCrimpFastening TypeThreadedOrientationN (Normal)Ingress ProtectionIP65 - Dust Tight, Water ResistantShell Material, FinishAluminum Alloy, Zinc Plated, BlackContact FinishStrain ReliefVoltage - Rated50VCurrent Rating41A	Connector Type	Plug, Male Pins
Shell Size, MIL-Mounting TypeFree Hanging (In-Line)TerminationCrimpFastening TypeThreadedOrientationN (Normal)Ingress ProtectionIP65 - Dust Tight, Water ResistantShell Material, FinishAluminum Alloy, Zinc Plated, BlackContact FinishSilverFeaturesStrain ReliefVoltage - Rated50VKent Rating41A	Number of Positions	3
Mounting TypeFree Hanging (In-Line)TerminationCrimpFastening TypeThreadedOrientationN (Normal)Ingress ProtectionIP65 - Dust Tight, Water ResistantShell Material, FinishAluminum Alloy, Zinc Plated, BlackContact FinishSilverFeaturesStrain ReliefVoltage - Rated50VKurrent Rating41A	Shell Size - Insert	16-10
TerminationCrimpFastening TypeThreadedOrientationN (Normal)Ingress ProtectionIP65 - Dust Tight, Water ResistantShell Material, FinishAluminum Alloy, Zinc Plated, BlackContact FinishSilverFeaturesStrain ReliefVoltage - Rated50VCurrent Rating41A	Shell Size, MIL	-
Fastening TypeThreadedOrientationN (Normal)Ingress ProtectionIP65 - Dust Tight, Water ResistantShell Material, FinishAluminum Alloy, Zinc Plated, BlackContact FinishSilverFeaturesStrain ReliefVoltage - Rated50VCurrent Rating41A	Mounting Type	Free Hanging (In-Line)
OrientationN (Normal)Ingress ProtectionIP65 - Dust Tight, Water ResistantShell Material, FinishAluminum Alloy, Zinc Plated, BlackContact FinishSilverFeaturesStrain ReliefVoltage - Rated50VCurrent Rating41A	Termination	Crimp
Ingress ProtectionIP65 - Dust Tight, Water ResistantShell Material, FinishAluminum Alloy, Zinc Plated, BlackContact FinishSilverFeaturesStrain ReliefVoltage - Rated50VCurrent Rating41A	Fastening Type	Threaded
Shell Material, FinishAluminum Alloy, Zinc Plated, BlackContact FinishSilverFeaturesStrain ReliefVoltage - Rated50VCurrent Rating41A	Orientation	N (Normal)
Contact FinishSilverFeaturesStrain ReliefVoltage - Rated50VCurrent Rating41A	Ingress Protection	IP65 - Dust Tight, Water Resistant
FeaturesStrain ReliefVoltage - Rated50VCurrent Rating41A	Shell Material, Finish	Aluminum Alloy, Zinc Plated, Black
Voltage - Rated50VCurrent Rating41A	Contact Finish	Silver
Current Rating 41A	Features	Strain Relief
-	Voltage - Rated	50V
Report errors?	Current Rating	41A
		Report errors?

CA3106E16-10PF80A206 Guarantees



Quality Guarantees

We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.

SERVICE EUARANTEE

Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

If you have any question about CA3106E16-10PF80A206, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com