


CB10JB13R0

CB10JB13R0 Information

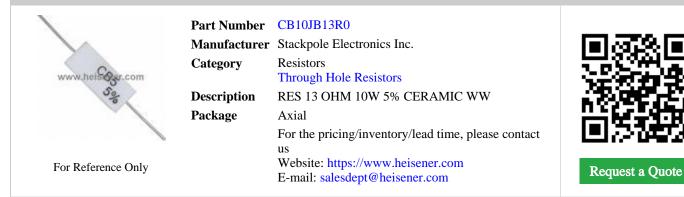

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



CB10JB13R0 Specifications

ManufacturerStackpole Electronics Inc.CategoryResistorsThrough Hole ResistorsPackageAxialSeriesCBResistance13 OhmsTolerance±5%Power (Watts)10WCompositionWirewoundFeaturesFlame Proof, Moisture Resistant, SafetyPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.374" Square x 1.890" L (9.50mm x 48.00mm)Height - Seated (Max)2Failure Rate1Failure Rate-Failure Rate-Stack Jong Mark-Stack Jong Mark-			
CategoryNoCategoryThrough Hole ResistorsPackageAxialPackageCBResistance13 OhmsTolerance±5%Power (Watts)10WCompositionWirewoundFeaturesFlame Proof, Moisture Resistant, SafetyPoperating Temperature>55°C ~ 275°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.374" Square x 1.890" L (9.50mm x 48.00mm)Height - Seated (Max)2Falure Rate1Falure Rate1 <td>Manufacturer Part Number</td> <td>CB10JB13R0</td> <td></td>	Manufacturer Part Number	CB10JB13R0	
Through Hole ResistorsPackageAxialSeriesCBResistance13 OhmsTolerance±5%Power (Watts)10WCompositionWirewoundFeaturesFlame Proof, Moisture Resistant, SafetyToperature Coefficient±200pm/°COperating Temperature-55°C ~ 275°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.374" Square x 1.890" L (9.50mm x 48.00mm)Height - Seated (Max)2Failure Rate-	Manufacturer	Stackpole Electronics Inc.	
PackageAxialSeriesCBResistance13 OhmsTolerance±5%Power (Watts)10WCompositionWirewoundFeaturesFlame Proof, Moisture Resistant, SafetyPoperating Temperature Coefficient±200ppm/°COperating Temperature-55°C ~ 275°CPackage / CaseAxialSupplier Device Package0.374" Square x 1.890" L (9.50mm x 48.00mm)Height - Seated (Max)2Aumber of Terminations2Failure Rate-	Category	Resistors	
SeriesCBResistance13 OhmsTolerance±5%Power (Watts)10WCompositionWirewoundFeaturesFlame Proof, Moisture Resistant, SafetyTemperature Coefficient±200ppm/°COperating Temperature-55°C ~ 275°CPackage / CaseAxialSupplier Device Package0.374" Square x 1.890" L (9.50mm x 48.00mm)Height - Seated (Max)2Palure Rate-		Through Hole Resistors	
Resistance13 OhmsTolerance±5%Power (Watts)10WCompositionWirewoundFeaturesFlame Proof, Moisture Resistant, SafetyTemperature Coefficient±200pm/°COperating Temperature-55°C ~ 275°CPackage / CaseAxialSupplier Device Package0.374" Square x 1.890" L (9.50mm x 48.00mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Package	Axial	
Tolerance±5%Power (Watts)10WCompositionWirewoundFeaturesFlame Proof, Moisture Resistant, SafetyTemperature Coefficient±200pm/°COperating Temperature-55°C ~ 275°CPackage / CaseAxialSupplier Device Package0.374" Square x 1.890" L (9.50mm x 48.00mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Series	СВ	
Power (Watts)10WCompositionWirewoundFeaturesFlame Proof, Moisture Resistant, SafetyTemperature Coefficient±200pm/°COperating Temperature-55°C ~ 275°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.374" Square x 1.890" L (9.50mm x 48.00mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Resistance	13 Ohms	
CompositionWirewoundFeaturesFlame Proof, Moisture Resistant, SafetyTemperature Coefficient±200ppm/°COperating Temperature-55°C ~ 275°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.374" Square x 1.890" L (9.50mm x 48.00mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Tolerance	$\pm 5\%$	
FeaturesFlame Proof, Moisture Resistant, SafetyTemperature Coefficient±200ppm/°COperating Temperature-55°C ~ 275°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.374" Square x 1.890" L (9.50mm x 48.00mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Power (Watts)	10W	
Temperature Coefficient±200ppm/°COperating Temperature-55°C ~ 275°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.374" Square x 1.890" L (9.50mm x 48.00mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Composition	Wirewound	
Operating Temperature-55°C ~ 275°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.374" Square x 1.890" L (9.50mm x 48.00mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Features	Flame Proof, Moisture Resistant, Safety	
Package / CaseAxialSupplier Device PackageAxialSize / Dimension0.374" Square x 1.890" L (9.50mm x 48.00mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Temperature Coefficient	± 200 ppm/°C	
Supplier Device PackageAxialSize / Dimension0.374" Square x 1.890" L (9.50mm x 48.00mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Operating Temperature	-55°C ~ 275°C	
NimeComparison0.374" Square x 1.890" L (9.50mm x 48.00mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Package / Case	Axial	
Height - Seated (Max)-Number of Terminations2Failure Rate-	Supplier Device Package	Axial	
Number of Terminations 2 Failure Rate -	Size / Dimension	0.374" Square x 1.890" L (9.50mm x 48.00mm)	
Failure Rate -	Height - Seated (Max)	-	
	Number of Terminations	2	
	Failure Rate	-	
Report errors?		R	eport errors?

CB10JB13R0 Guarantees



Quality Guarantees

We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.

SERVICE GUARANTEE

Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

CB10JB13R0 Payment Methods





If you have any question about CB10JB13R0, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com