


# CD19FA752GO3

## **CD19FA752GO3 Information**

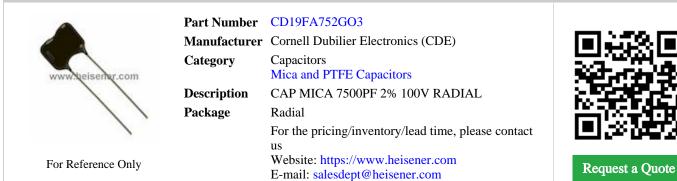

#### **Certified Quality**

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



# **CD19FA752GO3 Specifications**

Manufacturer   Cornell Dubilier Electronics (CDE)     Category   Capacitors     Mica and PTFE Capacitors   Mica and PTFE Capacitors     Package   Radial     Series   CD19     Capacitance   7500pF     Tolerance   ±2%     Voltage - Rated   100V     Dielectric Material   Mica     Operating Temperature   -55°C ~ 125°C     Mounting Type   Through Hole     Package / Case   Radial     Lead Spacing   0.343" (8.70mm)     Features   General Purpose     Size / Dimension   0.701" L x 0.339" W (17.80mm x 8.60mm)		
CategoryCapacitorsMica and PTFE CapacitorsPackageRadialPackageCD19Capacitance7500pFTolerance±2%Voltage - Rated100VDielectric MaterialMicaOperating Temperature-55°C ~ 125°CMounting TypeThrough HolePackage / CaseRadialLead Spacing0.343" (8.70mm)FeaturesGeneral PurposeSize / Dimension0.571" (14.50mm) X8.60mm)	Manufacturer Part Number	CD19FA752GO3
Mica and PTFE CapacitorsPackageRadialSeriesCD19Capacitance7500pFTolerance±2%Voltage - Rated100VDielectric MaterialMicaOperating Temperature-55°C ~ 125°CMounting TypeThrough HolePackage / CaseRadialLead Spacing0.343" (8.70mm)FeaturesGeneral PurposeSize / Dimension0.701" L x 0.339" W (17.80mm x 8.60mm)Height - Seated (Max)0.571" (14.50mm)	Manufacturer	Cornell Dubilier Electronics (CDE)
PackageRadialPackageCD19Capacitance7500pFTolerance±2%Voltage - Rated100VDielectric MaterialMicaOperating Temperature-55°C ~ 125°CMounting TypeThrough HolePackage / CaseRadialLead Spacing0.343" (8.70mm)FeaturesGeneral PurposeSize / Dimension0.701" L x 0.339" W (17.80mm x 8.60mm)Height - Seated (Max)0.571" (14.50mm)	Category	Capacitors
CD19     Capacitance   7500pF     Tolerance   ±2%     Voltage - Rated   100V     Dielectric Material   Mica     Operating Temperature   -55°C ~ 125°C     Mounting Type   Through Hole     Package / Case   Radial     Lead Spacing   General Purpose     Size / Dimension   0.701" L x 0.339" W (17.80mm x 8.60mm)     Height - Seated (Max)   0.571" (14.50mm)		Mica and PTFE Capacitors
Capacitance7500pFTolerance±2%Voltage - Rated100VDielectric MaterialMicaOperating Temperature-55°C ~ 125°CMounting TypeThrough HolePackage / CaseRadialLead Spacing0.343" (8.70mm)FeaturesGeneral PurposeSize / Dimension0.701" L x 0.339" W (17.80mm x 8.60mm)Height - Seated (Max)0.571" (14.50mm)	Package	Radial
Tolerance±2%Voltage - Rated100VDielectric MaterialMicaOperating Temperature-55°C ~ 125°CMounting TypeThrough HolePackage / CaseRadialLead Spacing0.343" (8.70mm)FeaturesGeneral PurposeSize / Dimension0.701" L x 0.339" W (17.80mm x 8.60mm)Height - Seated (Max)0.571" (14.50mm)	Series	CD19
Voltage - Rated100VDielectric MaterialMicaOperating Temperature-55°C ~ 125°CMounting TypeThrough HolePackage / CaseRadialLead Spacing0.343" (8.70mm)FeaturesGeneral PurposeSize / Dimension0.701" L x 0.339" W (17.80mm x 8.60mm)Height - Seated (Max)0.571" (14.50mm)	Capacitance	7500pF
Dielectric MaterialMicaOperating Temperature-55°C ~ 125°CMounting TypeThrough HolePackage / CaseRadialLead Spacing0.343" (8.70mm)FeaturesGeneral PurposeSize / Dimension0.701" L x 0.339" W (17.80mm x 8.60mm)Height - Seated (Max)0.571" (14.50mm)	Tolerance	±2%
Operating Temperature-55°C ~ 125°CMounting TypeThrough HolePackage / CaseRadialLead Spacing0.343" (8.70mm)FeaturesGeneral PurposeSize / Dimension0.701" L x 0.339" W (17.80mm x 8.60mm)Height - Seated (Max)0.571" (14.50mm)	Voltage - Rated	100V
Nounting TypeThrough HolePackage / CaseRadialLead Spacing0.343" (8.70mm)FeaturesGeneral PurposeSize / Dimension0.701" L x 0.339" W (17.80mm x 8.60mm)Height - Seated (Max)0.571" (14.50mm)	Dielectric Material	Mica
Package / CaseRadialLead Spacing0.343" (8.70mm)FeaturesGeneral PurposeSize / Dimension0.701" L x 0.339" W (17.80mm x 8.60mm)Height - Seated (Max)0.571" (14.50mm)	Operating Temperature	-55°C ~ 125°C
Lead Spacing   0.343" (8.70mm)     Features   General Purpose     Size / Dimension   0.701" L x 0.339" W (17.80mm x 8.60mm)     Height - Seated (Max)   0.571" (14.50mm)	Mounting Type	Through Hole
Features   General Purpose     Size / Dimension   0.701" L x 0.339" W (17.80mm x 8.60mm)     Height - Seated (Max)   0.571" (14.50mm)	Package / Case	Radial
Size / Dimension 0.701" L x 0.339" W (17.80mm x 8.60mm)   Height - Seated (Max) 0.571" (14.50mm)	Lead Spacing	0.343" (8.70mm)
Height - Seated (Max) 0.571" (14.50mm)	Features	General Purpose
	Size / Dimension	0.701" L x 0.339" W (17.80mm x 8.60mm)
Report errors?	Height - Seated (Max)	0.571" (14.50mm)
		Report errors?

#### **CD19FA752GO3** Guarantees



Quality Guarantees

We provide 90 days warranty. \* If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



#### **Service Guarantees**

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

## **CD19FA752GO3 Payment Methods**





If you have any question about CD19FA752GO3, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com