


CD19FD162GO3

CD19FD162GO3 Information

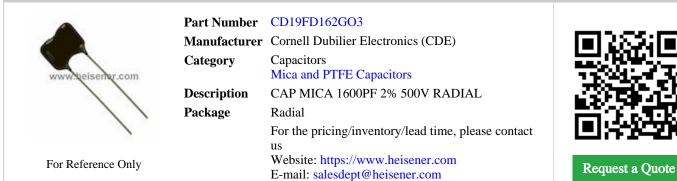

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



CD19FD162GO3 Specifications

ManufacturerCornell Dubilier Electronics (CDE)CategoryCapacitorsMica and PTFE CapacitorsPackageRadialSeriesCD19Capacitance1600pFTolerance±2%Voltage - Rated500VDielectric MaterialMicaOperating Temperature-55°C ~ 125°CMounting TypeThrough HolePackage / CaseRadialLead Spacing0.343" (8.70mm)FeaturesGeneral PurposeSize / Dimension0.661" L x 0.228" W (16.80mm x 5.80mm)		
CategoryCapacitorsMica and PTFE CapacitorsPackageRadialSeriesCD19Capacitance1600pFTolerance±2%Voltage - Rated500VDielectric MaterialMicaOperating Temperature-55°C ~ 125°CMounting TypeThrough HolePackage / CaseRadialLead Spacing0.343" (8.70mm)FeaturesGeneral PurposeSize / Dimension0.532" (13.50mm)	Manufacturer Part Number	CD19FD162GO3
Mica and PTFE CapacitorsPackageRadialSeriesCD19Capacitance1600pFTolerance±2%Voltage - Rated500VDielectric MaterialMicaOperating Temperature-55°C ~ 125°CMounting TypeThrough HolePackage / CaseRadialLead Spacing0.343" (8.70mm)FeaturesGeneral PurposeSize / Dimension0.661" L x 0.228" W (16.80mm x 5.80mm)Height - Seated (Max)0.532" (13.50mm)	Manufacturer	Cornell Dubilier Electronics (CDE)
PackageRadialPackageCD19Capacitance1600pFTolerance±2%Voltage - Rated500VDielectric MaterialMicaOperating Temperature-55°C ~ 125°CMounting TypeThrough HolePackage / CaseRadialLead Spacing0.343" (8.70mm)FeaturesGeneral PurposeSize / Dimension0.661" L x 0.228" W (16.80mm x 5.80mm)Height - Seated (Max)0.532" (13.50mm)	Category	Capacitors
Series CD19 Capacitance 1600pF Tolerance ±2% Voltage - Rated 500V Dielectric Material Mica Operating Temperature -55°C ~ 125°C Mounting Type Through Hole Package / Case Radial Lead Spacing 0.343" (8.70mm) Features General Purpose Size / Dimension 0.661" L x 0.228" W (16.80mm x 5.80mm) Height - Seated (Max) 0.532" (13.50mm)		Mica and PTFE Capacitors
Capacitance1600pFTolerance±2%Voltage - Rated500VDielectric MaterialMicaOperating Temperature-55°C ~ 125°CMounting TypeThrough HolePackage / CaseRadialLead Spacing0.343" (8.70mm)FeaturesGeneral PurposeSize / Dimension0.661" L x 0.228" W (16.80mm x 5.80mm)Height - Seated (Max)0.532" (13.50mm)	Package	Radial
Tolerance±2%Voltage - Rated500VDielectric MaterialMicaOperating Temperature-55°C ~ 125°CMounting TypeThrough HolePackage / CaseRadialLead Spacing0.343" (8.70mm)FeaturesGeneral PurposeSize / Dimension0.661" L x 0.228" W (16.80mm x 5.80mm)Height - Seated (Max)0.532" (13.50mm)	Series	CD19
Voltage - Rated500VDielectric MaterialMicaOperating Temperature-55°C ~ 125°CMounting TypeThrough HolePackage / CaseRadialLead Spacing0.343" (8.70mm)FeaturesGeneral PurposeSize / Dimension0.661" L x 0.228" W (16.80mm x 5.80mm)Height - Seated (Max)0.532" (13.50mm)	Capacitance	1600pF
Dielectric MaterialMicaOperating Temperature-55°C ~ 125°CMounting TypeThrough HolePackage / CaseRadialLead Spacing0.343" (8.70mm)FeaturesGeneral PurposeSize / Dimension0.661" L x 0.228" W (16.80mm x 5.80mm)Height - Seated (Max)0.532" (13.50mm)	Tolerance	±2%
Operating Temperature-55°C ~ 125°CMounting TypeThrough HolePackage / CaseRadialLead Spacing0.343" (8.70mm)FeaturesGeneral PurposeSize / Dimension0.661" L x 0.228" W (16.80mm x 5.80mm)Height - Seated (Max)0.532" (13.50mm)	Voltage - Rated	500V
Nounting TypeThrough HolePackage / CaseRadialLead Spacing0.343" (8.70mm)FeaturesGeneral PurposeSize / Dimension0.661" L x 0.228" W (16.80mm x 5.80mm)Height - Seated (Max)0.532" (13.50mm)	Dielectric Material	Mica
Package / CaseRadialLead Spacing0.343" (8.70mm)FeaturesGeneral PurposeSize / Dimension0.661" L x 0.228" W (16.80mm x 5.80mm)Height - Seated (Max)0.532" (13.50mm)	Operating Temperature	-55°C ~ 125°C
Lead Spacing 0.343" (8.70mm) Features General Purpose Size / Dimension 0.661" L x 0.228" W (16.80mm x 5.80mm) Height - Seated (Max) 0.532" (13.50mm)	Mounting Type	Through Hole
FeaturesGeneral PurposeSize / Dimension0.661" L x 0.228" W (16.80mm x 5.80mm)Height - Seated (Max)0.532" (13.50mm)	Package / Case	Radial
Size / Dimension 0.661" L x 0.228" W (16.80mm x 5.80mm) Height - Seated (Max) 0.532" (13.50mm)	Lead Spacing	0.343" (8.70mm)
Height - Seated (Max) 0.532" (13.50mm)	Features	General Purpose
	Size / Dimension	0.661" L x 0.228" W (16.80mm x 5.80mm)
Report errors?	Height - Seated (Max)	0.532" (13.50mm)
		Report errors?

CD19FD162GO3 Guarantees



Quality Guarantees

We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

CD19FD162GO3 Payment Methods





If you have any question about CD19FD162GO3, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com