


CD19FD202JO3

CD19FD202JO3 Information

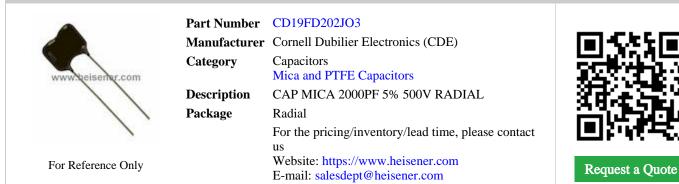

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



CD19FD202JO3 Specifications

Manufacturer Cornell Dubilier Electronics (CDE) Category Capacitors Mica and PTFE Capacitors Mica and PTFE Capacitors Package Radial Series CD19 Capacitance 2000pF Tolerance ±5% Voltage - Rated 500V Dielectric Material Mica Operating Temperature -55°C ~ 125°C Mounting Type Through Hole Package / Case Radial Lead Spacing 0.343" (8.70mm) Features General Purpose Size / Dimension 0.669" L x 0.240" W (17.00mm x 6.10mm)		
CategoryCapacitorsMica and PTFE CapacitorsPackageRadialPackageCD19Capacitance2000pFTolerance±5%Voltage - Rated500VDielectric MaterialMicaOperating Temperature-55°C ~ 125°CMounting TypeThrough HolePackage / CaseRadialLead Spacing0.343" (8.70mm)FeaturesGeneral PurposeSize / Dimension0.532" (13.50mm)	Manufacturer Part Number	CD19FD202JO3
Mica and PTFE CapacitorsPackageRadialSeriesCD19Capacitance2000pFTolerance±5%Voltage - Rated500VDielectric MaterialMicaOperating Temperature-55°C ~ 125°CMounting TypeThrough HolePackage / CaseRadialLead Spacing0.343" (8.70mm)FeaturesGeneral PurposeSize / Dimension0.669" L x 0.240" W (17.00mm x 6.10mm)Height - Seated (Max)0.532" (13.50mm)	Manufacturer	Cornell Dubilier Electronics (CDE)
PackageRadialPackageCD19Capacitance2000pFTolerance±5%Voltage - Rated500VDielectric MaterialMicaOperating Temperature-55°C ~ 125°CMounting TypeThrough HolePackage / CaseRadialLead Spacing0.343" (8.70mm)FeaturesGeneral PurposeSize / Dimension0.669" L x 0.240" W (17.00mm x 6.10mm)Height - Seated (Max)0.532" (13.50mm)	Category	Capacitors
Series CD19 Capacitance 2000pF Tolerance ±5% Voltage - Rated 500V Dielectric Material Mica Operating Temperature -55°C ~ 125°C Mounting Type Through Hole Package / Case Radial Lead Spacing 0.343" (8.70mm) Features General Purpose Size / Dimension 0.669" L x 0.240" W (17.00mm x 6.10mm) Height - Seated (Max) 0.532" (13.50mm)		Mica and PTFE Capacitors
Capacitance2000pFTolerance±5%Voltage - Rated500VDielectric MaterialMicaOperating Temperature-55°C ~ 125°CMounting TypeThrough HolePackage / CaseRadialLead Spacing0.343" (8.70mm)FeaturesGeneral PurposeSize / Dimension0.669" L x 0.240" W (17.00mm x 6.10mm)Height - Seated (Max)0.532" (13.50mm)	Package	Radial
Tolerance±5%Voltage - Rated500VDielectric MaterialMicaOperating Temperature-55°C ~ 125°CMounting TypeThrough HolePackage / CaseRadialLead Spacing0.343" (8.70mm)FeaturesGeneral PurposeSize / Dimension0.669" L x 0.240" W (17.00mm x 6.10mm)Height - Seated (Max)0.532" (13.50mm)	Series	CD19
Voltage - Rated500VDielectric MaterialMicaOperating Temperature-55°C ~ 125°CMounting TypeThrough HolePackage / CaseRadialLead Spacing0.343" (8.70mm)FeaturesGeneral PurposeSize / Dimension0.669" L x 0.240" W (17.00mm x 6.10mm)Height - Seated (Max)0.532" (13.50mm)	Capacitance	2000pF
Dielectric MaterialMicaOperating Temperature-55°C ~ 125°CMounting TypeThrough HolePackage / CaseRadialLead Spacing0.343" (8.70mm)FeaturesGeneral PurposeSize / Dimension0.669" L x 0.240" W (17.00mm x 6.10mm)Height - Seated (Max)0.532" (13.50mm)	Tolerance	$\pm 5\%$
Operating Temperature-55°C ~ 125°CMounting TypeThrough HolePackage / CaseRadialLead Spacing0.343" (8.70mm)FeaturesGeneral PurposeSize / Dimension0.669" L x 0.240" W (17.00mm x 6.10mm)Height - Seated (Max)0.532" (13.50mm)	Voltage - Rated	500V
Nounting TypeThrough HolePackage / CaseRadialLead Spacing0.343" (8.70mm)FeaturesGeneral PurposeSize / Dimension0.669" L x 0.240" W (17.00mm x 6.10mm)Height - Seated (Max)0.532" (13.50mm)	Dielectric Material	Mica
Package / CaseRadialLead Spacing0.343" (8.70mm)FeaturesGeneral PurposeSize / Dimension0.669" L x 0.240" W (17.00mm x 6.10mm)Height - Seated (Max)0.532" (13.50mm)	Operating Temperature	-55°C ~ 125°C
Lead Spacing 0.343" (8.70mm) Features General Purpose Size / Dimension 0.669" L x 0.240" W (17.00mm x 6.10mm) Height - Seated (Max) 0.532" (13.50mm)	Mounting Type	Through Hole
Features General Purpose Size / Dimension 0.669" L x 0.240" W (17.00mm x 6.10mm) Height - Seated (Max) 0.532" (13.50mm)	Package / Case	Radial
Size / Dimension 0.669" L x 0.240" W (17.00mm x 6.10mm) Height - Seated (Max) 0.532" (13.50mm)	Lead Spacing	0.343" (8.70mm)
Height - Seated (Max) 0.532" (13.50mm)	Features	General Purpose
	Size / Dimension	0.669" L x 0.240" W (17.00mm x 6.10mm)
Report errors?	Height - Seated (Max)	0.532" (13.50mm)
		Report errors?

CD19FD202JO3 Guarantees



Quality Guarantees

We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

CD19FD202JO3 Payment Methods





If you have any question about CD19FD202JO3, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com