


CIR030FP-14S-6S-F80-T113

CIR030FP-14S-6S-F80-T113 Information

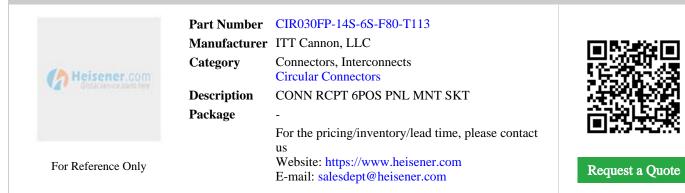

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



CIR030FP-14S-6S-F80-T113 Specifications

ManufacturerITT Cannon, LLCCategoryConnectors, InterconnectsPackage-SeriesMIL-DTL-5015, CIRConnector TypeReceptacle, Female SocketsNumber of Positions6Shell Size - Insert14S-6Mult, PTLangePanel Mount, FlangeMounting TypePanel Mount, FlangeTerminationCrimpStellsing TypeBayonet LockOrientationN(Normal)Ingress Protection-Shell Material, Finish-Contact Finish-Features-Voltage - Rated200VAC, 250VDCCurrent Rating13A		
CategoryConnectors, Interconnects Circular ConnectorsPackage-Package-SeriesMIL-DTL-5015, CIRConnector TypeReceptacle, Female SocketsNumber of Positions6Shell Size - Insert14S-6Shell Size, MIL-Mounting TypePanel Mount, FlangeTerminationCrimpFastening TypeBayonet LockOrientationN(Normal)Ingress Protection-Shell Material, Finish-Contact Finish-Fastener-Voltage - Rated200VAC, 250VDCCurrent Rating13A	Manufacturer Part Number	CIR030FP-14S-6S-F80-T113
Circular ConnectorsPackage-SeriesMIL-DTL-5015, CIRConnector TypeReceptacle, Female SocketsNumber of Positions6Shell Size - Insert14S-6Shell Size, MIL-Mounting TypePanel Mount, FlangeTerminationCrimpFastening TypeBayonet LockOrientationN (Normal)Ingress Protection-Shell Material, Finish-Contact Finish-Fastures-Voltage - Rated200VAC, 250VDCCurrent Rating13A	Manufacturer	ITT Cannon, LLC
Package-SeriesMIL-DTL-5015, CIRConnector TypeReceptacle, Female SocketsNumber of Positions6Shell Size - Insert14S-6Shell Size, MIL-Mounting TypePanel Mount, FlangeTerminationCrimpFastening TypeBayonet LockOrientation.Ingress Protection-Shell Material, Finish-Contact Finish-Features-Voltage - Rated200VAC, 250VDCCurrent Rating13A	Category	Connectors, Interconnects
SeriesMIL-DTL-5015, CIRConnector TypeReceptacle, Female SocketsNumber of Positions6Shell Size - Insert14S-6Shell Size, MIL-Mounting TypePanel Mount, FlangeTerminationCrimpFastening TypeBayonet LockOrientationN (Normal)Ingress Protection-Shell Material, Finish-Contact Finish-Features-Voltage - Rated200VAC, 250VDCCurrent Rating13A		Circular Connectors
Connector TypeReceptacle, Female SocketsNumber of Positions6Shell Size - Insert14S-6Shell Size, MIL-Mounting TypePanel Mount, FlangeTerminationCrimpFastening TypeBayonet LockOrientationN (Normal)Ingress Protection-Shell Material, Finish-Contact Finish-Features00VAC, 250VDCVoltage - Rated13A	Package	-
Number of Positions6Shell Size - Insert14S-6Shell Size, MIL-Mounting TypePanel Mount, FlangeTerminationCrimpFastening TypeBayonet LockOrientationN (Normal)Ingress Protection-Shell Material, Finish-Contact Finish-Features-Voltage - Rated200VAC, 250VDCCurrent Rating13A	Series	MIL-DTL-5015, CIR
Shell Size - Insert14S-6Shell Size, MIL-Mounting TypePanel Mount, FlangeTerminationCrimpFastening TypeBayonet LockOrientationN (Normal)Ingress Protection-Shell Material, Finish-Contact Finish-Features-Voltage - Rated200VAC, 250VDCCurrent Rating13A	Connector Type	Receptacle, Female Sockets
Shell Size, MIL-Mounting TypePanel Mount, FlangeTerminationCrimpFastening TypeBayonet LockOrientationN(Normal)Ingress Protection-Shell Material, Finish-Contact Finish-Features-Voltage - Rated200VAC, 250VDCCurrent Rating13A	Number of Positions	6
Mounting TypePanel Mount, FlangeTerminationCrimpFastening TypeBayonet LockOrientationN(Normal)Ingress Protection-Shell Material, Finish-Contact Finish-Features-Voltage - Rated200VAC, 250VDCCurrent Rating13A	Shell Size - Insert	14S-6
TerminationCrimpFastening TypeBayonet LockOrientationN(Normal)Ingress Protection-Shell Material, Finish-Contact Finish-Features-Voltage - Rated200VAC, 250VDCCurrent Rating13A	Shell Size, MIL	-
Fastening TypeBayonet LockOrientationN (Normal)Ingress Protection-Shell Material, Finish-Contact Finish-Features-Voltage - Rated200VAC, 250VDCCurrent Rating13A	Mounting Type	Panel Mount, Flange
OrientationN (Normal)Ingress Protection-Shell Material, Finish-Contact Finish-Features-Voltage - Rated200VAC, 250VDCCurrent Rating13A	Termination	Crimp
Ingress Protection-Shell Material, Finish-Contact Finish-Features-Voltage - Rated200VAC, 250VDCCurrent Rating13A	Fastening Type	Bayonet Lock
Shell Material, Finish-Contact Finish-Features-Voltage - Rated200VAC, 250VDCCurrent Rating13A	Orientation	N (Normal)
Contact Finish-Features-Voltage - Rated200VAC, 250VDCCurrent Rating13A	Ingress Protection	-
Features-Voltage - Rated200VAC, 250VDCCurrent Rating13A	Shell Material, Finish	-
Voltage - Rated200VAC, 250VDCCurrent Rating13A	Contact Finish	-
Current Rating 13A	Features	-
-	Voltage - Rated	200VAC, 250VDC
Report errors?	Current Rating	13A
		Report errors?

CIR030FP-14S-6S-F80-T113 Guarantees



Quality Guarantees

We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

CIR030FP-14S-6S-F80-T113 Payment Methods



If you have any question about CIR030FP-14S-6S-F80-T113, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com