

CLM-136-02-F-D

CLM-136-02-F-D Information

www.uneisener.com	Part Number Manufacturer	CLM-136-02-F-D Samtec Inc.	
	Category	Connectors, Interconnects Rectangular Connectors - Headers, Receptacles, Female Sockets	
	Description	1MM MICRO STRIPS	<u>- 12/00043</u> 3
~	Package	-	「同論読券」
For Reference Only		For the pricing/inventory/lead time, please contact us Website: https://www.heisener.com E-mail: salesdept@heisener.com	Request a Quote

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



CLM-136-02-F-D Specifications

Manufacturer Part NumberCLM-136-02-F-DManufacturerSamtee Inc.CategoryConnectors, InterconnectsPackage-SeriesCLMContact TypeReceptacles, Female SocketsContact TypeReceptacleStyleBoard to BoardNumber of Positions72Number of Rows2Row Spacing - Mating0.039" (1.00mm)Number of RowsSurface MountNumber of RowsSurface MountNumber of RowsSurface MountNumber of RowsSurface MountStriesSurface MountNumber of RowsSurface MountNumber of RowsSurface MountStriesSurface MountNumber of RowsSurface MountContact TippeSurface MountMounting TypeSurface MountFastening TypeSulderFastening TypeSulderInsulation ColorBlackInsulation FielghtMoust"(2.14mm)		
CategoryConnectors, Interconnects Rectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesCLMConnector TypeReceptacleConnector TypeFemale SocketStyleBoard to BoardNumber of Positions72Number of Positions LoadedAllPich - Mating0.039" (1.00mm)Number of Rows2Row Spacing - MatingSolderMounting TypeSurface MountFreminationSolderFreminationGoldContact Finish - MatingGoldInsulation ColorBiackInsulation Height0.084" (2.14mm)	Manufacturer Part Number	CLM-136-02-F-D
NumberRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesCLMConnector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions72Number of Positions LoadedAllPitch - Mating0.039" (1.00mm)Number of Rows2Row Spacing - Mating0.039" (1.00mm)Mounting TypeSurface MountTerminationSolderFastening TypeOldContact Finish - MatingGoldContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.084" (2.14mm)	Manufacturer	Samtec Inc.
Package-SeriesCLMConnector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions72Number of Positions LoadedAllPitch - Mating0.039" (1.00mm)Number of Rows2Row Spacing - Mating0.039" (1.00mm)Mounting TypeSurface MountFastening TypeSolderFastening TypeGoldContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.084" (2.14mm)	Category	Connectors, Interconnects
SeriesCLMConnector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions72Number of Positions LoadedAllPitch - Mating0.039" (1.00mm)Number of Rows2Row Spacing - Mating0.039" (1.00mm)Mounting TypeSurface MountFastening TypeSolderContact Finish - MatingGoldContact Finish Thickness - MatingGoldInsulation ColorBlackInsulation Height0.084" (2.14mm)		Rectangular Connectors - Headers, Receptacles, Female Sockets
Connector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions72Number of Positions LoadedAllPitch - Mating0.039" (1.00mm)Number of Rows2Row Spacing - Mating0.039" (1.00mm)Mounting TypeSurface MountFerminationSolderFastening TypePush-PullContact Finish - MatingGoldIonater Finish Thickness - MatingJin (0.08µm)Insulation ColorBlackInsulation Height0.084" (2.14mm)	Package	-
Contact TypeFemale SocketStyleBoard to BoardNumber of Positions72Number of Positions LoadedAllPitch - Mating0.039" (1.00mm)Number of Rows2Row Spacing - Mating0.039" (1.00mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.084" (2.14mm)	Series	CLM
StyleBoard to BoardNumber of Positions72Number of Positions LoadedAllPitch - Mating0.039" (1.00mm)Number of Rows2Row Spacing - Mating0.039" (1.00mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingBlackInsulation Color0.084" (2.14mm)	Connector Type	Receptacle
Number of Positions72Number of Positions LoadedAllPitch - Mating0.039" (1.00mm)Number of Rows2Row Spacing - Mating0.039" (1.00mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingJini (0.08µm)Insulation ColorBlackInsulation Height0.084" (2.14mm)	Contact Type	Female Socket
Number of Positions LoadedAllPitch - Mating0.039" (1.00mm)Number of Rows2Row Spacing - Mating0.039" (1.00mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingJµin (0.08µm)Insulation ColorBlackInsulation Height0.084" (2.14mm)	Style	Board to Board
Pitch - Mating0.039" (1.00mm)Number of Rows2Row Spacing - Mating0.039" (1.00mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingJini (0.08µm)Insulation ColorBlackInsulation Height0.084" (2.14mm)	Number of Positions	72
Number of Rows2Row Spacing - Mating0.039" (1.00mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingJµin (0.08µm)Insulation ColorBlackInsulation Height0.084" (2.14mm)	Number of Positions Loaded	All
Row Spacing - Mating0.039" (1.00mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingJin (0.08µm)Insulation ColorBlackInsulation Height0.084" (2.14mm)	Pitch - Mating	0.039" (1.00mm)
Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating3µin (0.08µm)Insulation ColorBlackInsulation Height0.084" (2.14mm)	Number of Rows	2
TerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating3µin (0.08µm)Insulation ColorBlackInsulation Height0.084" (2.14mm)	Row Spacing - Mating	0.039" (1.00mm)
Fastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating3µin (0.08µm)Insulation ColorBlackInsulation Height0.084" (2.14mm)	Mounting Type	Surface Mount
Contact Finish - MatingGoldContact Finish Thickness - Mating3µin (0.08µm)Insulation ColorBlackInsulation Height0.084" (2.14mm)	Termination	Solder
Contact Finish Thickness - Mating3µin (0.08µm)Insulation ColorBlackInsulation Height0.084" (2.14mm)	Fastening Type	Push-Pull
Insulation ColorBlackInsulation Height0.084" (2.14mm)	Contact Finish - Mating	Gold
Insulation Height 0.084" (2.14mm)	Contact Finish Thickness - Mating	3μin (0.08μm)
	Insulation Color	Black
	Insulation Height	0.084" (2.14mm)
Contact Length - Post -	Contact Length - Post	-
Operating Temperature $-55^{\circ}C \sim 125^{\circ}C$	Operating Temperature	-55°C ~ 125°C
Material Flammability Rating UL94 V-0	Material Flammability Rating	UL94 V-0

Contact Finish - Post	Tin
Mated Stacking Heights	-
Ingress Protection	-
Features	-
	Report errors?

CLM-136-02-F-D Guarantees



Quality Guarantees


We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

CLM-136-02-F-D Payment Methods

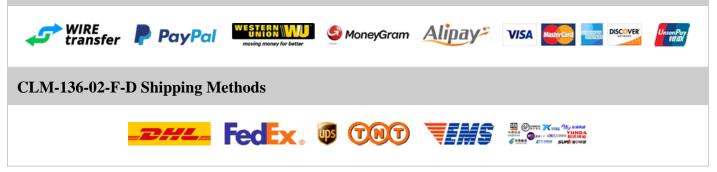

If you have any question about CLM-136-02-F-D, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com