

CLM-149-02-L-D-A

CLM-149-02-L-D-A Information



Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



CLM-149-02-L-D-A Specifications

Manufacturer Part NumberCLM-149-02-L-D-AManufacturerSamtee Inc.CategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesCLMConnector TypeReceptacleConnector TypeReceptacleConnector TypeBoard to BoardStyleBoard to BoardNumber of Positions0.39" (1.00mm)Number of Positions LoadedJNumber of Rows2Row Spacing - Mating0.039" (1.00mm)Mounting TypeSurface MountFastening TypeSurface MountContact Finish - MatingGoldContact Finish - MatingGoldContact Finish - MatingInjui (0.25µm)Insulation ColorBlackInsulation Fleight0.084" (2.14mm)Contact Length - Posti-Cortact Length - Posti-Cortact Length - Posti-Contact Length - Posti- <tr< th=""><th></th><th></th></tr<>		
CategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesCLMConnector TypeReceptacles, ActiveContact TypeReceptaclesStyleBoard to BoardNumber of Positions98Number of Positions LoadedAllNumber of Rows2Number of Rows0.039° (1.00mm)Number of Rows0.039° (1.00mm)Number of RowsSurface MountPreminationSolderForting TypeSurface MountForting TypeSolderContact Finish - MatingGoldContact Finish FuktingsJuni (0.25µm)Insulation ColorBackInsulation Height0.084° (2.14mm)Contact Length - Post-SolerSolerFinish Thickness - MatingSolerInsulation HeightSolerSolerSolerSoler 1.25°CSoler	Manufacturer Part Number	CLM-149-02-L-D-A
NumberRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesCLMConnector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions98Number of Positions LoadedAllPitch - Mating0.039" (1.00mm)Number of Rows2Row Spacing - Mating0.039" (1.00mm)Mounting TypeSufface MountYenrinationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingI.0uin (0.25µm)Insulation ColorBlackInsulation Height0.084" (1.41mm)Contact Length - Post-Songer TypeSicherFinaling TypeSicherStudion TypeSicherStudion ColorSicherStudion ColorSicherStudion TypeSicherStudion TypeSicher<	Manufacturer	Samtec Inc.
Package-SeriesCLMConnector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions98Number of Positions LoadedAllPitch - Mating0.039" (1.00mm)Number of Rows2Row Spacing - Mating0.039" (1.00mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish - MatingIlpuin (0.25µm)Insulation ColorBlackInsulation Height0.084" (2.14mm)Contact Length - Post-Sore - 125°C-	Category	Connectors, Interconnects
SeriesCLMConnector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions98Number of Positions LoadedAllPitch - Mating0.039" (1.00mm)Number of Rows2Row Spacing - Mating0.039" (1.00mm)Mounting TypeSurface MountYenrinationSolderContact Finish - MatingGoldContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.084" (2.14mm)Contact Length - Post-SolerSiderInsulation Height0.59°C ~ 125°C		Rectangular Connectors - Headers, Receptacles, Female Sockets
Connector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions98Number of Positions LoadedAllPitch - Mating0.039" (1.00mm)Number of Rows2Row Spacing - Mating0.039" (1.00mm)Mounting TypeSurface MountTerminationSolderForster Finish - MatingGoldContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.084" (2.14mm)Contact Length - Post-Store - 212°C55°C ~ 125°C	Package	-
Contact TypeFemale SocketStyleBoard to BoardNumber of Positions98Number of Positions LoadedAllPitch - Mating0.039" (1.00mm)Number of Rows2Row Spacing - Mating0.039" (1.00mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - Mating0.04Contact Finish Thickness - Mating0.084" (2.14mm)Insulation Height0.084" (2.14mm)Contact Length - Post-Operating Temperature-55°C ~ 125°C	Series	CLM
StyleBoard to BoardNumber of Positions98Number of Positions LoadedAllPitch - Mating0.039" (1.00mm)Number of Rows2Row Spacing - Mating0.039" (1.00mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.084" (2.14mm)Contact Length - Post-Operating Temperature-55°C ~ 125°C	Connector Type	Receptacle
Number of Positions 98 Number of Positions Loaded All Pitch - Mating 0.039" (1.00mm) Number of Rows 2 Row Spacing - Mating 0.039" (1.00mm) Mounting Type Surface Mount Termination Surface Mount Fastering Type Push-Pull Contact Finish - Mating Gold Insulation Color Black Insulation Height 0.084" (2.14mm) Operating Temperature -55°C ~ 125°C	Contact Type	Female Socket
Number of Positions LoadedAllPitch - Mating0.039" (1.00mm)Number of Rows2Row Spacing - Mating0.039" (1.00mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingIloµin (0.25µm)Insulation ColorBlackInsulation Height0.084" (2.14mm)Contact Length - Post-Operating Temperature-55°C ~ 125°C	Style	Board to Board
Pitch - Mating0.039" (1.00mm)Number of Rows2Row Spacing - Mating0.039" (1.00mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingIlquin (0.25µm)Insulation ColorBlackInsulation Height0.084" (2.14mm)Contact Length - Post-Operating Temperature-55°C ~ 125°C	Number of Positions	98
Number of Rows2Row Spacing - Mating0.039" (1.00mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.084" (2.14mm)Contact Length - Post-Operating Temperature-55°C ~ 125°C	Number of Positions Loaded	All
Row Spacing - Mating0.039" (1.00mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.084" (2.14mm)Contact Length - Post-Operating Temperature-55°C ~ 125°C	Pitch - Mating	0.039" (1.00mm)
Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.084" (2.14mm)Contact Length - Post-Operating Temperature-55°C ~ 125°C	Number of Rows	2
TerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.084" (2.14mm)Contact Length - Post-Operating Temperature-55°C ~ 125°C	Row Spacing - Mating	0.039" (1.00mm)
Fastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.084" (2.14mm)Contact Length - Post-Operating Temperature-55°C ~ 125°C	Mounting Type	Surface Mount
Contact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.084" (2.14mm)Contact Length - Post-Operating Temperature-55°C ~ 125°C	Termination	Solder
Contact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.084" (2.14mm)Contact Length - Post-Operating Temperature-55°C ~ 125°C	Fastening Type	Push-Pull
Insulation ColorBlackInsulation Height0.084" (2.14mm)Contact Length - Post-Operating Temperature-55°C ~ 125°C	Contact Finish - Mating	Gold
Insulation Height0.084" (2.14mm)Contact Length - Post-Operating Temperature-55°C ~ 125°C	Contact Finish Thickness - Mating	10µin (0.25µm)
Contact Length - Post-Operating Temperature-55°C ~ 125°C	Insulation Color	Black
Operating Temperature $-55^{\circ}C \sim 125^{\circ}C$	Insulation Height	0.084" (2.14mm)
	Contact Length - Post	-
Material Elemenability Pating UI 04 V 0	Operating Temperature	-55°C ~ 125°C
	Material Flammability Rating	UL94 V-0

Contact Finish - Post	Tin
Mated Stacking Heights	-
Ingress Protection	-
Features	Board Guide
	Report errors?

CLM-149-02-L-D-A Guarantees



Quality Guarantees


We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

CLM-149-02-L-D-A Payment Methods

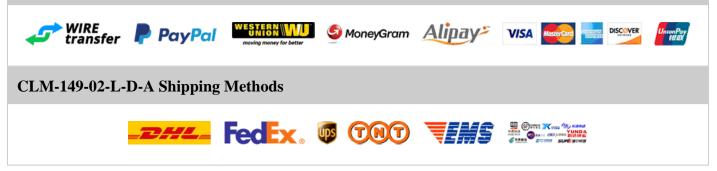

If you have any question about CLM-149-02-L-D-A, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com