

CLP-106-02-SM-D

CLP-106-02-SM-D Information

Category	rer Samtec Inc. Connectors, Interconnects Rectangular Connectors - Headers, Receptacles, Female Sockets	
Description	.050" X .050	11.7 11.22
Package	-	目記に新い
For Reference Only	For the pricing/inventory/lead time, please contact us Website: https://www.heisener.com E-mail: salesdept@heisener.com	Request a Quote

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



CLP-106-02-SM-D Specifications

Manufacturer Part NumberCLP-106-02-SM-DManufacturerSamtee Inc.CategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesCLPConnector TypeReceptacles, Genetacles, Female SocketsForder TypeReceptacles, Genetacles, Female SocketsSorder TypeReceptacles, Genetacles, Ge		
CategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesCLPConnector TypeReceptacleConnector TypeReceptacleContact TypeBeard BoardStyleBoard BoardNumber of Positions12Number of Positions LoadedAllPich - Mating0.050°(1.27mm)Number of Rows2Row Spacing - MatingSolderMounting TypeSuface MountFreminationSolderFortarty SpacingGoldContact Finish - MatingGoldContact Finish - MatingSoliderInsulation ColorJain(0.76m)Insulation Finish - MatingSoliderInsulation Finish - MatingSolider </td <td>Manufacturer Part Number</td> <td>CLP-106-02-SM-D</td>	Manufacturer Part Number	CLP-106-02-SM-D
IncludeRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesCLPConnector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions12Number of Positions LoadedAllPitch - Mating0.50° (1.27mm)Number of Rows2Row Spacing - MatingSolderMounting TypeSolderPrimitationSolderForminationSolderContact Finish - MatingGoldContact Finish - MatingGoldInsulation ColorBlackInsulation FinishBlackInsulation Finish0.50% (1.24mm)Contact Finish - MatingSolderContact Finish - MatingGoldContact Finish - MatingGoldInsulation FinishBlackInsulation FinishSolderFinish - MatingSolderContact Finish - PostSolderContact Finish - Post<	Manufacturer	Samtec Inc.
Package-SeriesCLPConnector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions12Number of Positions LoadedAllPitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountFastening TypeSurface MountContact Finish - MatingGoldContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.084" (2.14mm)Contact Length - Post-	Category	Connectors, Interconnects
SeriesCLPConnector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions12Number of Positions LoadedAllPitch - Mating0.050° (1.27mm)Number of Rows2Row Spacing - Mating0.050° (1.27mm)Mounting TypeSurface MountFastening TypeSurface MountContact Finish - MatingGolderContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.084" (2.14mm)Contact Length - Post-		Rectangular Connectors - Headers, Receptacles, Female Sockets
Connector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions12Number of Positions LoadedAllPitch - Mating0.050° (1.27mm)Number of Rows2Row Spacing - Mating0.050° (1.27mm)Mounting TypeSurface MountFastening TypeSolderContact Finish - MatingGoldContact Finish - MatingJun (0.76µm)Insulation ColorBlackInsulation Height0.084° (2.14mm)Contact Length - Post-	Package	-
Contact TypeFemale SocketStyleBoard to BoardNumber of Positions12Number of Positions LoadedAllPitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.084" (2.14mm)Contact Length - Post-	Series	CLP
StyleBoard to BoardNumber of Positions12Number of Positions LoadedAllPitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting Type0.050" (1.27mm)TerminationSurface MountFastening TypeSolderContact Finish - MatingGoldContact Finish Thickness - Mating30µin (0.76µm)Insulation ColorBlackInsulation Height0.084" (2.14mm)Contact Length - Post-	Connector Type	Receptacle
Number of Positions12Number of Positions LoadedAllPitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.084" (2.14mm)Contact Length - Post-	Contact Type	Female Socket
Number of Positions LoadedAllPitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating30µin (0.76µm)Insulation ColorBlackInsulation Height0.084" (2.14mm)Contact Length - Post-	Style	Board to Board
Pitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating3µin (0.76µm)Insulation ColorBlackInsulation Height0.084" (2.14mm)Contact Length - Post-	Number of Positions	12
Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating30µin (0.76µm)Insulation ColorBlackInsulation Height0.084" (2.14mm)Contact Length - Post-	Number of Positions Loaded	All
Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating30µin (0.76µm)Insulation ColorBlackInsulation Height0.084" (2.14mm)Contact Length - Post-	Pitch - Mating	0.050" (1.27mm)
Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating30µin (0.76µm)Insulation ColorBlackInsulation Height0.084" (2.14mm)Contact Length - Post-	Number of Rows	2
TerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating30µin (0.76µm)Insulation ColorBlackInsulation Height0.084" (2.14mm)Contact Length - Post-	Row Spacing - Mating	0.050" (1.27mm)
Fastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating30µin (0.76µm)Insulation ColorBlackInsulation Height0.084" (2.14mm)Contact Length - Post-	Mounting Type	Surface Mount
Contact Finish - MatingGoldContact Finish Thickness - Mating30µin (0.76µm)Insulation ColorBlackInsulation Height0.084" (2.14mm)Contact Length - Post-	Termination	Solder
Contact Finish Thickness - Mating30µin (0.76µm)Insulation ColorBlackInsulation Height0.084" (2.14mm)Contact Length - Post-	Fastening Type	Push-Pull
Insulation ColorBlackInsulation Height0.084" (2.14mm)Contact Length - Post-	Contact Finish - Mating	Gold
Insulation Height0.084" (2.14mm)Contact Length - Post-	Contact Finish Thickness - Mating	30µin (0.76µm)
Contact Length - Post -	Insulation Color	Black
-	Insulation Height	0.084" (2.14mm)
Operating Temperature -55°C ~ 125°C	Contact Length - Post	-
	Operating Temperature	-55°C ~ 125°C
Material Flammability Rating UL94 V-0	Material Flammability Rating	UL94 V-0

Contact Finish - Post	Tin
Mated Stacking Heights	-
Ingress Protection	-
Features	-
	Report errors?

CLP-106-02-SM-D Guarantees



Quality Guarantees


We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

CLP-106-02-SM-D Payment Methods

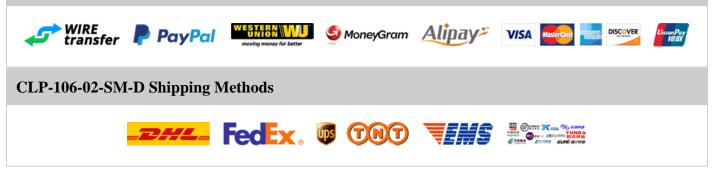

If you have any question about CLP-106-02-SM-D, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com