

CLP-111-02-L-D-BE-A

CLP-111-02-L-D-BE-A Information



Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



CLP-111-02-L-D-BE-A Specifications

Manufacturer Part NumberCLP-111-02-L-D-BE-AManufacturerSamtee Inc.CategoryConnectors, InterconnectsPackage-Package-SeriesCLPConnector TypeReceptacle, BeturgContact TypeFemale SocketSyleBoard to BoardNumber of Positions2Number of Positions Loaded0.050° (1.27mm)Number of Rows0.050° (1.27mm)Number of Rows0.050° (1.27mm)Mounting TypeSolderSolderSolderString TypeOut of Concent SolderString TypeSolderString TypeSolder <th></th> <th></th>		
CategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesCLPConnector TypeReceptacle, Bottom EntryContact TypeBeade SocketStyleBoard to BoardNumber of Positions22Number of Positions LoadedAllPitch - Mating0.50° (1.27mm)Number of Rows2Row Spacing - MatingSolderTerminationSolderTerminationSolderFastening TypeGoldContact Finish - MatingGoldContact Finish Thickness - MatingGoldInsulation ColorBackInsulation Height0.084° (2.14mm)Contact Length - Post-Contact Length - Post-	Manufacturer Part Number	CLP-111-02-L-D-BE-A
PackageRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesCLPConnector TypeReceptacle, Bottom EntryContact TypeBoard to BoardStyleBoard to BoardNumber of Positions22Number of Positions LoadedAllPitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting Type0.050" (1.27mm)Yenning ConderSolderFerninationSolderFastening TypeGoldContact Finish - MatingGoldContact Finish Thickness - MatingIlpin (0.25µm)Insulation ColorBlackInsulation Height0.084" (2.14mm)Contact Length - Post-	Manufacturer	Samtec Inc.
Package-SeriesCLPConnector TypeReceptacle, Bottom EntryContact TypeFemale SocketStyleBoard to BoardNumber of Positions22Number of Positions LoadedAllPitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSufface MountTerminationSolderFastening TypeSolderContact Finish - MatingGoldContact Finish - MatingIojuin (0.25µm)Insulation ColorBlackInsulation Height0.084" (2.14mm)Contact Length - Post-	Category	Connectors, Interconnects
SeriesCLPConnector TypeReceptacle, Bottom EntryContact TypeFemale SocketStyleBoard to BoardNumber of Positions22Number of Positions LoadedAllPitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountFastening TypeSurface MountContact Finish - MatingGoldContact Finish - MatingGoldContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.084" (2.14mm)Contact Length - Post-		Rectangular Connectors - Headers, Receptacles, Female Sockets
Connector TypeReceptacle, Bottom EntryContact TypeFemale SocketStyleBoard to BoardNumber of Positions22Number of Positions LoadedAllPitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountFarminationSolderFastening TypePush-PullContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.084" (2.14mm)Contact Length - Post-	Package	-
Contact TypeFemale SocketStyleBoard to BoardNumber of Positions22Number of Positions LoadedAllPitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldInsulation ColorIloµin (0.25µm)Insulation Height0.084" (2.14mm)Contact Length - Post-	Series	CLP
StyleBoard to BoardStyleBoard to BoardNumber of Positions22Number of Positions LoadedAllPitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.084" (2.14mm)Contact Length - Post-	Connector Type	Receptacle, Bottom Entry
Number of Positions22Number of Positions LoadedAllPitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.084" (2.14mm)Contact Length - Post-	Contact Type	Female Socket
Number of Positions LoadedAllPitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.084" (2.14mm)Contact Length - Post-	Style	Board to Board
Pitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingIupin (0.25µm)Insulation ColorBlackInsulation Height0.084" (2.14mm)Contact Length - Post-	Number of Positions	22
Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.084" (2.14mm)Contact Length - Post-	Number of Positions Loaded	All
Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.084" (2.14mm)Contact Length - Post-	Pitch - Mating	0.050" (1.27mm)
Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.084" (2.14mm)Contact Length - Post-	Number of Rows	2
TerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.084" (2.14mm)Contact Length - Post-	Row Spacing - Mating	0.050" (1.27mm)
Fastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.084" (2.14mm)Contact Length - Post-	Mounting Type	Surface Mount
Contact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.084" (2.14mm)Contact Length - Post-	Termination	Solder
Contact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.084" (2.14mm)Contact Length - Post-	Fastening Type	Push-Pull
Insulation ColorBlackInsulation Height0.084" (2.14mm)Contact Length - Post-	Contact Finish - Mating	Gold
Insulation Height0.084" (2.14mm)Contact Length - Post-	Contact Finish Thickness - Mating	10μin (0.25μm)
Contact Length - Post -	Insulation Color	Black
-	Insulation Height	0.084" (2.14mm)
Operating Temperature $-55^{\circ}C \sim 125^{\circ}C$	Contact Length - Post	-
	Operating Temperature	-55°C ~ 125°C
Material Flammability Rating UL94 V-0	Material Flammability Rating	UL94 V-0

Contact Finish - Post	Tin
Mated Stacking Heights	-
Ingress Protection	-
Features	Board Guide
	Report errors?

CLP-111-02-L-D-BE-A Guarantees



Quality Guarantees


We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

CLP-111-02-L-D-BE-A Payment Methods

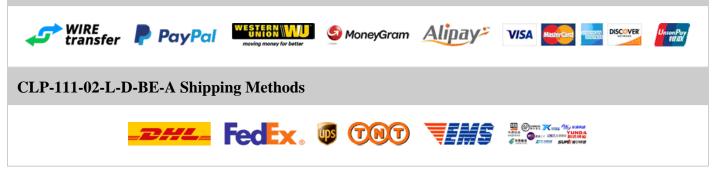

If you have any question about CLP-111-02-L-D-BE-A, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com