

CLP-111-02-LM-D

CLP-111-02-LM-D Information

suarr.heisener.com	Part Number Manufacturer Category	CLP-111-02-LM-D Samtec Inc. Connectors, Interconnects Rectangular Connectors - Headers, Receptacles, Female Sockets		
	Description	.050" X .050	10 JULE	
	Package	-	「同教授業は	
For Reference Only		For the pricing/inventory/lead time, please contact		
		Website: https://www.heisener.com	Request a Quote	
		E-mail: salesdept@heisener.com		

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



CLP-111-02-LM-D Specifications

Manufacturer Part NumberCLP-111-02-LM-DManufacturerSamtee Inc.CategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesCLPConnector TypeReceptacleConnector TypeReceptacleConnector TypeBoardStyleBoard to BoardNumber of Positions22Number of Positions LoadedAllPich - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountFastening TypeSurface MountContact Finish - MatingGoldContact Finish - MatingGoldContact Finish - MatingIpin (0.25µm)Insulation ColorBlackInsulation Fleipt0.084" (2.14mm)Contact Length - Post-Cortact Length - Post-Matariel Eramenability Rearing1164 V 0				
CategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesCLPConnector TypeReceptacles, ActiveContact TypeBoardStyleBoard to BoardNumber of Positions2Number of Positions LoadedAllPitch - Mating0.50° (1.27mm)Number of Rows2Row Spacing - Mating0.50° (1.27mm)Number of Rows0.50° (1.27mm)FerninationSolderForting TypeSurface MountForting TypeSurface MountForting TypeSurface MountContact Finish - MatingGoldInsulation ColorBackInsulation Height0.084° (2.4mm)Insulation Height0.50° (2.15°C	Manufacturer Part Number	CLP-111-02-LM-D		
NumberRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesCLPConnector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions22Number of Positions LoadedAllPitch - Mating0.50°(1.27mm)Number of Rows2Row Spacing - Mating0.50°(1.27mm)Mounting TypeSuface MountYerninationSolderFastening TypeSolderFontact Finish - MatingGoldContact Finish Thickness - MatingIpin (0.25µm)Insulation ColorBlackInsulation Height0.084"(1.41mm)Contact Length - Post-Sore - 125°C-	Manufacturer	Samtec Inc.		
Package-SeriesCLPConnector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions22Number of Positions LoadedAllPitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingIlpuin (0.25µm)Insulation ColorBlackInsulation Height0.084" (2.14mm)Contact Length - Post-Operating Temperature-55°C ~ 125°C	Category	Connectors, Interconnects		
SeriesCLPConnector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions22Number of Positions LoadedAllPitch - Mating0.050° (1.27mm)Number of Rows2Row Spacing - Mating0.050° (1.27mm)Mounting TypeSurface MountTerminationSolderContact Finish - MatingGoldContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.084" (2.14mm)Contact Length - Post-Contact Funish - Mating55°C ~ 125°C		Rectangular Connectors - Headers, Receptacles, Female Sockets		
Connector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions22Number of Positions LoadedAllPitch - Mating0.050° (1.27mm)Number of Rows2Row Spacing - Mating0.050° (1.27mm)Mounting TypeSurface MountTerminationSolderContact Finish - MatingGoldContact Finish - MatingIojun (0.25µm)Insulation ColorBlackInsulation Height0.084" (2.14mm)Contact Length - Post-Soler55°C ~ 125°C	Package	-		
Contact TypeFemale SocketStyleBoard to BoardNumber of Positions22Number of Positions LoadedAllPitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - Mating0.04Contact Finish Thickness - Mating0.084" (2.14mm)Insulation Color-Insulation Height0.084" (2.14mm)Contact Length - Post-Operating Temperature-55°C ~ 125°C	Series	CLP		
StyleBoard to BoardNumber of Positions22Number of Positions LoadedAllPitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.084" (2.14mm)Contact Length - Post-Operating Temperature-55°C ~ 125°C	Connector Type	Receptacle		
Number of Positions 22 Number of Positions Loaded All Pitch - Mating 0.050" (1.27mm) Number of Rows 2 Row Spacing - Mating 0.050" (1.27mm) Mounting Type Surface Mount Termination Surface Mount Fastering Type Push-Pull Contact Finish - Mating Gold Insulation Color Black Insulation Height 0.084" (2.14mm) Operating Temperature -55°C ~ 125°C	Contact Type	Female Socket		
Number of Positions LoadedAllPitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingBlackInsulation ColorBlackInsulation Height0.084" (2.14mm)Contact Length - Post-Operating Temperature-55°C ~ 125°C	Style	Board to Board		
Pitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingIlquin (0.25µm)Insulation ColorBlackInsulation Height0.084" (2.14mm)Contact Length - Post-Operating Temperature-55°C ~ 125°C	Number of Positions	22		
Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.084" (2.14mm)Contact Length - Post-Operating Temperature-55°C ~ 125°C	Number of Positions Loaded	All		
Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.084" (2.14mm)Contact Length - Post-Operating Temperature-55°C ~ 125°C	Pitch - Mating	0.050" (1.27mm)		
Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.084" (2.14mm)Contact Length - Post-Operating Temperature-55°C ~ 125°C	Number of Rows	2		
TerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.084" (2.14mm)Contact Length - Post-Operating Temperature-55°C ~ 125°C	Row Spacing - Mating	0.050" (1.27mm)		
Fastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.084" (2.14mm)Contact Length - Post-Operating Temperature-55°C ~ 125°C	Mounting Type	Surface Mount		
Contact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.084" (2.14mm)Contact Length - Post-Operating Temperature-55°C ~ 125°C	Termination	Solder		
Contact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.084" (2.14mm)Contact Length - Post-Operating Temperature-55°C ~ 125°C	Fastening Type	Push-Pull		
Insulation ColorBlackInsulation Height0.084" (2.14mm)Contact Length - Post-Operating Temperature-55°C ~ 125°C	Contact Finish - Mating	Gold		
Insulation Height0.084" (2.14mm)Contact Length - Post-Operating Temperature-55°C ~ 125°C	Contact Finish Thickness - Mating	10µin (0.25µm)		
Contact Length - Post-Operating Temperature-55°C ~ 125°C	Insulation Color	Black		
Operating Temperature $-55^{\circ}C \sim 125^{\circ}C$	Insulation Height	0.084" (2.14mm)		
	Contact Length - Post	-		
Material Flammability Pating UII 94 V 0	Operating Temperature	-55°C ~ 125°C		
Waterial Flammability Rating 01.94 V-0	Material Flammability Rating	UL94 V-0		

Contact Finish - Post	Tin		
Mated Stacking Heights	-		
Ingress Protection	-		
Features	-		
		Report errors	?

CLP-111-02-LM-D Guarantees



Quality Guarantees


We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

CLP-111-02-LM-D Payment Methods

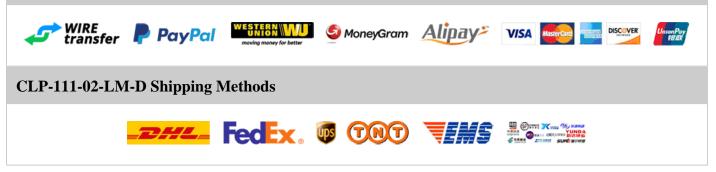

If you have any question about CLP-111-02-LM-D, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com